


File E61760(N)

59025 Firecracker Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- UL recognised
- Choice of normally open, normally closed or change over contacts
- Customer defined sensitivity
- Choice of cable length and connector


Benefits

- Quick and easy to install
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination

Applications

- Position and limit sensing
- Security
- Level sensing
- Linear actuators

DIMENSIONS (in) mm

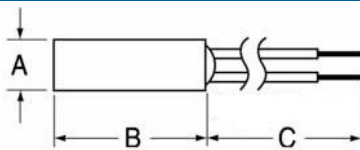

	A Max	B Max	C NOM.
57025	(.245) 6,22	(1.000) 25,40	-
59025	(.245) 6,22	(1.000) 25,40	Table 3 ± (.393) 10,00

SCHEMATICS	Switch Type
	1 & 2
	3
	4

CUSTOMER OPTIONS - Switching Specifications

TABLE 1 Contact Type			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Switch Type			1	2	3	4
Power	Power	Watt - max.	10	10	5	5
	Switching	Vdc - max.	200	300	175	175
Voltage	Breakdown	Vdc - min.	250	450	200	200
	Switching	A - max.	0.5	0.5	0.25	0.25
Current	Carry	A - max.	1.2	1.5	1.5	1.5
	Contact, Initial	Ω - max.	0.2	0.2	0.2	0.2
Resistance	Insulation	Ω - min.	10 ¹⁰	10 ¹⁰	10 ⁹	10 ⁹
	Contact	pF - typ.	0.3	0.2	0.3	0.3
Capacitance	Operating	°C	-40 to +105	-20 to +105	-40 to +105	-40 to +105
	Storage	°C	-65 to +105	-65 to +105	-65 to +105	-65 to +105
Temperature	Operate	ms - max.	1.0	1.0	3.0	3.0
	Release	ms - max.	1.0	1.0	3.0	3.0
Time	11ms 1/2 sine	G - max.	100	100	50	50
	50-2000 Hz	G - max.	30	30	30	30
Shock						
Vibration						


CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2 Sensitivity Options:- Activate Distances are approximate using Hamlin 57025 actuator as illustrated Switch AT before modification							
Select Option	S	T	U	V			
Switch Type	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range
1 Normally Open	12-18	(.315) 8.0	17-23	(.236) 6.0	22-28	(.197) 5.0	27-33
2 High Voltage		8.0		6.0		5.0	
3 Change Over	15-20	(.276) 7.0	20-25	(.216) 5.5	25-30	(.177) 4.5	
4 Normally Closed							

TABLE 3 Cable Type:- 24 AWG 7/32 PVC 105°C UL1430/UL1569		TABLE 4 Termination Options:-	
SELECT OPTION	CABLE LENGTH (in) mm	SELECT OPTION	DESCRIPTION (2 WIRE VERSIONS ILLUSTRATED)
01	(3.94)100	A	Tinned leads (3.8±0.76)mm
02	(11.81) 300	F	Untinned leads (6.4±0.76)mm
03	(19.69) 500		
04	(29.53) 750		
05	(39.37)1000		

ORDERING INFORMATION

N.B. 57025 actuator sold separately

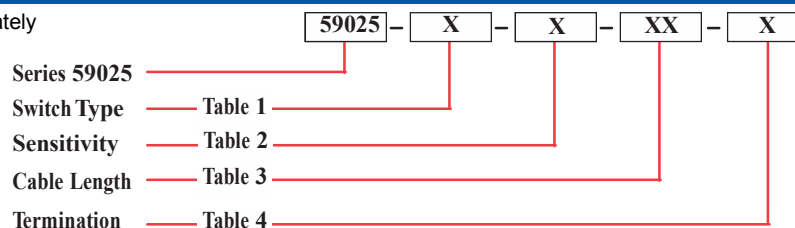

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com Hamlin
UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6142 923920 • Fax: +49 (0) 6142 923921 • Email: sales.de@hamlin.com
Hametrol France Tel: +33 (0) 1 6047 3000 • Fax: +33 (0) 1 6015 9136 • Email: sales.fr@hamlin.com

Issue No: 5 DCR No.: B8163 Issue: Flash Du Date: 9/26/2011

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.