



## FEATURES

- RoHS Compliant
- Single Isolated Output
- 1kVDC Isolation
- Efficiency up to 80%
- Power Density 1.45W/cm<sup>3</sup>
- UL 94V-0 Package Material
- Footprint from 0.69cm<sup>2</sup>
- Industry Standard Pinout
- 24V & 48V Input
- 5V, 9V, 12V and 15V Output
- No Heatsink Required
- Internal SMD Construction
- Fully Encapsulated with Toroidal Magnetics
- No External Components Required
- Custom Solutions Available

## DESCRIPTION

The NME series of DC/DC Converters is particularly suited to isolating and/or converting DC power rails. The galvanic isolation allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist.

# NME 24V & 48V Series

Isolated 1W Single Output DC/DC Converters

## SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF <sup>1</sup>	Package Style	DIP
	V	V	mA	%	pF	kHrs		
<b>NME2405DC</b>	24	5	200	70	40	201		
<b>NME2409DC</b>	24	9	111	75	59	185		
<b>NME2412DC</b>	24	12	83	80	78	163		
<b>NME2415DC</b>	24	15	66	80	79	136		
<b>NME2405SC</b>	24	5	200	70	40	201		
<b>NME2409SC</b>	24	9	111	75	59	185		
<b>NME2412SC</b>	24	12	83	80	78	163		
<b>NME2415SC</b>	24	15	66	80	79	136		

## Obsolete

### Recommended Alternative

<b>NME4805DC</b>	48	5	200	70	32	213	DIP	MER1S4805SC
<b>NME4809DC</b>	48	9	111	75	50	194	DIP	MER1S4809SC
<b>NME4812DC</b>	48	12	83	80	76	164	DIP	MER1S4812SC
<b>NME4815DC</b>	48	15	66	80	75	140	DIP	MER1S4815SC
<b>NME4805SC</b>	48	5	200	70	32	213	SIP	MER1S4805SC
<b>NME4809SC</b>	48	9	111	75	50	194	SIP	MER1S4809SC
<b>NME4812SC</b>	48	12	83	80	76	164	SIP	MER1S4812SC
<b>NME4815SC</b>	48	15	66	80	75	140	SIP	MER1S4815SC

When operated with additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

## INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 24V input types	21.6	24	26.4	V
	Continuous operation, 48V input types	43.2	48	52.8	

## OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power <sup>2</sup>	T <sub>A</sub> =0°C to 70°C			1.0	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>			1.2	%/%
Load Regulation <sup>2</sup>	10% load to rated load, 5V output types			15	%
	10% load to rated load, all other output types			10	
Ripple and Noise	BW=DC to 20MHz, all output types			150	mV p-p

## ABSOLUTE MAXIMUM RATINGS

Short-circuit protection <sup>3</sup>	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V <sub>IN</sub> , NME24 types	28V
Input voltage V <sub>IN</sub> , NME48 types	54V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating curve.

3. Supply voltage must be disconnected at the end of the short circuit duration.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

[www.murata-ps.com/support](http://www.murata-ps.com/support)

### ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso= 500VDC	1			GΩ


### GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All types		100		kHz


### TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	0		70	°C
Storage		-55		150	
Cooling	Free air convection				

### TEMPERATURE DERATING GRAPH

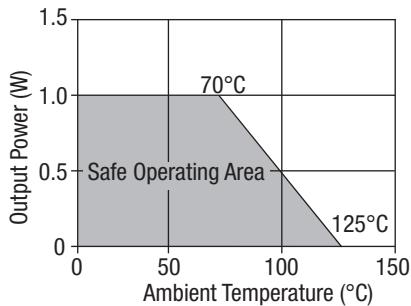

### TOLERANCE ENVELOPE

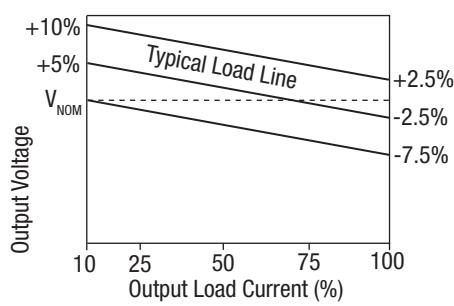

### TECHNICAL NOTES

#### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NME series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NME series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

#### REPEATED HIGH-VOLTAGE ISOLATION TESTING




It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NME series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

**PACKAGE SPECIFICATIONS**

**MECHANICAL DIMENSIONS**




DIP Package



**PIN CONNECTIONS - 8 PIN DIP**

Pin	Function
1	-VIN
4	+VIN
5	+VOUT
7	-VOUT

SIP Package



**PIN CONNECTIONS - 4 PIN SIP**

Pin	Function
1	-VIN
2	+VIN
3	-VOUT
4	+VOUT

\* 0.303 (7.70) for 48V variants

\*\* 0.3 (7.50) for 48V variants


All dimensions in inches  $\pm 0.01$  (mm  $\pm 0.25$ mm). All pins on a 0.1 (2.54) pitch and within  $\pm 0.01$  (0.25) of true position.

Weight: 1.48g (DIP) 1.30g (SIP)


### PACKAGE SPECIFICATIONS (continued)

#### RECOMMENDED FOOTPRINT DETAILS

8 Pin DIP Package

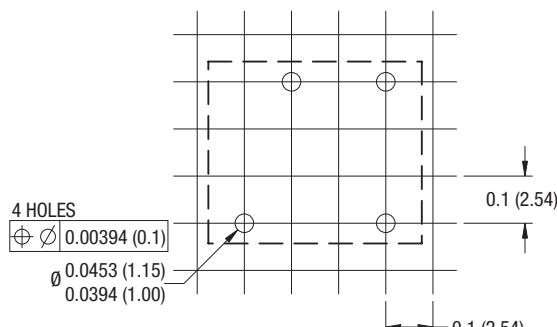


4 Pin SIP Package

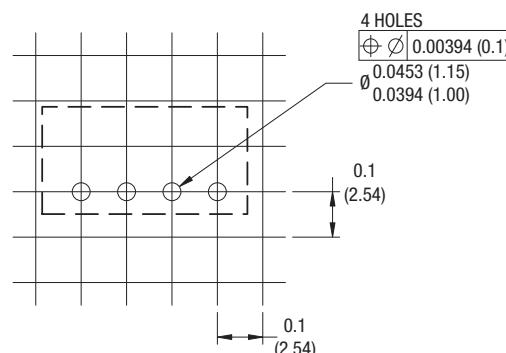


#### TUBE OUTLINE DIMENSIONS

8 Pin DIP Tube

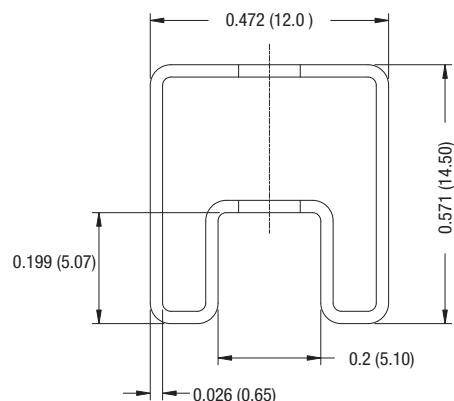

4 Pin SIP Tube

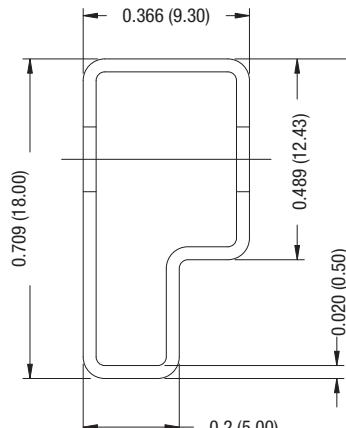

Unless otherwise stated all dimensions in inches (mm)  $\pm 0.5\text{mm}$ .  
 Tube length (8 Pin DIP) : 20.47 (520mm  $\pm 2\text{mm}$ ).  
 Tube length (4 Pin SIP) : 20.47 (520mm  $\pm 2\text{mm}$ ).

Tube Quantity : 35

#### RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 ISO 9001 and 14001 REGISTERED



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#): Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2013 Murata Power Solutions, Inc.

[www.murata-ps.com/support](http://www.murata-ps.com/support)

KDC\_NME2.E02 Page 4 of 4

## Murata Power Solutions社(MPS社)製品の取り扱い上の注意

1. 製品の運搬時、電子部品等に力を加えたり、力が加わる様な作業をしないで下さい。
2. 以下のような環境条件では絶縁劣化を引き起こす危険性がありますので、設置及び保管しないでください。
  - ・ 本仕様書の規格外の高温、高湿の保存や直射日光の当たるところ。
  - ・ 腐食性ガス雰囲気(Cl<sub>2</sub>、H<sub>2</sub>S、NH<sub>3</sub>、SO<sub>2</sub>、NO<sub>x</sub>等)。
  - ・ 水、油、有機溶剤等の液体がかかるところ。
  - ・ 塵埃の多いところ。
  - ・ その他、上記に準ずるところ。
3. 低分子シロキサン(ジメチルポリシロキサン)含有率の高いシリコンゴム、シリコンボンド等の使用により、ボリウムやポテンショメータ摺動子やスイッチ類の接点の接触不良が発生する場合があります。低分子シロキサン含有率は0.1%以下のものをご使用ください。
4. 製品に使用されている個々の部品は、周囲温度により、その信頼性と寿命(MTBF)は極端に短くなります。当データシートに定められている温度条件の範囲内で使用してください。

### お願い

1. 本データシートは特に規定しない限り、電源単体での品質を規定するものです。ご使用に際しては御社製品に実装された状態で必ず評価、確認をして下さい。
2. 当製品に万が一異常や不具合が生じた場合でも、2次災害防止の為に、完成品に適切なフェールセーフ機能を必ず付加して下さい。
3. 当データシートに記載の製品について、その故障や誤動作が人命又は財産に危害を及ぼす恐れがある等の理由により、高信頼性が要求される以下の用途でのご使用をご検討の場合、又は、当データシートに記載された用途以外でのご使用をご検討の場合は、必ず事前に弊社営業部又は最寄りの営業所までご連絡下さい。  
①航空機器 ②宇宙機器 ③海底機器 ④発電所制御機器 ⑤防災/防犯機器 ⑥交通用信号機器  
⑦輸送機器(自動車、列車、船舶等) ⑧医療機器 ⑨情報処理機器 ⑩その他上記機器と同等の機器
4. 記載内容について、改良のため予告なく変更することや、供給を停止することがございますので、ご注文に際してはご確認下さい。記載内容にご不明の点がございましたら、弊社営業部までお問い合わせ下さい。
5. 製品によっては、お守りいただかないと発煙、発火等に至る可能性のある定格や注意(保管・使用環境、定格上の注意、実装上の注意、取扱上の注意)を記載しておりますので、必ずご覧下さい。
6. 当データシートに記載の製品の使用もしくは当データシートに記載の情報の使用に際して、当社もしくは第三者の知的財産権その他の権利にかかる問題が発生した場合は、当社はその責を負うものではありません。また、これらの権利の実施権の許諾を行うものではありません。
7. 当データシートの製品が、「外国為替及び外国貿易法」に定める規制貨物等に該当するものについては、輸出する場合、同法に基づく輸出許可が必要です。
8. MPS社の製造工程では、モントリオール議定書で規制されているオゾン層破壊物質(ODS)は一切使用しておりません。