

#### Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <a href="http://www.nxp.com">http://www.nxp.com</a>, <a href="http://www.semiconductors.philips.com/">http://www.nxp.com</a>, <a href="http://www.nexperia.com">http://www.nexperia.com</a>, <a href="http://www.nexperia.com">http://www.nexperia.com</a>)

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use salesaddresses@nexperia.com (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

# PH3330L

# N-channel TrenchMOS logic level FET

Rev. 02 — 22 October 2008

**Product data sheet** 

# 1. Product profile

## 1.1 General description

Logic level N-channel enhancement mode Field-Effect Transistor (FET) in a plastic package using TrenchMOS technology. This product is designed and qualified for use in computing, communications, consumer and industrial applications only.

#### 1.2 Features and benefits

- High efficiency due to low switching and conduction losses
- Suitable for logic level gate drive sources

## 1.3 Applications

- DC-to-DC converters
- Notebook computers

- Switched-mode power supplies
- Voltage regulators

#### 1.4 Quick reference data

Table 1. Quick reference

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$V_{DS}$	drain-source voltage	$T_j \ge 25 \text{ °C}; T_j \le 150 \text{ °C}$	-	-	30	V
I <sub>D</sub>	drain current	$T_{mb} = 25 ^{\circ}\text{C}; V_{GS} = 10 \text{V};$ see <u>Figure 1</u> ; see <u>Figure 3</u>	-	-	100	Α
P <sub>tot</sub>	total power dissipation	T <sub>mb</sub> = 25 °C; see <u>Figure 2</u>	-	-	62.5	W
Dynamic	characteristics					
$Q_{GD}$	gate-drain charge	$V_{GS} = 4.5 \text{ V}; I_D = 25 \text{ A};$ $V_{DS} = 12 \text{ V}; \text{ see } \frac{\text{Figure 12}}{\text{Figure 13}};$	-	6.9	-	nC
Static ch	aracteristics					
R <sub>DSon</sub>	drain-source on-state resistance	$V_{GS} = 10 \text{ V}; I_D = 25 \text{ A};$ $T_j = 25 \text{ °C}; \text{ see } \frac{\text{Figure 10}}{\text{11}};$ see $\frac{\text{Figure 11}}{\text{12}}$	-	2.3	3.3	mΩ



2 of 13

# **Pinning information**

**Pinning information** Table 2.

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	S	source		_
2	S	source	mb	D
3	S	source		$G \longrightarrow \overline{A}$
4	G	gate	Qj	
mb	D	mounting base; connected to drain	1 2 3 4	mbb076 S
			SOT669 (LFPAK)	

#### **Ordering information** 3.

Table 3. **Ordering information** 

Type number	Package		
	Name	Description	Version
PH3330L	LFPAK	plastic single-ended surface-mounted package (LFPAK); 4 leads	SOT669


# **Limiting values**

Table 4. **Limiting values** 

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{DS}$	drain-source voltage	T <sub>j</sub> ≥ 25 °C; T <sub>j</sub> ≤ 150 °C	-	30	V
$V_{DGR}$	drain-gate voltage	$T_j \ge 25 \text{ °C}; T_j \le 150 \text{ °C}; R_{GS} = 20 \text{ k}\Omega$	-	30	V
$V_{GS}$	gate-source voltage		-20	20	V
I <sub>D</sub>	drain current	V <sub>GS</sub> = 10 V; T <sub>mb</sub> = 25 °C; see <u>Figure 1</u> ; see <u>Figure 3</u>	-	100	Α
		V <sub>GS</sub> = 10 V; T <sub>mb</sub> = 100 °C; see <u>Figure 1</u>	-	54.2	Α
I <sub>DM</sub>	peak drain current	$t_p \le 10 \mu s$ ; pulsed; $T_{mb} = 25 \text{ °C}$ ; see Figure 3	-	300	Α
P <sub>tot</sub>	total power dissipation	T <sub>mb</sub> = 25 °C; see <u>Figure 2</u>	-	62.5	W
T <sub>stg</sub>	storage temperature		-55	150	°C
Tj	junction temperature		-55	150	°C
Source-dr	ain diode				
Is	source current	T <sub>mb</sub> = 25 °C	-	52	Α
I <sub>SM</sub>	peak source current	$t_p \le 10 \ \mu s$ ; pulsed; $T_{mb} = 25 \ ^{\circ}C$	-	208	Α
Avalanche	ruggedness				
E <sub>DS(AL)S</sub>	non-repetitive drain-source avalanche energy	$V_{GS}$ = 10 V; $T_{j(init)}$ = 25 °C; $I_D$ = 70 A; $V_{sup}$ ≤ 30 V; $t_p$ = 0.15 ms; $R_{GS}$ = 50 $\Omega$ ; unclamped	-	245	mJ

### N-channel TrenchMOS logic level FET

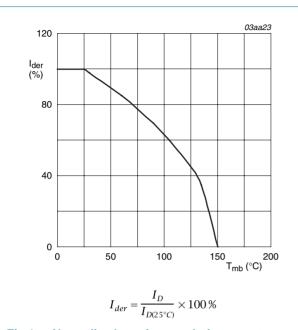

Normalized continuous drain current as a function of mounting base temperature

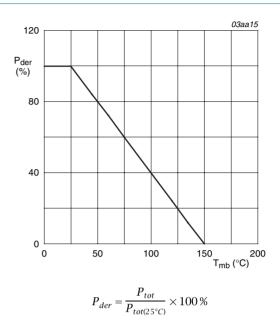


Fig 2. Normalized total power dissipation as a function of mounting base temperature

3 of 13

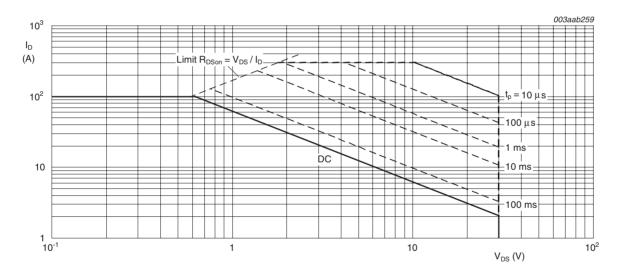


Fig 3. Safe operating area; continuous and peak drain currents as a function of drain-source voltage

 $T_{mb} = 25 \,^{\circ}C; I_{DM}$  is single pulse


### N-channel TrenchMOS logic level FET

4 of 13

#### 5. Thermal characteristics

Thermal characteristics Table 5.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$R_{th(j-mb)}$	thermal resistance from junction to mounting base	see Figure 4	-	-	2	K/W

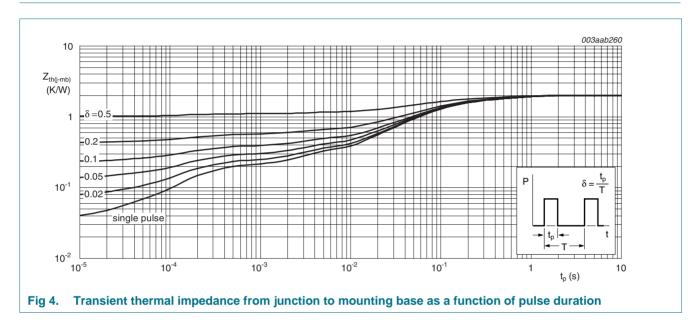

# N-channel TrenchMOS logic level FET

5 of 13

# **Characteristics**

Table 6. Characteristics

Table 6.	Characteristics					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static cha	racteristics					
V <sub>(BR)DSS</sub>	drain-source	$I_D = 250 \mu A; V_{GS} = 0 V; T_j = 25 °C$	30	-	-	V
	breakdown voltage	$I_D = 250 \ \mu A; \ V_{GS} = 0 \ V; \ T_j = -55 \ ^{\circ}C$	27	-	-	V
V <sub>GS(th)</sub>	gate-source threshold voltage	$I_D = 1 \text{ mA}$ ; $V_{DS} = V_{GS}$ ; $T_j = 25 \text{ °C}$ ; see Figure 8; see Figure 9	1.3	1.7	2.15	V
		$I_D = 1 \text{ mA}$ ; $V_{DS} = V_{GS}$ ; $T_j = 150 \text{ °C}$ ; see <u>Figure 8</u> ; see <u>Figure 9</u>	8.0	-	-	V
		$I_D = 1$ mA; $V_{DS} = V_{GS}$ ; $T_j = -55$ °C; see Figure 8; see Figure 9	-	-	2.6	V
$I_{DSS}$	drain leakage current	$V_{DS} = 30 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	1	μΑ
		$V_{DS} = 30 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 150 ^{\circ}\text{C}$	-	-	100	μΑ
$I_{GSS}$	gate leakage current	$V_{GS} = 16 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nΑ
		$V_{GS} = -16 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nΑ
$R_{DSon}$	drain-source on-state resistance	$V_{GS}$ = 10 V; $I_D$ = 25 A; $T_j$ = 25 °C; see Figure 10; see Figure 11	-	2.3	3.3	mΩ
		$V_{GS} = 10 \text{ V}; I_D = 25 \text{ A}; T_j = 150 ^{\circ}\text{C}; \text{ see}$ Figure 11; see Figure 10	-	4.1	6	mΩ
		$V_{GS} = 4.5 \text{ V}; I_D = 25 \text{ A}; T_j = 25 ^{\circ}\text{C}; \text{ see}$ Figure 10; see Figure 11	-	3.4	4.5	mΩ
$R_G$	gate resistance	f = 1 MHz	-	0.7	-	Ω
Dynamic	characteristics					
Q <sub>G(tot)</sub> total gate charge		$I_D = 25 \text{ A}$ ; $V_{DS} = 12 \text{ V}$ ; $V_{GS} = 4.5 \text{ V}$ ; see Figure 12; see Figure 13	-	30.5	-	nC
		$I_D = 0 \text{ A}; V_{DS} = 0 \text{ V}; V_{GS} = 4.5 \text{ V}$	-	28.5	-	nC
Q <sub>GS</sub>	gate-source charge	$I_D = 25 \text{ A}; V_{DS} = 12 \text{ V}; V_{GS} = 4.5 \text{ V}; \text{ see}$	-	15.4	-	nC
Q <sub>GS1</sub>	pre-threshold gate-source charge	Figure 12; see Figure 13	-	7.7	-	nC
Q <sub>GS2</sub>	post-threshold gate-source charge		-	7.7	-	nC
$Q_{GD}$	gate-drain charge		-	6.9	-	nC
$V_{GS(pl)}$	gate-source plateau voltage	$I_D$ = 25 A; $V_{DS}$ = 12 V; see <u>Figure 12</u> ; see <u>Figure 13</u>	-	3.4	-	V
C <sub>iss</sub>	input capacitance	$V_{DS} = 12 \text{ V}; V_{GS} = 0 \text{ V}; f = 1 \text{ MHz};$ $T_j = 25 \text{ °C}; \text{ see } \frac{\text{Figure } 14}{\text{Figure } 14}$	-	4840	-	pF
		$V_{DS} = 0 \text{ V}; V_{GS} = 0 \text{ V}; f = 1 \text{ MHz};$ $T_j = 25 \text{ °C}$	-	5380	-	pF
C <sub>oss</sub>	output capacitance	V <sub>DS</sub> = 12 V; V <sub>GS</sub> = 0 V; f = 1 MHz;	-	960	-	pF
C <sub>rss</sub>	reverse transfer capacitance	T <sub>j</sub> = 25 °C; see <u>Figure 14</u>	-	410	-	pF

# N-channel TrenchMOS logic level FET

6 of 13

Table 6. Characteristics ...continued

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$t_{d(on)}$	turn-on delay time	$V_{DS}$ = 12 V; $R_L$ = 0.5 $\Omega$ ; $V_{GS}$ = 4.5 V;	-	41	-	ns
t <sub>r</sub>	rise time	$R_{G(ext)} = 5.6 \Omega$	-	75	-	ns
t <sub>d(off)</sub>	turn-off delay time		-	52	-	ns
t <sub>f</sub>	fall time		-	27	-	ns
Source-d	rain diode					
$V_{SD}$	source-drain voltage	$I_S = 25 \text{ A}$ ; $V_{GS} = 0 \text{ V}$ ; $T_j = 25 \text{ °C}$ ; see Figure 15	-	0.82	1.2	V
t <sub>rr</sub>	reverse recovery time	$I_S = 20 \text{ A}$ ; $dI_S/dt = -100 \text{ A/s}$ ; $V_{GS} = 0 \text{ V}$ ;	-	52	-	ns
Q <sub>r</sub>	recovered charge	$V_{DS} = 25 \text{ V}$	-	23	-	nC

## N-channel TrenchMOS logic level FET

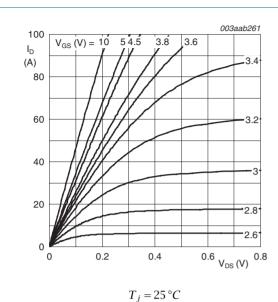


Fig 5. Output characteristics: drain current as a function of drain-source voltage; typical values

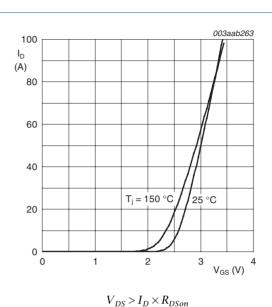


Fig 6. Transfer characteristics: drain current as a function of gate-source voltage; typical values


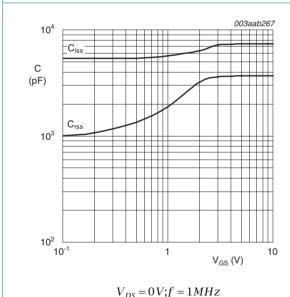


Fig 7. Input and reverse transfer capacitances as a function of gate-source voltage; typical values

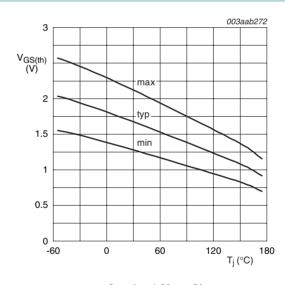


 $I_D = 1 \, mA; V_{DS} = V_{GS}$ 

Fig 8. Gate-source threshold voltage as a function of junction temperature

7 of 13

### N-channel TrenchMOS logic level FET

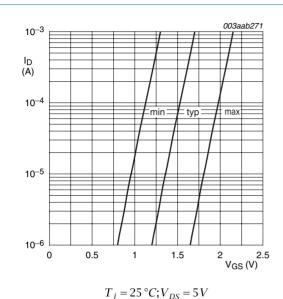

Sub-threshold drain current as a function of Fig 9. gate-source voltage

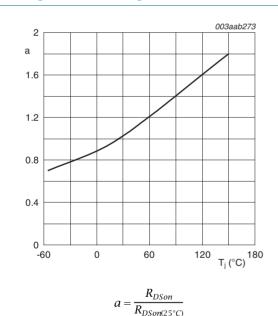


Fig 11. Normalized drain-source on-state resistance factor as a function of junction temperature

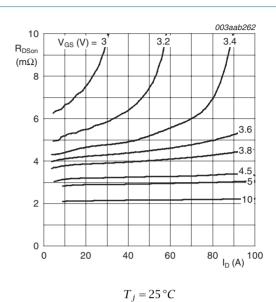


Fig 10. Drain-source on-state resistance as a function of drain current; typical values

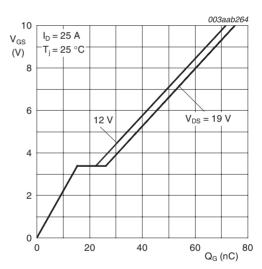


Fig 12. Gate-source voltage as a function of gate charge; typical values

8 of 13

### N-channel TrenchMOS logic level FET






Fig 13. Gate charge waveform definitions

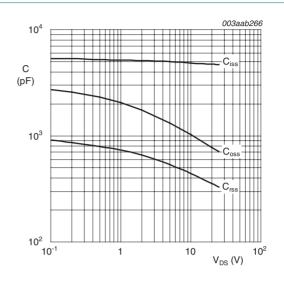

 $V_{GS} = 0V; f = 1MHz$ 

Fig 14. Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values

9 of 13

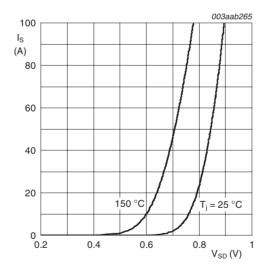


 $V_{GS} = 0V$ 

Fig 15. Source current as a function of source-drain voltage; typical values

# Package outline

### Plastic single-ended surface-mounted package (LFPAK); 4 leads

**SOT669** 

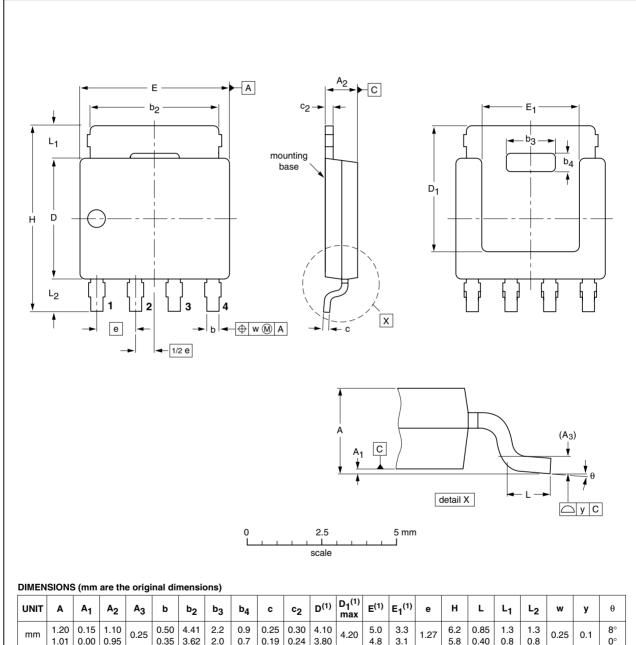

UNIT	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	b	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	С	c <sub>2</sub>	D <sup>(1)</sup>	D <sub>1</sub> <sup>(1)</sup> max	E <sup>(1)</sup>	E <sub>1</sub> <sup>(1)</sup>	е	Н	L	L <sub>1</sub>	L <sub>2</sub>	w	у	θ
mm	1.20 1.01	0.15 0.00	1.10 0.95	0.25	0.50 0.35	4.41 3.62	2.2 2.0	0.9 0.7	0.25 0.19	0.30 0.24	4.10 3.80	4.20	5.0 4.8	3.3 3.1	1.27	6.2 5.8	0.85 0.40	1.3 0.8	1.3 0.8	0.25	0.1	8° 0°

#### Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE		
VERSION	IEC	JEDEC	JEITA	PROJECTION	ISSUE DATE	
SOT669		MO-235			<del>04-10-13</del> 06-03-16	

Fig 16. Package outline SOT669 (LFPAK)

© NXP B.V. 2008. All rights reserved.

# N-channel TrenchMOS logic level FET

11 of 13

# **Revision history**

#### Table 7. **Revision history**

Document ID	Release date	Data sheet status	Change notice	Supersedes		
PH3330L_2	20081022	Product data sheet	-	PH3330L_1		
Modifications:  • The format of this data sheet has been redesigned to comply with the new ide guidelines of NXP Semiconductors.						
	<ul> <li>Legal text</li> </ul>	s have been adapted to th	ne new company name v	vhere appropriate.		
PH3330L_1	20060201	Product data sheet	-	-		

#### N-channel TrenchMOS logic level FET

## Legal information

#### 9.1 Data sheet status

Document status [1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- The term 'short data sheet' is explained in section "Definitions"
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product [3] status information is available on the Internet at URL http://www.nxp.com.

#### **Definitions** 9.2

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

#### 9.3 **Disclaimers**

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

#### **Trademarks** 9.4

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

12 of 13

TrenchMOS — is a trademark of NXP B.V.

### 10. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

PH3330L 2 © NXP B.V. 2008. All rights reserved. Rev. 02 — 22 October 2008

NXP Semiconductors PH3330L

## N-channel TrenchMOS logic level FET

# 11. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
1.4	Quick reference data	1
2	Pinning information	2
3	Ordering information	2
4	Limiting values	2
5	Thermal characteristics	4
6	Characteristics	5
7	Package outline	10
8	Revision history	11
9	Legal information	12
9.1	Data sheet status	12
9.2	Definitions	12
9.3	Disclaimers	12
9.4	Trademarks	12
10	Contact information	12

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2008.

All rights reserved.

**⊗ NAF D.V. 2000.** 

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 22 October 2008

Document identifier: PH3330L\_2

