

**AUTOMOTIVE 2-BITS BI-DIRECTIONAL LEVEL TRANSLATOR
 OPEN-DRAIN AND PUSH-PULL APPLICATIONS**

Description

The LSF0102Q is an automotive compliant 2-channel bi-directional multi-voltage level translator for open-drain and push-pull applications. This device is a universal level translator that A port operates from 0.65V to 4.5V (Vref_A) and B port 1.8V to 5.5V (Vref_B). This range allows for bi-directional voltage translations between 0.65V and 5.0V. Be aware that Vref_B is recommended to be at 1.0V higher than Vref_A for best signal integrity.

The EN pin is used to activate the device. When EN is HIGH, the translator switch is on. Otherwise, EN is LOW, the translator switch is off, and a high-impedance state exists between ports. The EN input circuit is designed to be supplied by Vref_B via an external Rpu (pullup resistor, typ 200kΩ) and the EN must be LOW during power-up or power-down to avoid miss operation.

Be aware that external Rpu is required on each signal in both A and B ports for push-pull application because a pull-high state can avoid miss operation during power-up or power-down. As same as open-drain application, the smaller Rpu results in the larger driving current. For bi-directional signal flows, there is no need for a direction pin to minimize system effort. This device supports 5V tolerant I/O pins in a variety of applications which require different voltage translation levels.


Features

- AEC-Q100 Grade 1, Specified from -40°C to +125°C
- External Rpu (Pullup Resistor) Sets Driving Current in Both Push-Pull and Open-Drain Applications
- Maximum Data Rate is Dominated by the System Capacitance and Pullup Resistors
 - ≤ 100MHz; CL = 15pF, 30pF, RPU ≤ 300Ω
 - ≤ 50MHz; CL = 50pF, RPU ≤ 300Ω
- Bi-directional Voltage Level Translation Between:
 - 0.65V and 1.5V, 1.8V, 2.5V, 3.3V and 5.0V
 - 1.2V and 1.8V, 2.5V, 3.3V and 5.0V
 - 1.8V and 2.5V, 3.3V and 5.0V
 - 2.5V and 3.3V and 5.0V
 - 3.3V and 5.0V
- ESD Protection Exceeds JESD 22
 - 4000V HBM (A114)
 - 1500V CDM (C101)
- Latch-Up Exceeds 100mA per JESD 17
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **The LSF0102Q is suitable for automotive applications requiring specific change control; this part is AEC-Q100 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.**

<https://www.diodes.com/quality/product-definitions/>

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
 2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Pin Assignments

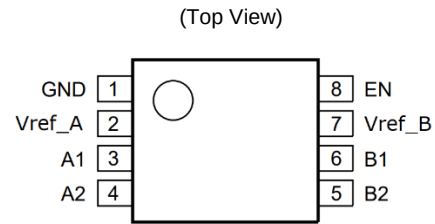

VSSOP-8

Applications

- GPIO, MDIO, SDIO, SVID, UART
- PMBus, SMBus, I2C, and other interfaces
- Infotainment head units
- ADAS computer visions
- Vehicle high-performance computing
- EV and HEV battery management systems

Pin Descriptions

Pin Number	Pin Name	Function
1	GND	Ground
2	Vref_A	Reference supply voltage; A port
3	A1	Input/output
4	A2	Input/output
5	B2	Input/output
6	B1	Input/output
7	Vref_B	Reference supply voltage; B port
8	EN	Enable input (active HIGH)

Absolute Maximum Ratings (Note 4)


Symbol	Parameter	Rating	Unit
ESD HBM	Human Body Model ESD Protection	±4	kV
ESD CDM	Charged Device Model ESD Protection	±1.5	kV
VREF	Supply Reference Voltage Range	-0.5 to +6.0	V
VI	Input Voltage Range	-0.5 to +6.0	V
VO	Voltage Range Applied to Any Output in the High-Z or Power-Off State	-0.5 to +6.0	V
ICH	Continuous Channel Current	128	mA
IIK	Input Clamp Current, VI < 0	-50	mA
TJ	Operating Junction Temperature	-40 to +150	°C
TSTG	Storage Temperature	-65 to +150	°C

Note: 4. Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability.

Functional Diagram

NOTE: See load circuit.

EN pin is shorted to Vref_B with an external pull up resistor for gate bias voltage.
Recommend: 200 kΩ

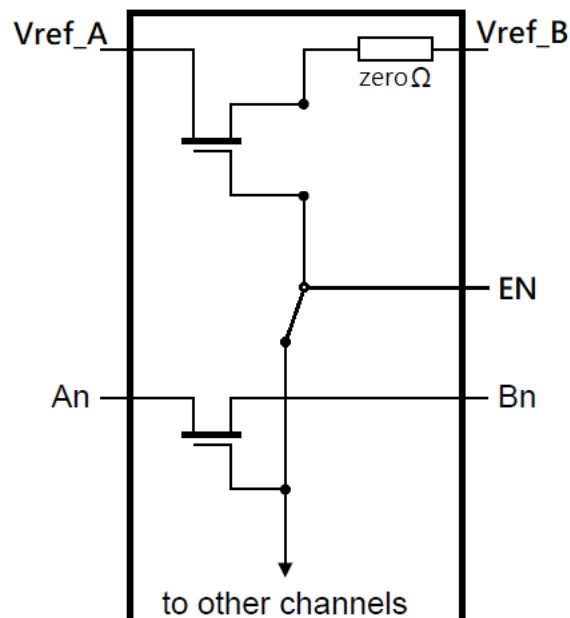

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
Vref_A	Reference Voltage, A Port	0.65	4.5	V
Vref_B	Reference Voltage, B Port, when Vref_A >= 1V	Vref_A + 0.6	5.5	V
	Reference Voltage, B Port, when Vref_A < 1V	Vref_A + 0.8	5.5	V
V _{I/O}	Input/Output Voltage	0	5.5	V
V _{EN}	Enable Voltage when Vref_A >= 1V	Vref_A + 0.6	5.5	V
	Enable Voltage when Vref_A < 1V	Vref_A + 0.8	5.5	V
I _{PASS}	Pass Transistor Current	—	64	mA
T _A	Operating Free-Air Temperature	-40	+125	°C

Electrical Characteristics (All typical values are measured at T_A = +25 °C, unless otherwise specified.)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit	
Vref_A	A Port Supply Voltage	What if config to be low-voltage side	0.65	—	4.5	V	
Vref_B	B Port Supply Voltage	What if config to be high-voltage side	1.8	—	5.5	V	
V _{IK}	Input Clamping Voltage	I _I = -18mA, V _{EN} = 0	-1.2	—	—	V	
I _L	Leakage Current	Pins An, Bn, Vref_A, Vref_B and EN; V _I = GND to 5.0V	—	1.0	5.0	μA	
I _{CC}	Supply Current	Vref_B = EN = 5.5V, Vref_A = 4.5V, I _O = 0, V _I = 0 or V _{CC}	—	6	—	μA	
C _{IO(off)}	I/O Pin Off-State Capacitance	V _O = 3V or 0, EN = 0	—	5	6	pF	
C _{IO(on)}	I/O Pin On-State Capacitance	V _O = 3V or 0, EN = 3V	—	10	13	pF	
C _{I(Vref_A/B/EN)}	Reference Voltage Pin and Enable Pin Input Capacitance	V _O = 3V or 0	—	10	—	pF	
V _{IL} (EN)	Device Turn-Off Threshold of EN Pin	—	—	—	Vref_A	V	
V _{IH} (EN)	Device Turn-On Threshold of EN Pin	When Vref_A >= 1V. See load circuit.	Vref_A + 0.6	—	5.5	V	
		When Vref_A < 1V. See load circuit.	Vref_A + 0.8	—	5.5	V	
R _{on}	On-State Resistance (Note 5)	V _I = 0, I _O = 64mA	Vref_A = 3.3V; Vref_B = EN = 5V	—	5	—	Ω
			Vref_A = 1.8V; Vref_B = EN = 5V	—	6	—	
			Vref_A = 1.0V; Vref_B = EN = 5V	—	9	—	
		V _I = 0, I _O = 32mA	Vref_A = 1.8V; Vref_B = EN = 5V	—	8	—	Ω
			Vref_A = 2.5V; Vref_B = EN = 5V	—	6	—	
		V _I = 1.8V, I _O = 15mA, Vref_A = 3.3V; Vref_B = EN = 5V		—	8	—	Ω
		V _I = 1.0V, I _O = 10mA, Vref_A = 1.8V; Vref_B = EN = 3.3V		—	14	—	Ω
		V _I = 0, I _O = 10mA, Vref_A = 1.0V; Vref_B = EN = 3.3V		—	10	—	Ω
		V _I = 0, I _O = 10mA, Vref_A = 1.0V; Vref_B = EN = 1.8V		—	12	—	Ω
		V _I = 0, I _O = 10mA, Vref_A = 0.65V; Vref_B = EN = 1.5V		—	15	—	Ω

Note: 5. Measured by the voltage drop between the A and B pins at the indicated current through the switch. On-state resistance is determined by the lowest voltage of the two (A or B) pins.

Translating Down Switching Characteristics (T_A = +25°C, unless otherwise specified.) (Note 6)

Translating Down, 5.0V to 1.8V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	B	A	0.4	0.3	0.2	ns
t _{PHL}			1.0	0.7	0.5	ns
Test Conditions: V _{ref_A} = 1.8V, V _{PU} = V _{IH} = 5.0V, V _M = 2.15V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Down, 3.3V to 1.8V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	B	A	0.4	0.3	0.2	ns
t _{PHL}			1.0	0.7	0.5	ns
Test Conditions: Vref_A = 1.8V, VPU = VIH = 3.3V, VM = 1.15V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Down, 3.3V to 1.2V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	B	A	0.6	0.4	0.2	ns
t _{PHL}			1.1	0.8	0.6	ns
Test Conditions: V _{ref_A} = 1.2V, V _{PU} = V _{IH} = 3.3V, V _M = 0.85V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Down, 1.8V to 1.2V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	B	A	0.8	0.5	0.3	ns
t _{PHL}			1.6	1.4	1.1	ns
Test Conditions: Vref_A = 1.2V, VPU = VIH = 1.8V, VM = 0.65V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Down, 1.8V to 0.8V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	B	A	0.8	0.5	0.3	ns
t _{PHL}			1.6	1.2	1.0	ns
Test Conditions: V _{ref_A} = 0.8V, V _{PU} = V _{IH} = 1.8V, V _M = 0.55V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Down, 1.5V to 0.65V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	B	A	1.0	0.6	0.4	ns
t _{PHL}			1.9	1.5	1.1	ns
Test Conditions: Vref_A = 0.65V, VPU = VIH = 1.5V, VM = 0.4V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Note: 6. All typical values are measured at T_A = +25°C. Logic levels: V_{OL} and V_{OH} are typical output voltage levels that occur with the output load. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10MHz; Z_O = 50Ω. Definitions test circuit: C_L = load capacitance including jig and probe capacitance; R_L = load resistance = 300Ω; R_{PU} = ext. pullup resistance = 200kΩ.

Translating Up Switching Characteristics (T_A = +25°C, unless otherwise specified.) (Note 6)

Translating Up, 1.8V to 5.0V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	A	B	0.4	0.3	0.3	ns
t _{PHL}			1.9	1.4	1.0	ns
Test Conditions: V _{IH} = Vref_A = 1.8V, V _{EXT} = V _{PU} = 5.0V, R _L = 300Ω, V _M = 2.05V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Up, 1.8V to 3.3V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	A	B	0.4	0.3	0.3	ns
t _{PHL}			1.9	1.4	1.0	ns
Test Conditions: V _{IH} = V _{ref_A} = 1.8V, V _{EXT} = V _{PU} = 3.3V, R _L = 300Ω, V _M = 0.9V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Up, 1.2V to 3.3V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	A	B	0.4	0.3	0.2	ns
t _{PHL}			3.2	2.4	1.6	ns
Test Conditions: V _{IH} = V _{ref_A} = 1.2V, V _{EXT} = V _{PU} = 3.3V, R _L = 300Ω, V _M = 0.75V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Up, 1.2V to 1.8V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	A	B	0.6	0.3	0.2	ns
t _{PHL}			2.8	2.2	1.6	ns
Test Conditions: V _{IH} = V _{ref_A} = 1.2V, V _{EXT} = V _{PU} = 1.8V, R _L = 300Ω, V _M = 0.6V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Up, 0.8V to 1.8V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	A	B	0.6	0.3	0.2	ns
t _{PHL}			3.7	2.9	2.1	ns
Test Conditions: V _{IH} = V _{ref_A} = 0.8V, V _{EXT} = V _{PU} = 1.8V, R _L = 300Ω, V _M = 0.55V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Translating Up, 0.65V to 1.5V

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _L = 50pF	C _L = 30pF	C _L = 15pF	UNIT
			Typ	Typ	Typ	
t _{PLH}	A	B	0.7	0.3	0.2	ns
t _{PHL}			5.0	3.8	2.7	ns
Test Conditions: V _{IH} = Vref_A = 0.65V, V _{EXT} = V _{PU} = 1.8V, R _L = 300Ω, V _M = 0.4V, PRR = 10MHz (unless otherwise noted, see load circuit)						

Note: 6. All typical values are measured at T_A = +25°C. Logic levels: V_{OL} and V_{OH} are typical output voltage levels that occur with the output load. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10MHz; Z_O = 50Ω. Definitions test circuit: C_L = load capacitance including jig and probe capacitance; R_L = load resistance = 300Ω; R_{PU} = ext. pullup resistance = 200kΩ.

Parameter Measurement Information

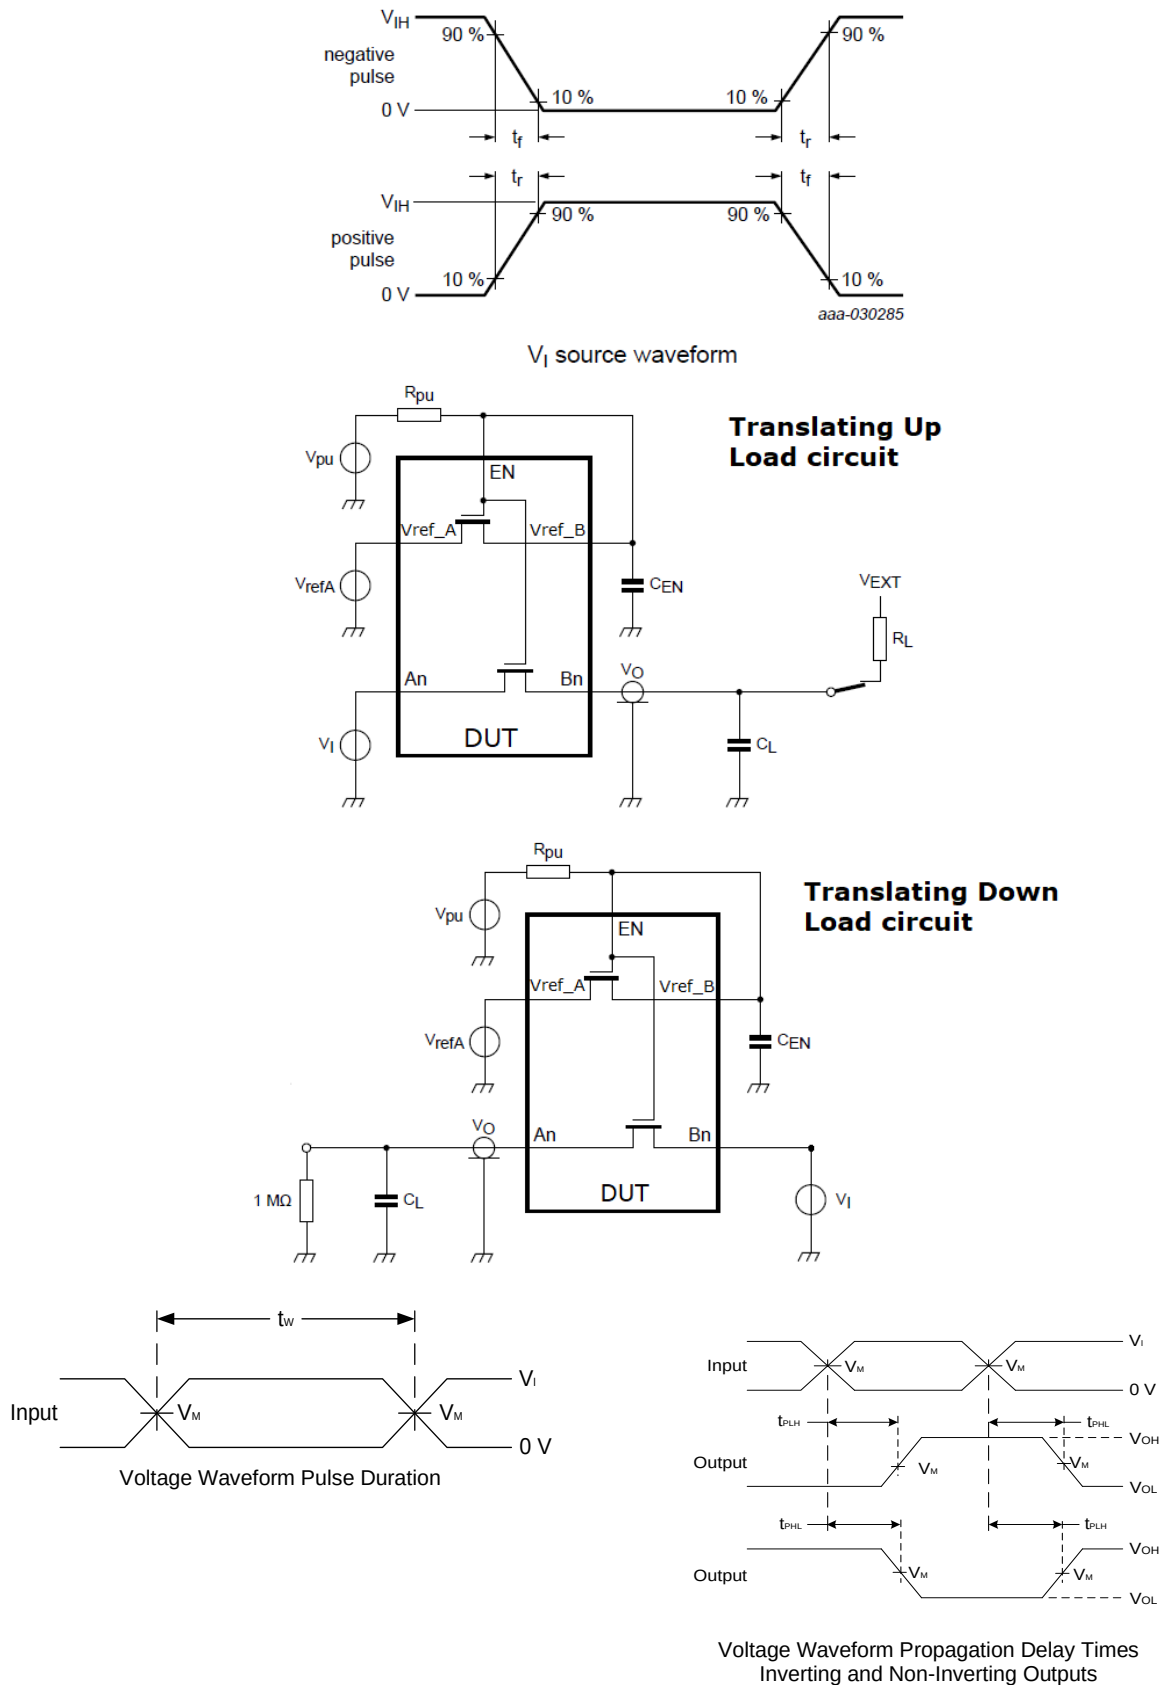


Figure 1. Load Circuit and Voltage Waveforms, $R_{PU} = 200k\Omega$, $C_{EN} = 0.1\mu F$, $R_L = 300\Omega$, $C_L = 15pF, 30pF, 50pF$

Application Circuit Information

I2C or I3C protocol typically occurs in a modern application as shown in Figure 2. For the I2C or I3C voltage translation up or down, consideration should be taken for I3C because it is using higher speeds, which require careful design and attention to signal integrity to ensure reliable communication.

Since I3C uses open-drain mode when necessary for compatibility of I2C, but switches to push-pull outputs whenever possible. The existing I2C devices can be connected to an I3C bus but still have the bus able to switch to a higher data rate for communication at higher speeds between compliant I3C devices. Always refer to the I3C specifications and device datasheets for detailed information and recommendations to ensure reliable communication. Especially at higher speeds, which involve proper PCB layout, termination resistors, and cable selection based on your specific application requirements.

- Standard data rate (SDR): this is the default mode of I3C and operates at 11Mbps or 12.5Mbps.
- High data rate (HDR): this mode of I3C supports speeds up to 25Mbps where it is further enhanced to reach up to 33Mbps.
- Voltage levels: I3C supports a variety of voltage levels including 1.8V, 2.5V, 3.3V, and 5V.
- Output type: I3C utilizes both open-drain and push-pull outputs for SCL, offering flexibility for different voltage level combinations.
- Rise time and fall time: I3C defines minimum rise and fall times for the SCL signal to ensure proper signal integrity at different speeds.
- SCL is a conventional digital clock signal, driven with a push-pull output by the current bus controller during data transfers. When communication with known I3C targets occurs, the bus controller may switch to a higher frequency and/or alter the duty cycle.
- SDA carries the serial data stream, which may be driven by either a controller or target, but is driven at a rate determined by the controller's SCL signal. For compatibility with the I2C protocol, each transaction begins with SDA operating as an open-drain output, which limits the transmission speed. For messages addressed to an I3C target, the SDA driver mode switches to push-pull after the first few bits in the transaction, allowing the clock to be further increased.

Therefore, this presents a challenge with LSF0102Q for I3C because the LSF0102Q relies on a pullup resistor to translate the voltage up from the low-voltage side. The pullup resistor selected shall be not only strong enough to meet the timing requirements, but also not so strong that it violates the V_{IL} requirements of the I3C devices. So, the pullup resistors are needed on both sides for the normal translation setup. This means that the pullup resistors are required to pull the bus voltage on the high-voltage side from V_{PU_1} to V_{PU_2} .

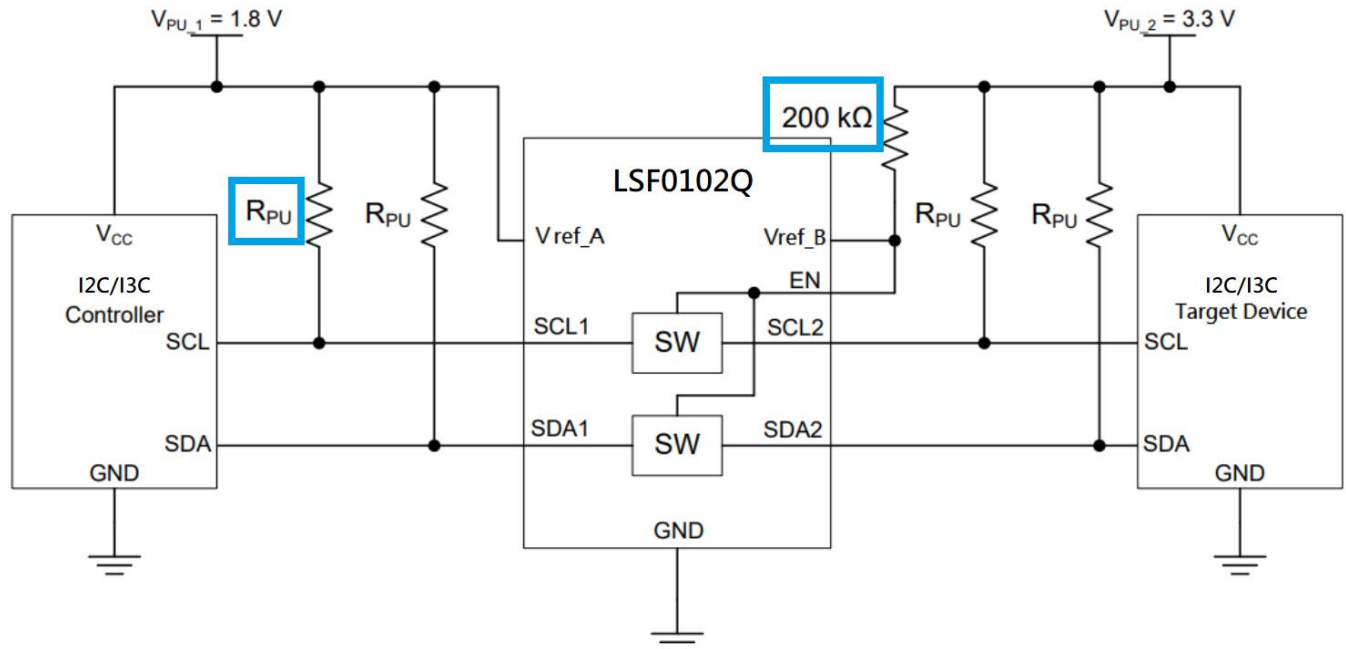



Figure 2. Typical Application Circuit for I2C or I3C Bus Voltage Translation

Package Characteristics

Symbol	Parameter	Package	Test Conditions	Min	Typ	Max	Unit
θ_{JA}	Thermal Resistance Junction-to-Ambient	VSSOP-8	(Note 7)	—	185	—	°C/W
θ_{JC}	Thermal Resistance Junction-to-Case	VSSOP-8	(Note 7)	—	54	—	

Note: 7. Test condition for each of the 3 package types: Device mounted on JEDEC standard PCB per JESD51, with minimum recommended pad layout.

Ordering Information

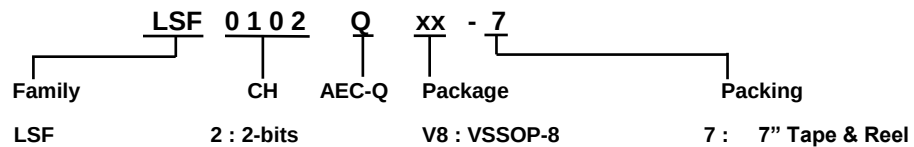


Orderable Part Number	Part Number Suffix	Package Code	Package	Packing (Note 8)	
				Qty.	Carrier
LSF0102QV8-7	-7	V8	VSSOP-8	3000	7" Tape and Reel

Note: 8. The taping orientation is located on our website at <https://www.diodes.com/assets/Packaging-Support-Docs/ap02007.pdf>.

Marking Information

VSSOP-8

(Top View)




Y : Year : 0 to 9
W : Week : A to Z : 1 to 26 week;
a to z : 27 to 52 week; z represents
52 and 53 week
X : Internal Code

Orderable Part Number	Package	Identification Code
LSF0102QV8-7	VSSOP-8	V0102Q

Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

VSSOP-8

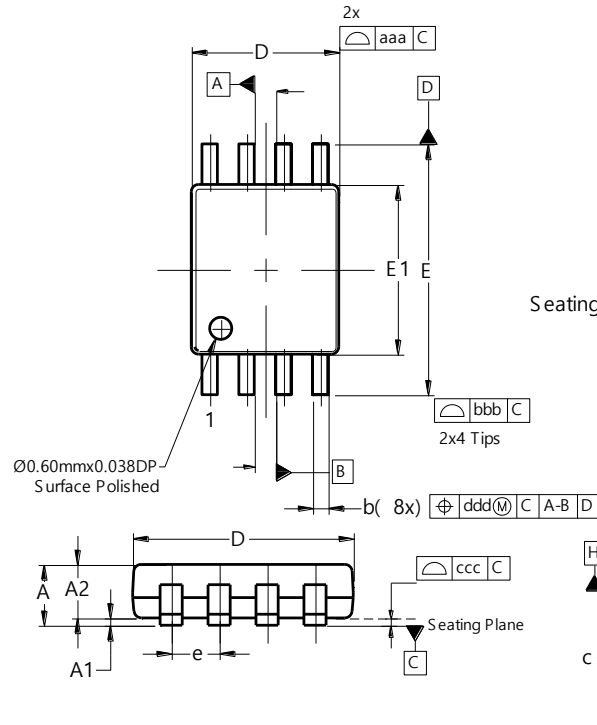


VSSOP-8			
Dim	Min	Max	Typ
A	0.60	0.90	--
A1	--	0.10	--
A2	0.60	0.80	--
b	0.17	0.25	0.21
c	0.08	0.13	--
D	1.90	2.10	2.00
E	3.20	3.60	3.40
E1	2.20	2.40	2.30
e	--	--	0.50
L	0.30	0.40	0.35
L1	0.50	0.60	0.55
a	0°	6°	3°
aaa	0.20		
bbb	0.25		
ccc	0.10		
ddd	0.13		
All Dimensions in mm			

Suggested Pad Layout

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

VSSOP-8

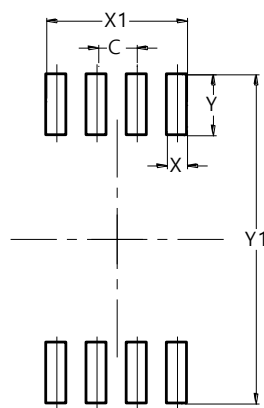

Dimensions	Value (in mm)
C	0.500
X	0.250
X1	1.750
Y	0.750
Y1	4.050

Mechanical Data

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (e3)
- Weight: 0.018 grams (Approximate)
- Max Soldering Temperature +260°C for 30 secs as per JEDEC J-STD-020

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.
All other trademarks are the property of their respective owners.
© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com