

Dimensions

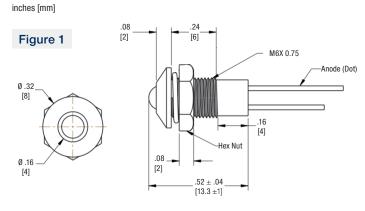


Figure 2


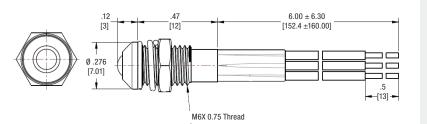


Figure 3



606 Series 6mm Panel Mount Indicators

		Certifications & Ratings		
		 RoHS compliant 		
		Application		


The 606 Series LED Panel Mount Indicators are designed for a variety of applications such as:

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation
 - ... and many more!

Mechanical Information

Mounting Hole Size:	0.244" (6.2 mm)				
Max Panel Thickness:	0.138" (3.5 mm)				
Mounting Torque:	0.362 lbs/ft (5 kg/cm) torque				
Specifications					
Voltage Options:	2 VDC (resistor required) 6 and 12 VDC / bi-color (no resistor required)				
Operating temp:	-25 °C to +85 °C (-13 °F to +185 °F)				
Storage Temp:	-25 °C to +100 °C (-13 °F to +212 °F)				
Electrical Connection:	Through hole and 26 AWG wire leads (bi-color only)				
Housing:	Brass—Chrome Plated				
Terminals:	Copper-Nickel Plated				
Wire Leads:	6" on bi-color only				
Lock washer:	Iron-Nickel Plated				
Nut:	Brass-Nickel Plated				

Figure 4

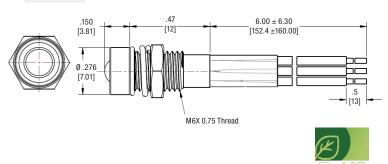

www.dialightsignalsandcomponents.com

Ordering Information >



606-1415-110F

Ordering Information 606 Series

Part Number	Color	Voltage (V DC)	Current (mA)	Typical Intensity* (mcd)	LED Position	Finish	Figure	
606-1111-110F	• Red	2		5	45			
606-1211-110F	• Green		15	70	Protruding		1	
606-1311-110F	Yellow			60				
606-1215-110F	• Green			70			1 w/ Wire Leads	
606-1415-110F	• • Red/Green	3 40/50 6 10 40/50						
606-1415-120F	• • Red/Green		10	40/50			2	
606-1415-130F	• • Red/Green	12		40/50		Chrome		
606-2111-110F	Red		5	45	Recess		3	
606-2211-110F	• Green	2	15	70				
606-2311-110F	Yellow			60				
606-2415-110F	• • Red/Green			40/50				
606-2415-120F	• • Red/Green	6	10	40/50			4	
606-2415-130F	• • Red/Green	12		40/50				

*Bi-color intensity (Red/Green)

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com Warranty Statement: Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.