

# ULTRA MINIATURE SIGNAL RELAY

## 2 POLE - 2A Low Profile Relay


### FTR-B3 Series

RoHS Compliant



#### ■ FEATURES

- DPDT 2c
- Ultra miniature low profile relay with high heat resistant material
- Height: 5.25mm, weight: 0.85g, mounting space: 87mm<sup>2</sup>
- Adopted superior contact spring for high frequency characteristic
- Comply with Telcordia / FCC part 68
  - Isolation distance: min. 1.6mm
  - Dielectric strength between coil and contact: 1,500VAC
  - Surge strength: 2,500V
- Low power: Non-latching: 140mW (230mW at 24V)  
Latching: 100mW (120mW at 24V)
- High reliable bifurcated gold overlay silver contact
- UL, CSA recognized. Conforms to BSI, IEC60950-1
- RoHS compliant
- Plastic sealed

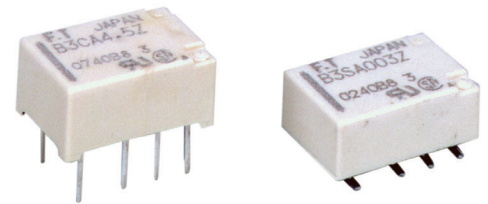

#### ■ APPLICATIONS

xDSL, modems, digital equipment (signal switching), STB (line switching), car navigation system (audio switching)

#### ■ PART NUMBERS

[Example] FTR-B3 G B 4.5 Z - B10  
(a) (b) (c) (d) (e) (f)

|     |                    |   |
|-----|--------------------|---|
| (a) | Relay type         | FTR-B3 series   |
| (b) | Terminal type      | C : Through hole<br>G : Surface mount<br>S : Surface mount, space saving          |
| (c) | Coil type          | A : Standard type (non-latching)<br>B : Latching type (1 coil)                    |
| (d) | Coil rated voltage | 12 : 1.5...24 VDC<br>Please refer to coil rating table                            |
| (e) | Contact material   | Z : Gold overlay silver nickel<br>P : Gold overlay silver palladium               |
| (f) | Packaging          | Nil : Tube packaging<br>B10 : Tape & reel packaging (only for surface mount type) |

Remarks: Actual marking on relay would not carry code FTR and be as below: Ordering code: FTR-B3GB012Z-B10 Actual marking: B3GB012Z

## ■ SPECIFICATIONS

| Item              |                                       | Specifications              |   | Remarks/Conditions                      |   |
|-------------------|---------------------------------------|-----------------------------|---|---|---|
|                   |                                       | Standard type<br>FTR-B3( )A | Latching type<br>FTR-B3( )B                                       |   |   |
| Contact<br>Data   | Configuration                         |                             | 2c (2 Form C)   |   |   |
|                   | Construction                          |                             | Bifurcated contacts   |   |   |
|                   | Material                              |                             | Z: Gold overlay silver nickel<br>P: Gold overlay silver palladium |   |   |
|                   | Resistance (initial)                  |                             | Max. 75 mΩ  |   | At 1A 6VDC                                  |
|                   | Contact rating                        |                             | 1A, 30VDC / 0.3A, 125VAC  |   | Resistive                                   |
|                   | Max. carrying current                 |                             | 2A  |   |   |
|                   | Max. switching voltage                |                             | 250VAC / 220VDC   |   |   |
|                   | Max. switching power                  |                             | 62.5VA / 30W  |   |   |
|                   | Min. switching load *1                |                             | 0.01mA, 10mVDC  |   | Reference                                   |
| Coil              | Rated power                           |                             | 140mW to 230mW  | 100mW to 120mW                          | At 20°C                                     |
|                   | Applied pulse width                   |                             | -   | Min. 10ms                               |   |
|                   | Operate power                         |                             | 80mW to 130mW   | 57mW to 68mW                            | At 20°C                                     |
|                   | Operating temperature rise            |                             | -40 °C to +85 °C  |   | No frost                                    |
|                   | Storage temperature / humidity        |                             | -40 °C to +85 °C / 5% to 85% RH                                   |   | No frost                                    |
| Time              | Operate                               |                             | Max. 3ms  | Max. 3ms (set)                          | At nominal voltage, without bounce          |
|                   | Release                               |                             | Max. 3ms  | Max. 3ms (reset)                        | At nominal voltage, without bounce          |
| Life              | Mechanical                            |                             | Min. 50 x 10 <sup>6</sup><br>operations                           | Min. 20 x 10 <sup>6</sup><br>operations |   |
|                   | Electrical                            | DC load                     | Min. 100 x 10 <sup>3</sup> operations                             |   | At 1A, 30VDC                                |
|                   |                                       | AC load                     | Min. 100 x 10 <sup>3</sup> operations                             |   | At 0.3A, 125VAC                             |
| Insulation        | Insulation resistance (initial)       |                             | Min. 1,000MΩ  |   | At 500VDC                                   |
|                   | Dielectric<br>withstanding<br>voltage | Open contacts               | 1,000VAC (50/60Hz) 1 minute                                       |   |   |
|                   |                                       | Adjacent contacts           | 1,000VAC (50/60Hz) 1 minute                                       |   |   |
|                   |                                       | Contact to coil             | 1,500VAC (50/60Hz) 1 minute                                       |   |   |
|                   | Surge strength                        | Contact to coil             | 2,500V, 2 x 10μs standard wave                                    |   |   |
|                   | Clearance                             | Open contacts               | 0.28mm  |   |   |
|                   |                                       | Adjacent contacts           | 1.0mm   |   |   |
|                   |                                       | Contact to coil             | 1.0mm   |   |   |
|                   | Creepage                              | Open contacts               | 0.28mm  |   |   |
| Adjacent contacts |                                       | 1.0mm                       |   |   |   |
| Contact to coil   |                                       | 1.6mm                       |   |   |   |
| Others            | Vibration<br>resistance               | Misoperation                | 10 to 55 to 10Hz single amplitude 1.65mm                          |   | Coil ON/OFF, 3 axis, total 6 cycles         |
|                   |                                       | Endurance                   | 10 to 55 to 10Hz single amplitude 2.5mm                           |   | Coil OFF, 3 axis, total 6 hours             |
|                   | Shock<br>resistance                   | Misoperation                | 750m/s <sup>2</sup> (11 ±1ms)                                     |   | Coil ON/OFF, 3 axis, total 36<br>operations |
|                   |                                       | Endurance                   | 1,000m/s <sup>2</sup> (6 ±1ms)                                    |   | Coil OFF, 3 axis, total 18<br>operations    |
|                   | Dimensions / Weight                   |                             | 7.2 x 10.6 x 5.25mm / Approx. 0.85g                               |   |   |
|                   | Sealing                               |                             | RT III (plastic sealed)   |   |   |

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL DATA

Standard type

| Coil Code | Rated Coil Voltage (VDC) | Coil Resistance ( $\Omega$ ) $\pm 10\%$ | Must Operate Voltage <sup>*1</sup> (VDC) | Must Release Voltage <sup>*1</sup> (VDC) | Rated Power (mW) |
|-----------|--------------------------|---|--|--|------------------|
| 1.5       | 1.5                      | 16.1                                    | 1.13                                     | 0.15                                     | 140              |
| 003       | 3                        | 64.3                                    | 2.25                                     | 0.3                                      |                  |
| 4.5       | 4.5                      | 145                                     | 3.38                                     | 0.45                                     |                  |
| 006       | 6                        | 257                                     | 4.5                                      | 0.6                                      |                  |
| 009       | 9                        | 579                                     | 6.75                                     | 0.9                                      |                  |
| 012       | 12                       | 1,028                                   | 9.0                                      | 1.2                                      |                  |
| 024       | 24                       | 2,504                                   | 18.0                                     | 2.4                                      | 230              |

Latching type (1 coil)

| Coil Code | Rated Coil Voltage (VDC) | Coil Resistance ( $\Omega$ ) $\pm 10\%$ | Set Voltage <sup>*1</sup> (VDC) | Reset Voltage <sup>*1</sup> (VDC) | Set/Reset Current (mA) | Rated Power (mW) |
|-----------|--------------------------|---|---------------------------------|-----------------------------------|------------------------|------------------|
| 1.5       | 1.5                      | 22.5                                    | +1.13                           | -1.13                             | 50                     | 100              |
| 003       | 3                        | 90                                      | +2.25                           | -2.25                             | 25                     |                  |
| 4.5       | 4.5                      | 203                                     | +3.38                           | -3.38                             | 17                     |                  |
| 006       | 6                        | 360                                     | +4.5                            | -4.5                              | 13                     |                  |
| 009       | 9                        | 810                                     | +6.75                           | -6.75                             | 8                      |                  |
| 012       | 12                       | 1,440                                   | +9.0                            | -9.0                              | 6                      |                  |
| 024       | 24                       | 4,800                                   | +18.0                           | -18.0                             | 4                      | 120              |

Note: All values in the table are valid at 20°C and zero contact.

\*: Specified operate values are valid for pulse wave voltage.

## ■ SAFETY STANDARDS



| Type | Compliance                        | Contact Rating  |
|------|-----------------------------------|---|
| UL   | Flammability: UL 94-V0 (plastics) | 0.5A, 125VAC (resistive)<br>0.3A, 110VDC (General Use)<br>2A, 30VDC (General Use) |
|      | UL508<br>File No.E63615           |   |
| CSA  | C22.2 No.14<br>File No.LR40304-58 |   |

Comply with Telcordia specifications and FCC part 68 and meet BSI, IEC60950-1: Marking only for UL, CSA


## ■ DIMENSIONS

### FTR-B3C - Through hole type


• Dimensions

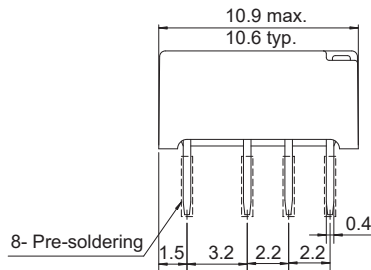

• Schematics\* (BOTTOM VIEW)





• PC board mounting hole layout (BOTTOM VIEW)




### FTR-B3G - Surface mount type


• Dimensions

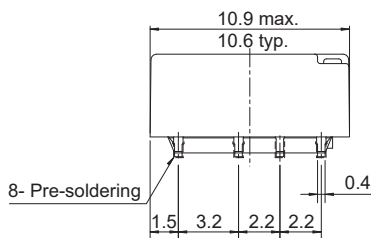

• Schematics\* (TOP VIEW)





• PC board mounting pad layout (TOP VIEW)




### FTR-B3S - Surface mount space saving type


• Dimensions

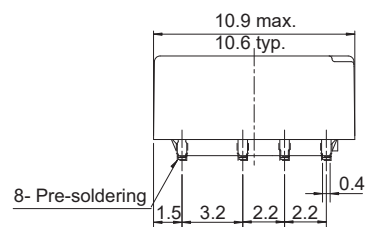

• Schematics\* (TOP VIEW)



• PC board mounting pad layout (TOP VIEW)



\* Contacts indicates reset state for latching relays (FTR-B3CB, FTR-B3GB and FTR-B3SB versions) and non-operate state for standard relays (FTR-B3CA, FTR-B3GA and FTR-B3SA versions).

\* +/- : Apply set voltage for latching relays, operate voltage for standard relays.

(+)(-): Apply reset voltage for latching relays.

Note: Tolerance for PC board mounting hole/pad layout: +/-0.1.

Note: Dimensions of the terminals do not include thickness of pre-soldering.

Unit: mm

( ) : Reference

## ■ COIL POLARITY

|               |   |   |
|---------------|---|---|
| Coil terminal | 1 | 8 |
| Set           | + | - |
| Reset         | - | + |

## ■ PACKAGING SPECIFICATIONS

(1) Packaging method

- Packaging standard: JIS C 0806
- Taping type: TB1612
- Reel type: R16D
- Quantity of 1 reel: 1000 pieces

(2) Reel dimensions

• Packaging orientation code: B

• Tape dimensions

Unit: mm

Note:  
Relays are sold in 1000 pieces per box. Minimum order quantity is 1000 pieces for tube and tape & reel packing.










## ■ PART NUMBER LIST

| Part Number      | Coil Type                  | Terminal Type                  | Contact Material              | Packaging   | Note                          |
|------------------|----------------------------|--------------------------------|-------------------------------|-------------|-------------------------------|
| FTR-B3CA( )Z     | Standard<br>(Non-latching) | Through hole                   | Gold overlay silver nickel    | Tube        | Tape & reel is not applicable |
| FTR-B3CA( )P     |                            |                                | Gold overlay silver palladium |             |                               |
| FTR-B3GA( )Z     |                            | Surface mount                  | Gold overlay silver nickel    | Tube        |                               |
| FTR-B3GA( )Z-B10 |                            |                                |                               | Tape & reel |                               |
| FTR-B3GA( )P     |                            |                                | Gold overlay silver palladium | Tube        |                               |
| FTR-B3GA( )P-B10 |                            |                                | Tape & reel                   |             |                               |
| FTR-B3SA( )Z     |                            | Surface mount,<br>space saving | Gold overlay silver nickel    | Tube        |                               |
| FTR-B3SA( )Z-B10 |                            |                                |                               | Tape & reel |                               |
| FTR-B3SA( )P     |                            |                                | Gold overlay silver palladium | Tube        |                               |
| FTR-B3SA( )P-B10 |                            |                                | Tape & reel                   |             |                               |
| FTR-B3CB( )Z     | Latching<br>(1 coil)       | Through hole                   | Gold overlay silver nickel    | Tube        | Tape & reel is not applicable |
| FTR-B3CB( )P     |                            |                                | Gold overlay silver palladium |             |                               |
| FTR-B3GB( )Z     |                            | Surface mount                  | Gold overlay silver nickel    | Tube        |                               |
| FTR-B3GB( )Z-B10 |                            |                                |                               | Tape & reel |                               |
| FTR-B3GB( )P     |                            |                                | Gold overlay silver palladium | Tube        |                               |
| FTR-B3GB( )P-B10 |                            |                                | Tape & reel                   |             |                               |
| FTR-B3SB( )Z     |                            | Surface mount,<br>space saving | Gold overlay silver nickel    | Tube        |                               |
| FTR-B3SB( )Z-B10 |                            |                                |                               | Tape & reel |                               |
| FTR-B3SB( )P     |                            |                                | Gold overlay silver palladium | Tube        |                               |
| FTR-B3SB( )P-B10 |                            |                                | Tape & reel                   |             |                               |

## CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)





Standard type

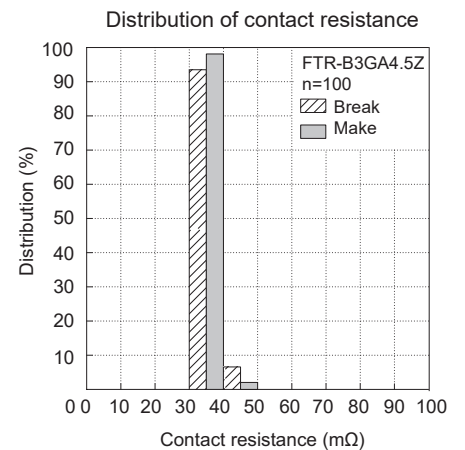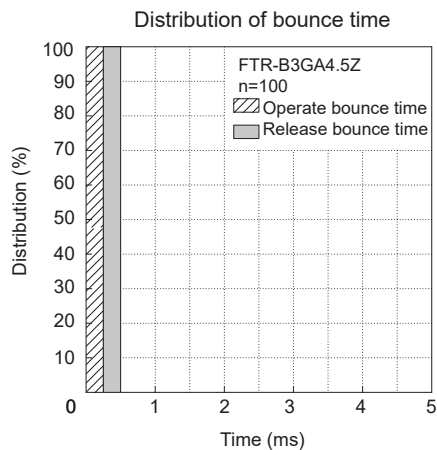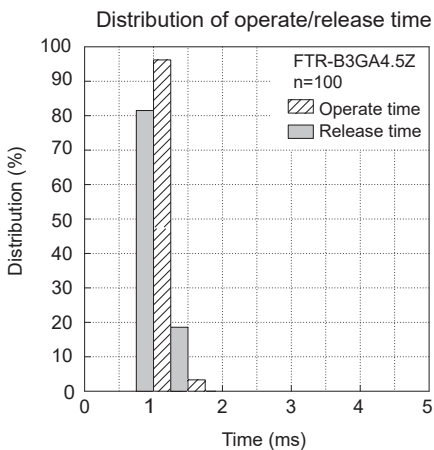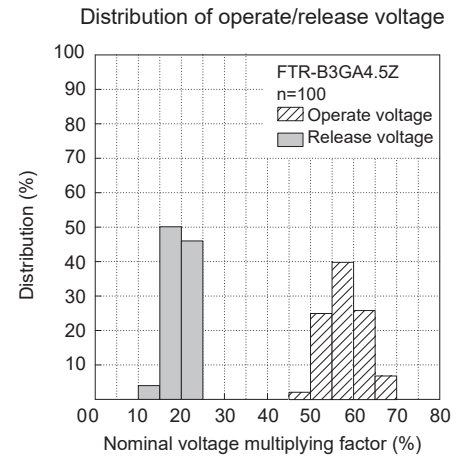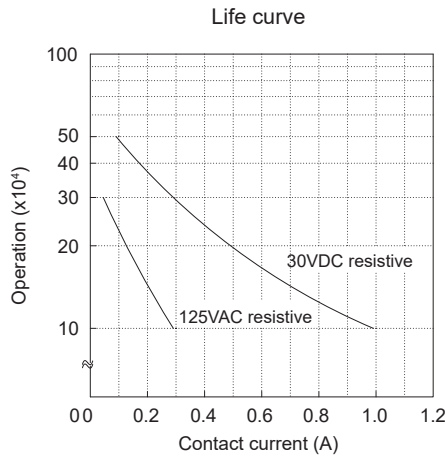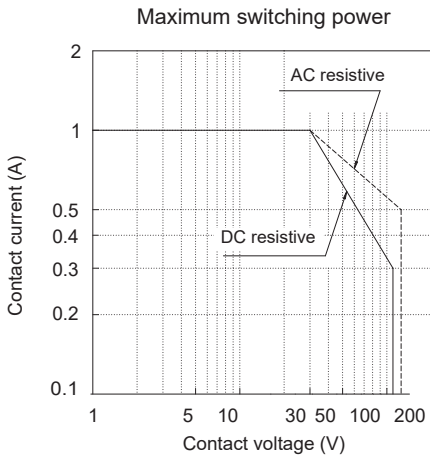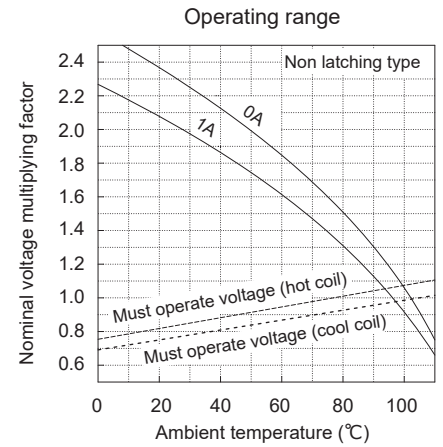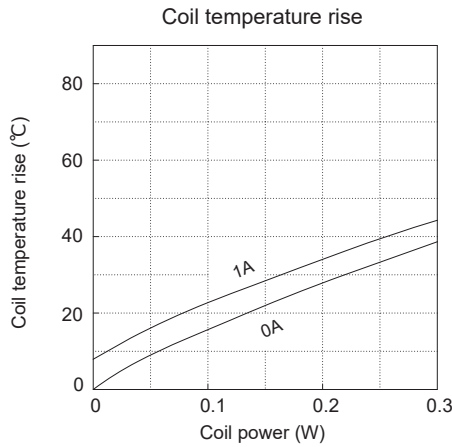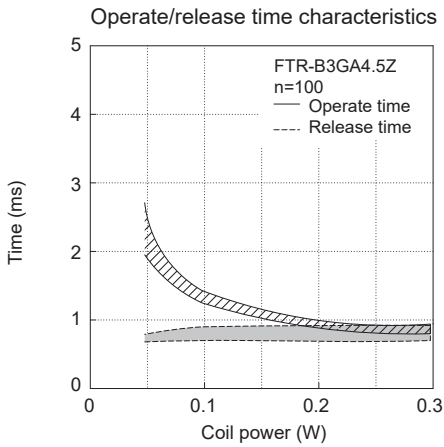

## CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

Standard type

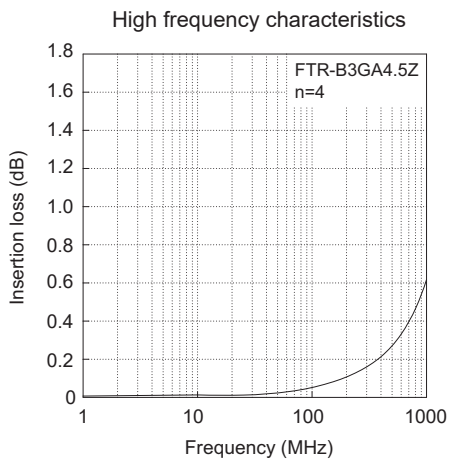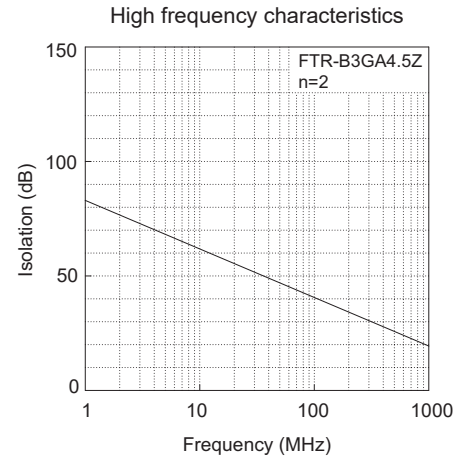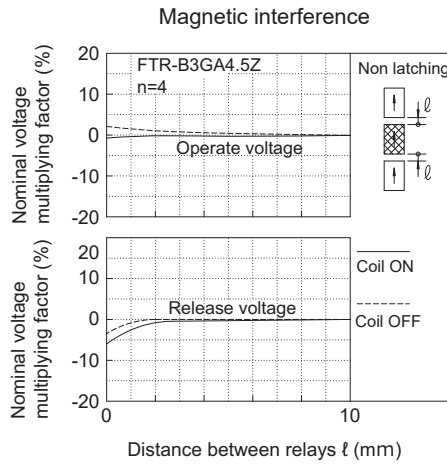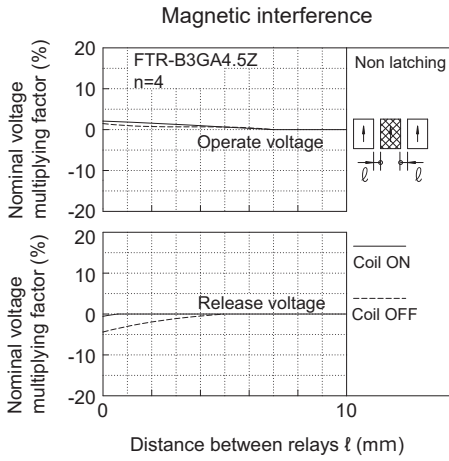


## CHARACTERISTIC DATA


(Characteristic data is not guaranteed value but measured values of samples from production line.)

Latching type


Set/reset time characteristics

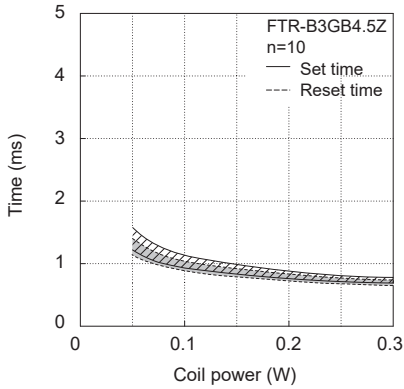


Pulse characteristics

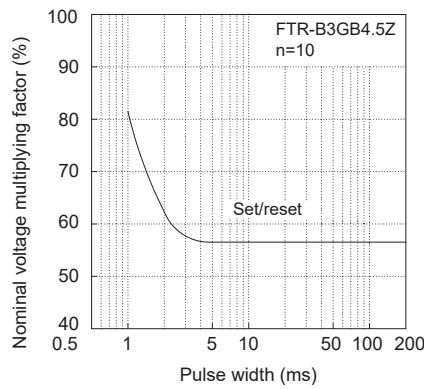


Coil temperature rise

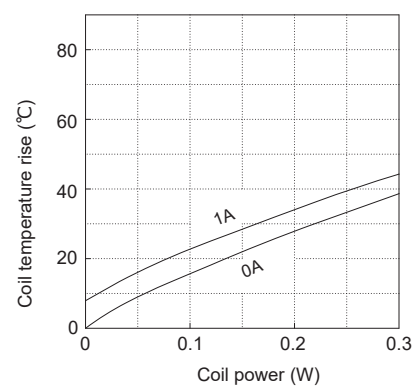


Operating range

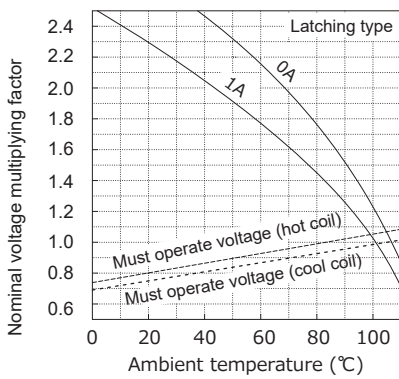


Maximum switching power

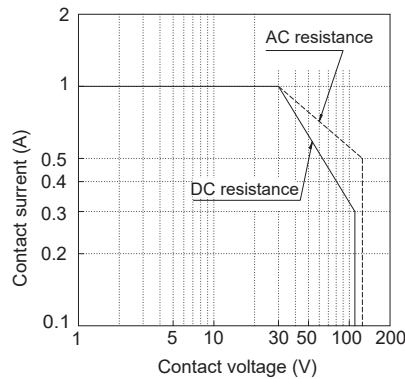


Life curve

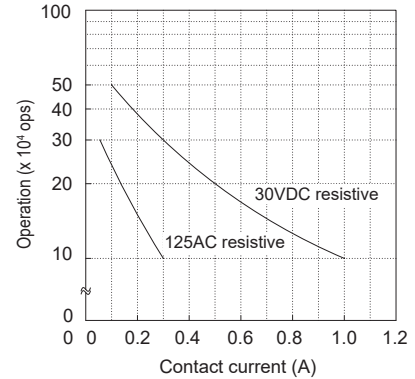


Distribution of set/reset voltage

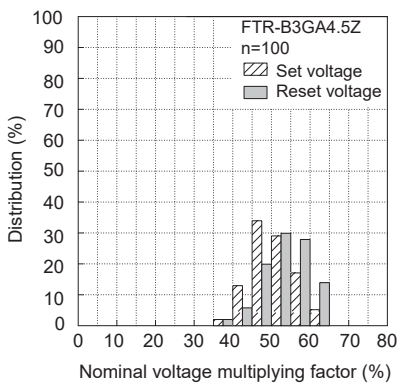


Distribution of set/reset time

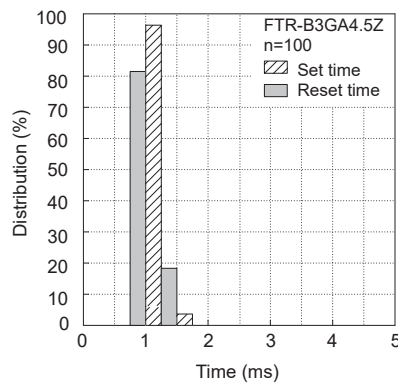


Distribution of bounce time

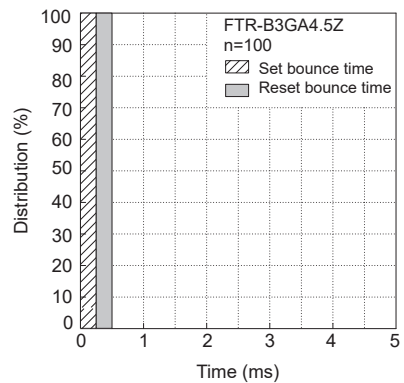


Distribution of contact resistance

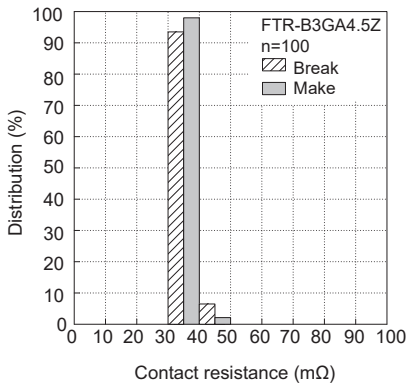

High frequency characteristics

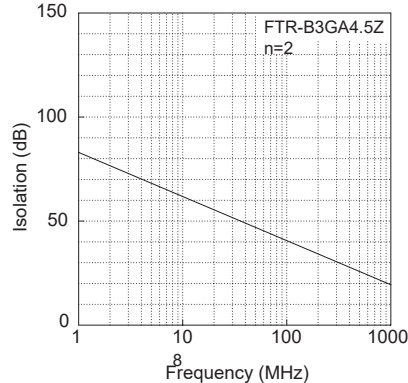

High frequency characteristics

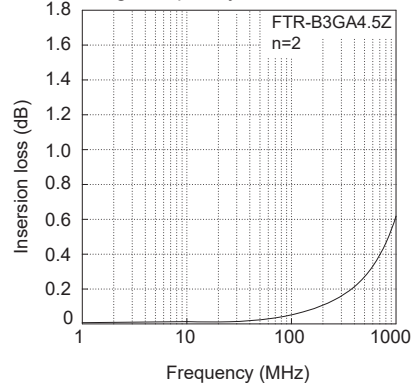

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is not available with through hole type.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

### Notes for latching relays

- Latching relays are shipped in the state reset, but state may change due to shock during transportation or mounting. Before using the relays, it is advisable to bring the relays in necessary state (set or reset) and program a circuit sequence. Otherwise, it will or will not operate simultaneously with power activation.
- Please connect relay coils according to specified polarity.
- Do not apply voltage to both set coil and reset coil at a time.

## GENERAL INFORMATION

### 1. RoHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

#### Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.  
Soldering: Dip within 5 sec. at 255°C±5°C solder bath


Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W  
Temperature: Maximum 350-360°C  
Duration: Maximum 3 sec.

#### Reflow Solder Condition: (Applicable only for reflow capable type)

Recommended reflow soldering profile: IRS (infrared reflow soldering)

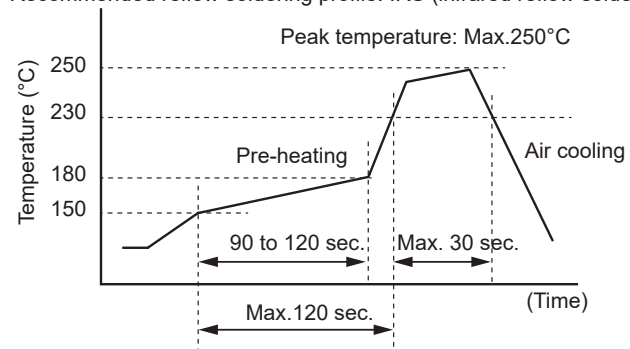

### Important notes for reflow soldering

- Temperature shall be measured at PC board upper surface.
- Temperature at PC board upper surface may be changed depending on size of PC board, components mounted on the PC board and/or heating method. Please perform the confirmation test with actual PC board.
- This reflow condition is applicable only for reflow-capable relays. Do not reflow reflow-incapable relays.
- Recommended solder for assembly: Sn-3.0 Ag -0.5 Cu.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- SMT versions of FTR-B3 relays in Tape & Reel package will be shipped in Moisture Barrier Bag (MBB).
- Moisture Sensitivity Level (MSL) of FTR-B3 relay is indicated on the packing caution label.
- Relays must be stored in the unopened MBB at storage conditions <40°C/90% RH for a maximum 1 year.
- SMT versions of FTR-B3 relays in tube packing will not be shipped in MBB. Therefore, these relays shall be dried by baking before reflow soldering process according to IPC/Jedex J-STD-033.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in-house test.

## Contact

### Japan

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81-3-3450-1682  
Email: [fcl-contact@cs.fcl-components.com](mailto:fcl-contact@cs.fcl-components.com)

### North and South America

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place Suite 480,  
San Jose, CA 95110 USA  
Tel: +1-408-745-4900  
Email: [contact@fcl-components.us](mailto:contact@fcl-components.us)

### Europe

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp, Netherlands  
Tel: +31-23-556-0910  
Email: [info.fceu@cs.fcl-components.com](mailto:info.fceu@cs.fcl-components.com)

### Asia Pacific

FCL COMPONENTS ASIA PTE LTD.  
51 Changi Business Park Central 2, #06-07  
The Signature Singapore 486066  
Tel: +65-6375-8560  
Email: [fcals@fcl-components.com](mailto:fcals@fcl-components.com)

### China

FCL COMPONENTS (SHANGHAI) CO.,LTD.  
Unit 1105, Central Park - Jing An,  
No.329 Heng Feng Road, Shanghai  
200070, China  
Tel: +86-21-3253 0998  
Email: [fcsh@fcl-components.com](mailto:fcsh@fcl-components.com)

### Hong Kong

FCL COMPONENTS HONG KONG CO.,  
LIMITED  
Unit 2313, Seapower Tower, Concordia  
Plaza, No.1 Science Museum Road,  
TST, Kowloon, Hong Kong  
Tel: +852-2881-8495  
Email: [fcals@fcl-components.com](mailto:fcals@fcl-components.com)

Web: [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

---

© 2026 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. March 26, 2026.