

	SPECIFICATION		
	FOR ELECTRO-MAGNET TRANSDUCER		
	TOTAL PAGE	07	www.be-star.com
			RoHS

Customer		Model Name	BMT1606H14 LF
Customer P/N		Product No.	010309
Date	12 Oct. 07	Issue No.	BS/TET01.014B
Page	01 of 07	Issue Date	07/10/12

Approval:

- 1.Characteristics
- 2.Dimension
- 3.Reliability Test
- 4.Packing
5. Notice
6. History change record

Drawn by	Checked by	Approved by	Customer approved
魏 彦 玲	徐 波	陶 红 仲	

BESTAR ELECTRONICS INDUSTRY CO.,LTD

No.199 HuangHe West Road.New district,ChangZhou,JiangSu Province,P.R.China

Tel: +86 519 88222567

Fax: +86 519 88222551

E-mail: wu@be-star.com

<http://www.be-star.com>

BMT1606H14 LF

1. Characteristics

1.1 Electrical and Mechanical Characteristics




No.	Item	Specifications
1	Operating Voltage	4...8Vo-p
2	Rated Voltage	6Vo-p
3	Coil resistance	45±7 Ω
4	b)Coil Impedance	110 Ω
5	a)Sound Output Level at 10cm	≥85dBA
6	a)Rated Current	≤40mA
7	Resonant Frequency	2048Hz
8	Operating Temperature	-40...+85°C
9	Storage Temperature	-40...+85°C
10	Weight	7g
a)rated voltage applied ,square-wave,frequency 2048Hz,50% duty		
b)rated voltage applied ,sine-wave,frequency 2048Hz,measuring current 60 μA		

1.2 Test method:


1.31 Recommended Circuit

the following are examples of externally driven circuits.

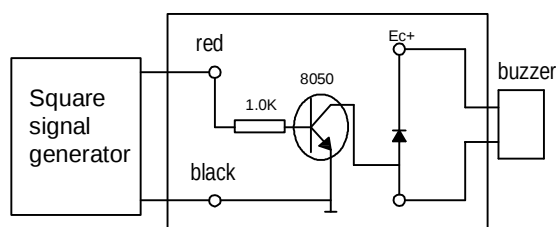

1.32 Standard test Fixture

No reaction in space with in 400mm in all direction

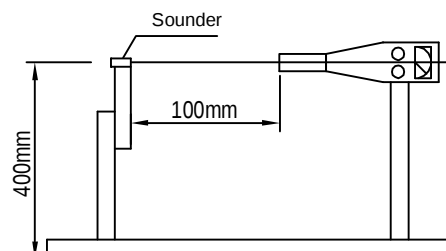


				Date:	07/10/12	BMT1606H14 LF	
B	07/10/12	魏奉玲	ROHS	Drawn by:	魏奉玲		
A	01/05/20	魏奉玲		Checked by:	徐波	Transducer	
Rev.	Date	Drawn	Note	Approved by:	陶红仲		
BESTAR ELECTRONICS INDUSTRY CO.,LTD						DRG NO: BS/TET01.014B	Page:02 of 07
www.be-star.com wu@be-star.com							

BMT1606H14 LF

1.3Frequency response(square wave 6Vo-p 10cm)

MLS-Frequency Response

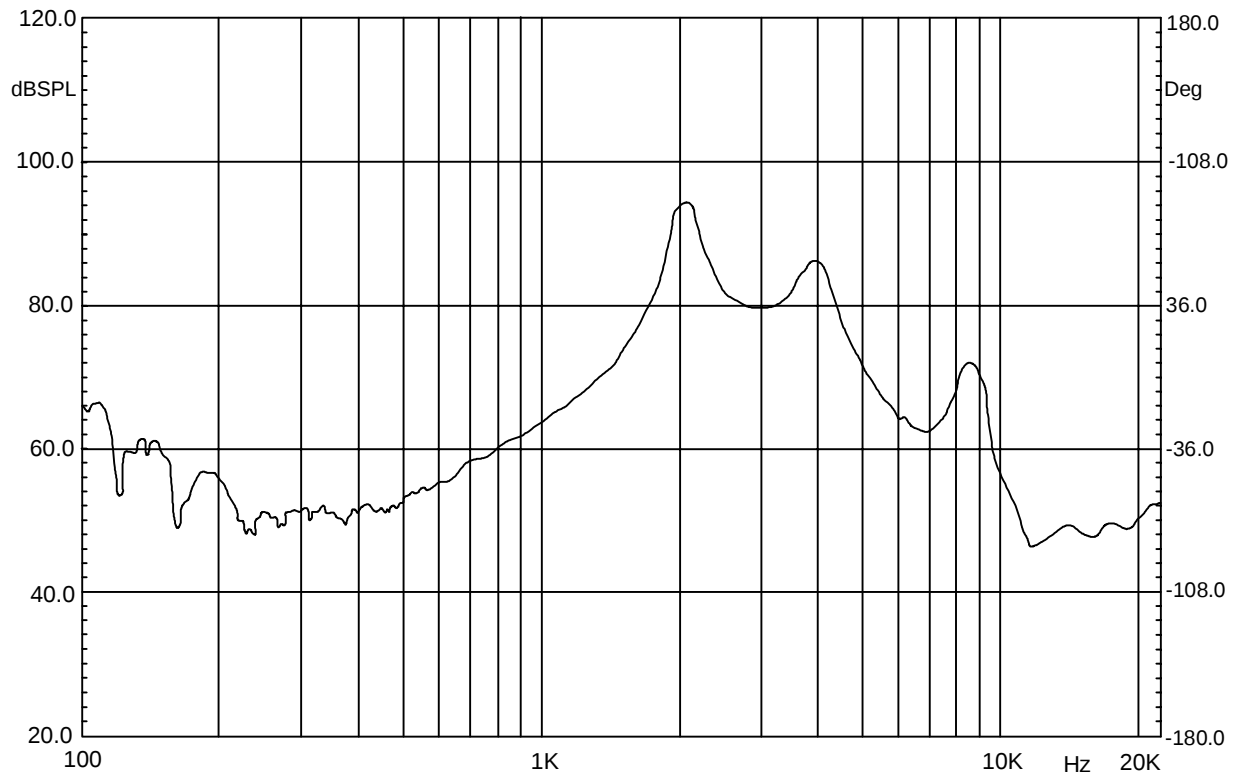


This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content


A	B	07/10/12	魏奉玲	ROHS	Date: 07/10/12	BMT1606H14 LF	
	A	01/05/20	魏奉玲		Drawn by: 魏奉玲		
	REV.	Date	Drawn	Note	Checked by: 徐波	Transducer	
					Approved by: 陶红仲		
BESTAR ELECTRONICS INDUSTRY CO.,LTD						DRG NO: BS/TET01.014B	Page:03 of 07
www.be-star.com wu@be-star.com							

BMT1606H14 LF

2. Dimension

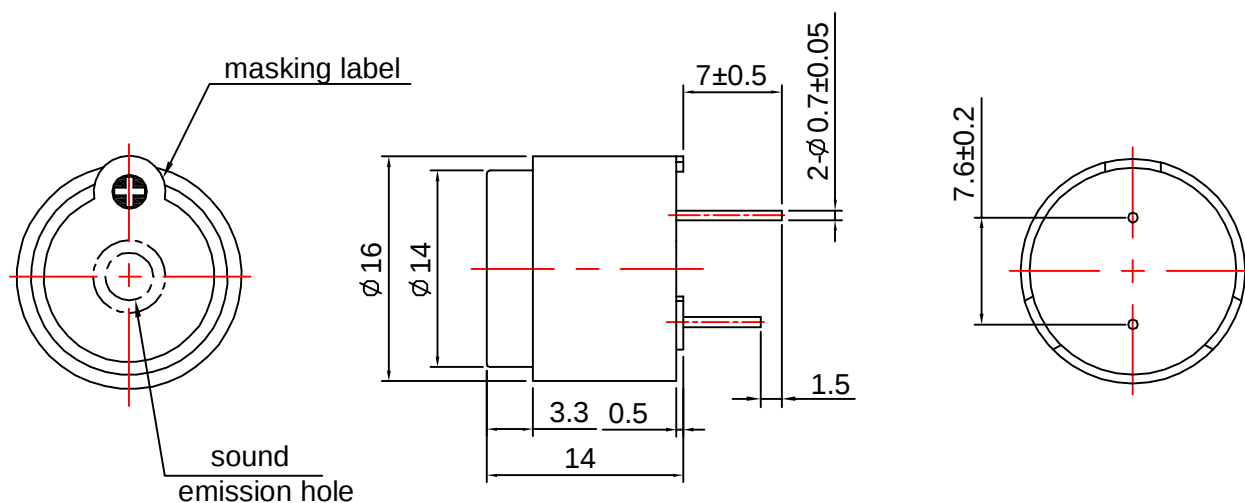

Remark:
Color of printing:golden
"XX . XX" means "week.year"



Tolerance: $\pm 0.3\text{mm}$

A				Date:	07/10/12	BMT1606H14 LF	
	B	07/10/12	魏奉玲	ROHS	Drawn by:	魏奉玲	Transducer
	A	01/05/20	魏奉玲		Checked by:	徐 波	
	REV.	Date	Drawn	Note	Approved by:	陶红仲	
BESTAR ELECTRONICS INDUSTRY CO.,LTD						DRG NO: BS/TET01.014B	Page:04 of 07

BMT1606H14 LF

3. Reliability test

3.1 high temperature test

Temperature +85°C
Duration 96hrs

3.2 low temperature test

Temperature -40°C
Duration 96hrs

3.3 life test in normal temperature

Power supply rated voltage
Duration 1000hrs


3.4 temperature cycle test

Cycles 10



3.5 Humidity cycle test

cycles 10

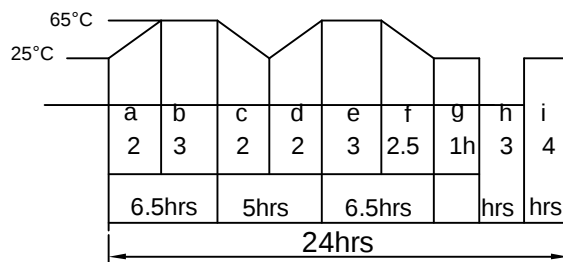

a,b,c,d,e,f,g90%...98%RH
c,g80%...98%RH

All these tests above should be measured after leaving normal temperature for 2hrs.

3.6 Drop test

Height 70cm (to 10mm thickness woodenboard)
Direction 3(X,Y,Z)
Times 3

3.7 Solderability



Temperature 255±5°C
Times 3±0.5sec

Notice: All specification must be satisfied in this condition except SPL.SPL shall be 82dB or more

				Date:	07/10/12	BMT1606H14 LF
B	07/10/12	魏奉玲	ROHS	Drawn by:	魏奉玲	
A	01/05/20	魏奉玲		Checked by:	徐波	Transducer
REV.	Date	Drawn	Note	Approved by:	陶红仲	
BESTAR ELECTRONICS INDUSTRY CO.,LTD						DRG NO: BS/TET01.014B
www.be-star.com wu@be-star.com						Page:05 of 07

BMT1606H14 LF

4. Packing

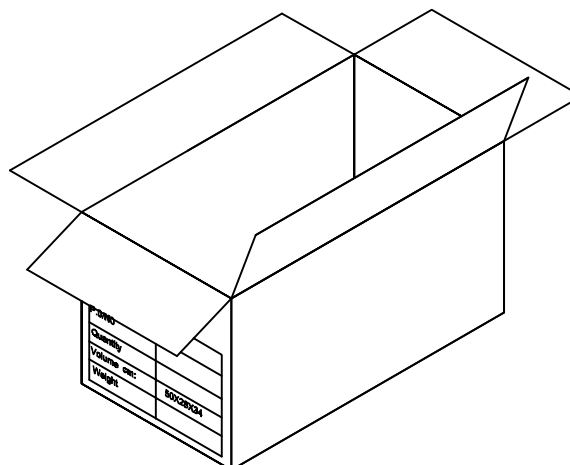

- 1)50pcs/tray
- 2)40trays/carton
- 3)2000 pcs/carton in total
- 4)carton size 50x28x34cm

5. Notice

5.1 The products mustn't be washed

5.2 Storage Condition

The products should be stored in the room ,where the temperature/humidity is stable. And avoid such places where there are large temperature changes.

Please store the product set the following conditions:

Temperature: -10 to + 40°C Humidity: 15 to 85% R.H.

5.3 Expire Date on Storage

Expire date (Shelf life) of the products is six months after delivery under the conditions of a sealed and an unopened package. Please use the products within six months after delivery.

If you store the products for a long time (more than six months), use carefully because the products may be degraded in the solderability and/or rusty.Please confirm solderability and characteristics for the products regularly.

5.4 Notice on Product Storage

(1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced at quality, and/or be degraded in the solderability due to the storage in a chemical atmosphere.

(2) Please use the products immediately after the package is opened, because the characteristics may be reduced at quality, and/or be degraded in the solderability due to storage under the poor condition.

				Date:	07/10/12	BMT1606H14 LF
B	07/10/12	魏奉玲	ROHS	Drawn by:	魏奉玲	
A	01/05/20	魏奉玲		Checked by:	徐波	Transducer
REV.	Date	Drawn	Note	Approved by:	陶红仲	
BESTAR ELECTRONICS INDUSTRY CO.,LTD						DRG NO: BS/TET01.014B
www.be-star.com wu@be-star.com						Page:06 of 07

6. History change record

[illegible]

				Date:	07/10/12	BMT1606H14 LF	
B	07/10/12	魏奉玲	ROHS	Drawn by:	魏奉玲		
A	01/05/20	魏奉玲		Checked by:	徐 波	Transducer	
REV.	Date	Drawn	Note	Approved by:	陶红仲		
BESTAR ELECTRONICS INDUSTRY CO.,LTD www.be-star.com wu@be-star.com						DRG NO: BS/TET01.014B	Page:07 of 07