

High-Speed Drivers and Dual DPST JFET Switches

FEATURES

- Constant On-Resistance Over Entire Analog Range
- Low Leakage
- Low Crosstalk
- Break-Before-Make Switching
- Rad Hardness

BENEFITS

- Low Distortion
- Eliminates Large Signal Errors
- High Precision
- Improved Channel Isolation
- Eliminates Inadvertent Shorting Between Channels
- Fault Protection

APPLICATIONS

- Audio Switching
- Precision Switching
- Video Switching
- Video Routing
- Sample/Hold
- Aerospace

DESCRIPTION



The DG183/184/185 are precision dual double-pole, single-throw (DPST) analog switches designed to provide accurate switching of video and audio signals. This series is ideally suited for applications requiring a constant on-resistance over the entire analog range.

The major difference in the devices is the on-resistance (DG183—10 Ω , DG184—30 Ω , DG185—75 Ω). Reduced errors are achieved through low leakage current ($I_{D(on)}$ < 2 nA). Applications which benefit from the flat JFET

on-resistance include audio switching, video switching, and data acquisition.

To achieve fast and accurate switch performance, each device comprises four n-channel JFET transistors and a TTL compatible bipolar driver. In the on state, each switch conducts current equally well in either direction. In the off condition, the switches will block up to 20 V peak-to-peak, with feedthrough of less than -60 dB at 10 MHz.

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

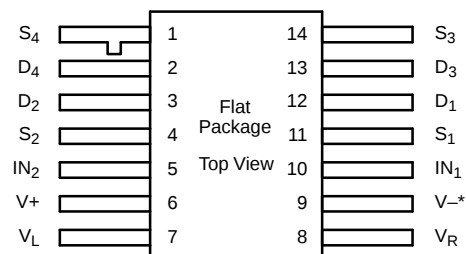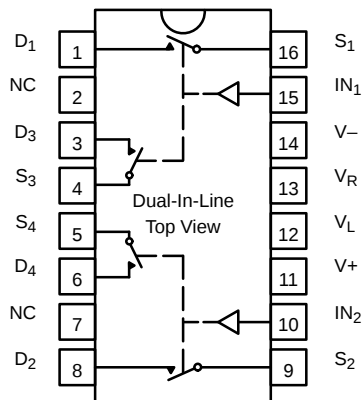

Refer to JAN38510 Information, Military Section
*Common to Substrate and Case

TRUTH TABLE

Logic	Switch
0	OFF
1	ON

Logic "0" $\leq$ 0.8 V
Logic "1" $\geq$ 2.0 V

ORDERING INFORMATION		
Temp Range	Package	Part Number
-25 to 85°C	16-Pin Sidebraz	DG183BP
		DG184BP
-55 to 125°C	16-Pin Sidebraz	DG183AP/883
		DG184AP/883, JM38510/11103BEA
		DG185AP/883, JM38510/11104BEA
	14-Pin Flat Pack	JM38510/11103BXA
		JM38510/11104BXA

ABSOLUTE MAXIMUM RATINGS

V+ to V-	36 V
V+ to V _D	33 V
V _D to V-	33 V
V _D to V _D	±22 V
V _L to V-	36 V
V _L to V _{IN}	8 V
V _L to V _R	8 V
V _{IN} to V _R	8 V
V _R to V-	27 V
V _R to V _{IN}	2 V
Current (S or D) DG183	200 mA

Current (S or D) DG184, DG185	30 mA
Current (All Other Pins)	30 mA
Storage Temperature	-65 to 150°C
Power Dissipation ^a	
16-Pin Sidebraz ^b	900 mW
14-Pin Flat Pack ^c	900 mW

Notes:

- All leads welded or soldered to PC Board.
- Derate 12 mW/°C above 75°C
- Derate 10 mW/°C above 75°C

SCHEMATIC DIAGRAM (TYPICAL CHANNEL)

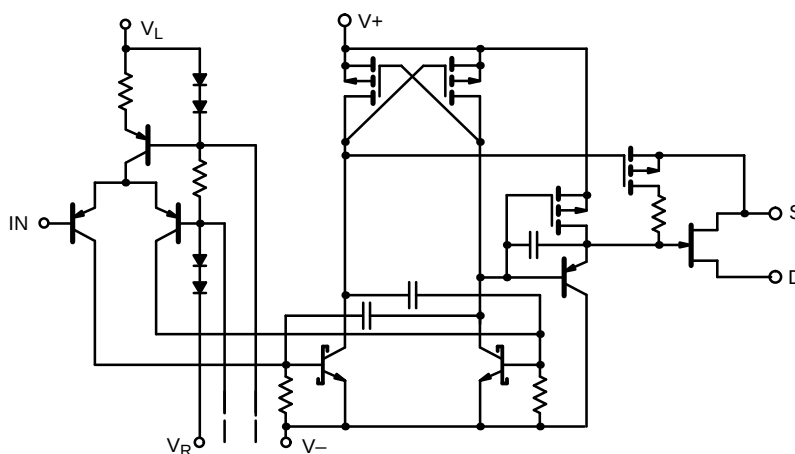


FIGURE 1.

**SPECIFICATIONS^a FOR DG183**

Parameter	Symbol	Test Conditions Unless Specified V ₊ = 15 V, V _– = –15 V, V _L = 5 V V _R = 0 V, V _{IN} = 0.8 V or 2 V ^f		Temp ^b	Typ ^c	A Suffix –55 to 125°C		B Suffix –25 to 85°C		Unit
						Min ^d	Max ^d	Min ^d	Max ^d	
Analog Switch										
Analog Signal Range ^e	V _{ANALOG}			Full		–7.5	15	–7.5	15	V
Drain-Source On-Resistance	r _{DS(on)}	I _S = –10 mA, V _D = –7.5 V		Room Full	7.5		10 20		15 25	Ω
Source Off Leakage Current	I _{S(off)}	V _S = ±10 V, V _D = ∓10 V V ₊ = 10 V, V _– = –20 V		Room Hot	0.05		10 1000		15 300	nA
		V _S = ±7.5 V, V _D = ∓7.5 V		Room Hot	0.05		10 1000		15 300	
Drain Off Leakage Current	I _{D(off)}	V _S = ±10 V, V _D = ∓10 V V ₊ = 10 V, V _– = –20 V		Room Hot	0.04		10 1000		15 300	
		V _S = ±7.5 V, V _D = ∓7.5 V		Room Hot	0.03		10 1000		15 300	
Channel On Leakage Current	I _{D(on)}	V _D = V _S = ±7.5 V		Room Hot	–0.1	–2 –200		–10 –200		
Saturation Drain Current	I _{DSS}	2 ms Pulse Duration		Room	300					mA
Digital Input										
Input Current with Input Voltage High	I _{INH}	V _{IN} = 5 V		Room Hot	<0.01		10 20		10 20	μA
Input Current with Input Voltage Low	I _{INL}	V _{IN} = 0 V		Full	–30	–250		–250		
Dynamic Characteristics										
Turn-On Time	t _{on}	See Switching Time Test Circuit		Room	240		400		600	ns
Turn-Off Time	t _{off}			Room	140		200		220	
Source-Off Capacitance	C _{S(off)}	f = 1 MHz	V _S = –5 V, I _D = 0	Room	21					pF
Drain-Off Capacitance	C _{D(off)}		V _D = –5 V, I _S = 0	Room	17					
Channel-On Capacitance	C _{D(on)}		V _D = V _S = 0 V	Room	17					
Off Isolation	OIRR	f = 1 MHz, R _L = 75 Ω		Room	>55					dB
Power Supplies										
Positive Supply Current	I ₊	V _{IN} = 0 V, or 5 V		Room	0.6		1.5		1.5	mA
Negative Supply Current	I _–			Room	–2.7	–5		–5		
Logic Supply Current	I _L			Room	3.1		4.5		4.5	
Reference Supply Current	I _R			Room	–1	–2		–2		

Notes:

- Refer to PROCESS OPTION FLOWCHART.
- Room = 25°C, Full = as determined by the operating temperature suffix.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Guaranteed by design, not subject to production test.
- V_{IN} = input voltage to perform proper function.

**SPECIFICATIONS^a FOR DG184**

Parameter	Symbol	Test Conditions Unless Specified $V_+ = 15\text{ V}$, $V_- = -15\text{ V}$, $V_L = 5\text{ V}$ $V_R = 0\text{ V}$, $V_{IN} = 0.8\text{ V}$ or 2 V^f	Temp ^b	Typ ^c	A Suffix –55 to 125°C		B Suffix –25 to 85°C		Unit	
					Min ^d	Max ^d	Min ^d	Max ^d		
Analog Switch										
Analog Signal Range ^e	V_{ANALOG}		Full		–7.5	15	–7.5	15	V	
Drain-Source On-Resistance	$r_{DS(on)}$	$I_S = -10\text{ mA}$, $V_D = -7.5\text{ V}$	Room Full	22		30 60		50 75	Ω	
Source Off Leakage Current	$I_{S(off)}$	$V_S = \pm 10\text{ V}$, $V_D = \mp 10\text{ V}$ $V_+ = 10\text{ V}$, $V_- = -20\text{ V}$	Room Hot	0.06		1 100		5 100	nA	
		$V_S = \pm 7.5\text{ V}$, $V_D = \mp 7.5\text{ V}$	Room Hot	0.05		1 100		5 100		
Drain Off Leakage Current	$I_{D(off)}$	$V_S = \pm 10\text{ V}$, $V_D = \mp 10\text{ V}$ $V_+ = 10\text{ V}$, $V_- = -20\text{ V}$	Room Hot	0.4		1 100		5 100		
		$V_S = \pm 7.5\text{ V}$, $V_D = \mp 7.5\text{ V}$	Room Hot	0.3		1 100		5 100		
Channel On Leakage Current	$I_{D(on)}$	$V_D = V_S = \pm 7.5\text{ V}$	Room Hot	–0.02	–2 –200		–10 –200			
Digital Input										
Input Current with Input Voltage High	I_{INH}	$V_{IN} = 5\text{ V}$	Room Hot	<0.01		10 20		10 20	μA	
Input Current with Input Voltage Low	I_{INL}	$V_{IN} = 0\text{ V}$	Full	–30	–250		–250			
Dynamic Characteristics										
Turn-On Time	t_{on}	See Switching Time Test Circuit		Room	85		150		180	ns
Turn-Off Time	t_{off}			Room	95		130		150	
Source-Off Capacitance	$C_{S(off)}$	f = 1 MHz	Room	9					pF	
Drain-Off Capacitance	$C_{D(off)}$		Room	6						
Channel-On Capacitance	$C_{D(on)}$		Room	14						
Off Isolation	OIRR	f = 1 MHz, $R_L = 75\text{ }\Omega$		Room	>50				dB	
Power Supplies										
Positive Supply Current	I_+	$V_{IN} = 0\text{ V}$, or 5 V		Room	0.6		3		3	mA
Negative Supply Current	I_-			Room	–2.7	–5.5		–5.5		
Logic Supply Current	I_L			Room	3.1		4.5		4.5	
Reference Supply Current	I_R			Room	–1	–2		–2		

Notes:

- Refer to PROCESS OPTION FLOWCHART.
- Room = 25°C, Full = as determined by the operating temperature suffix.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Guaranteed by design, not subject to production test.
- V_{IN} = input voltage to perform proper function.







**SPECIFICATIONS^a FOR DG185**





Parameter	Symbol	Test Conditions Unless Otherwise Specified V+ = 15 V, V− = −15 V, VL = 5 V VR = 0 V, VIN = 0.8 V or 2 V ^f	Temp ^b	Typ ^c	A Suffix −55 to 125°C		B Suffix −25 to 85°C		Unit	
					Min ^d	Max ^d	Min ^d	Max ^d		
Analog Switch										
Analog Signal Range ^e	VANALOG		Full		−10	15	−10	15	V	
Drain-Source On-Resistance	rDS(on)	IS = −10 mA, VD = −7.5 V	Room Full	35		75 150		100 150	Ω	
Source Off Leakage Current	IS(off)	VS = ±10 V, VD = ∓10 V V+ = 10 V, V− = −20 V	Room Hot	0.05		1 100		5 100	nA	
		VS = ±10 V, VD = ∓10 V	Room Hot	0.07		1 100		5 100		
Drain Off Leakage Current	ID(off)	VS = ±10 V, VD = ∓10 V V+ = 10 V, V− = −20 V	Room Hot	0.4		1 100		5 100		
		VS = ±10 V, VD = ∓10 V	Room Hot	0.3		1 100		5 100		
Channel On Leakage Current	ID(on)	VD = VS = ±10 V	Room Hot	−0.03	−2 −200		−10 −200			
Digital Input										
Input Current with Input Voltage High	IINH	VIN = 5 V	Room Hot	<0.01		10 20		10 20	μA	
Input Current with Input Voltage Low	IINL	VIN = 0 V	Full	−30	−250		−250			
Dynamic Characteristics										
Turn-On Time	ton	See Switching Time Test Circuit		Room	120		250	300	ns	
Turn-Off Time	toff			Room	100		130			150
Source-Off Capacitance	CS(off)	f = 1 MHz	Room	9					pF	
Drain-Off Capacitance	CD(off)		Room	6						
Channel-On Capacitance	CD(on)		Room	14						
Off Isolation	OIRR	f = 1 MHz, RL = 75 Ω		Room	>50				dB	
Power Supplies										
Positive Supply Current	I+	VIN = 0 V, or 5 V		Room	0.6		3	3	mA	
Negative Supply Current	I−			Room	−2.7	−5.5		−5.5		
Logic Supply Current	IL			Room	3.1		4.5			4.5
Reference Supply Current	IR			Room	−1	−2		−2		

Notes:

- Refer to PROCESS OPTION FLOWCHART.
- Room = 25°C, Full = as determined by the operating temperature suffix.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Guaranteed by design, not subject to production test.
- V_{IN} = input voltage to perform proper function.

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

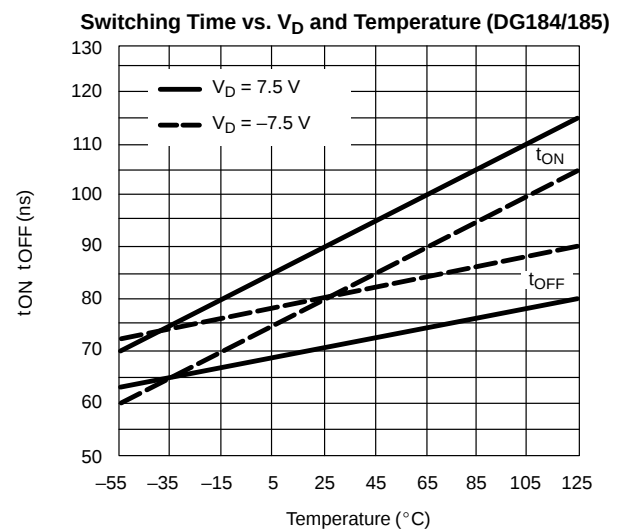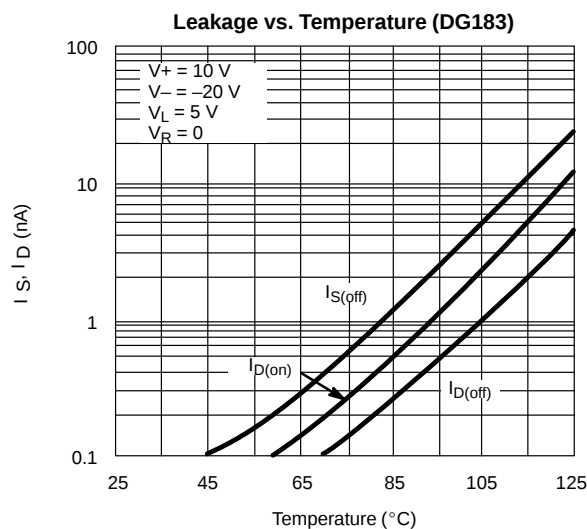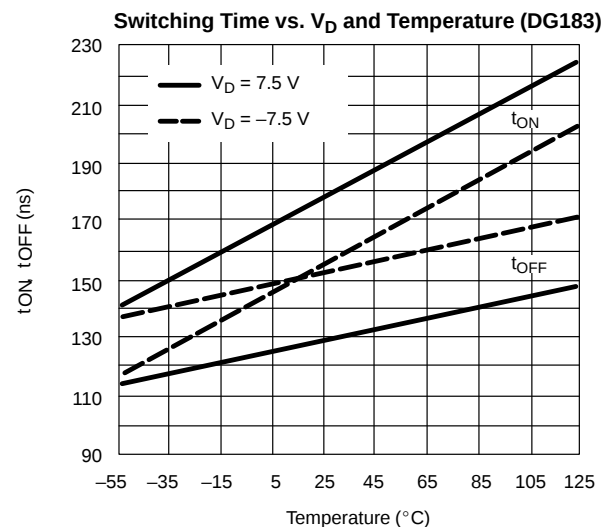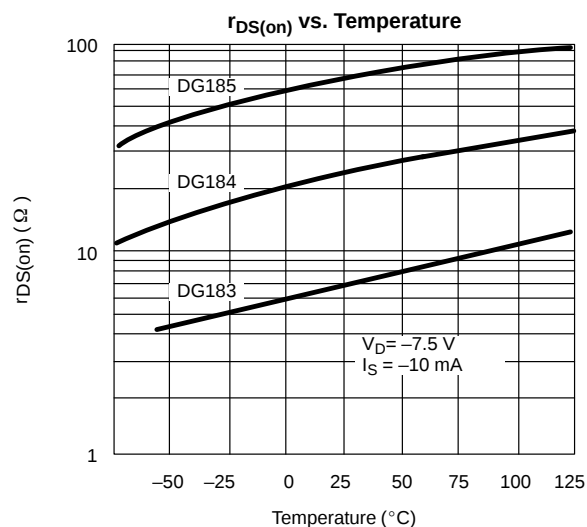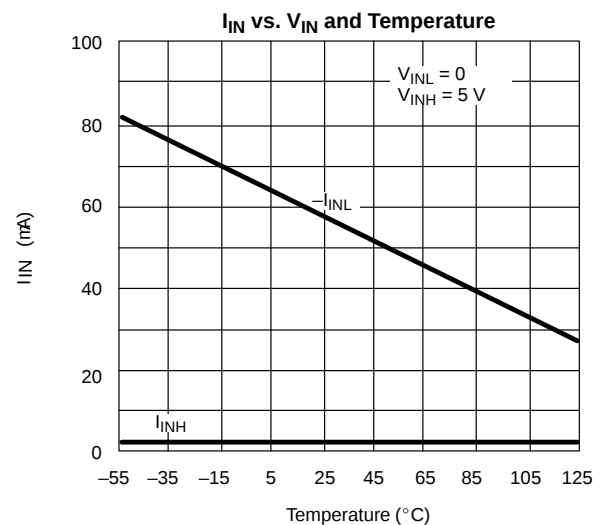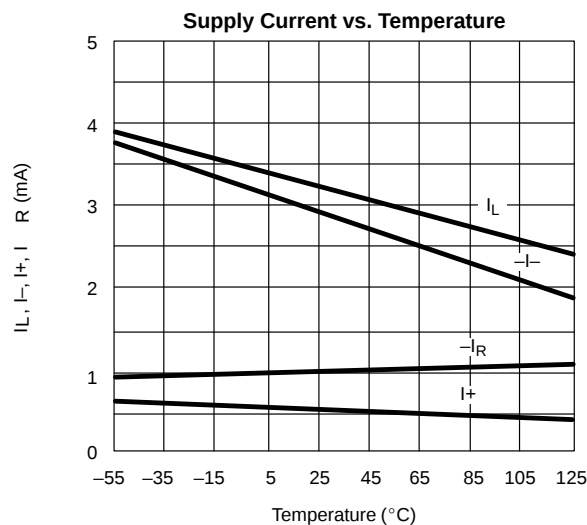

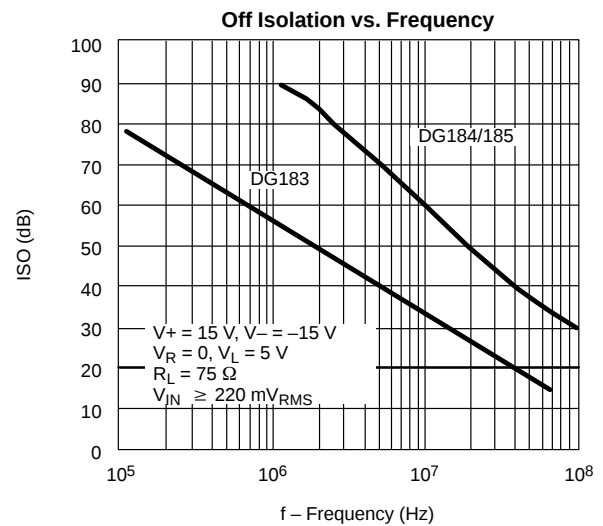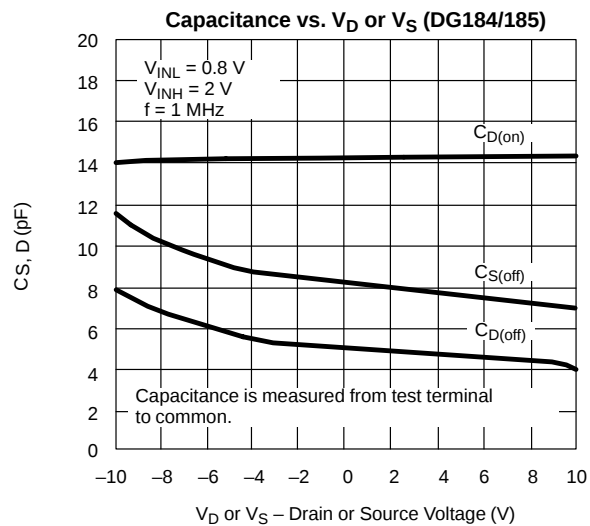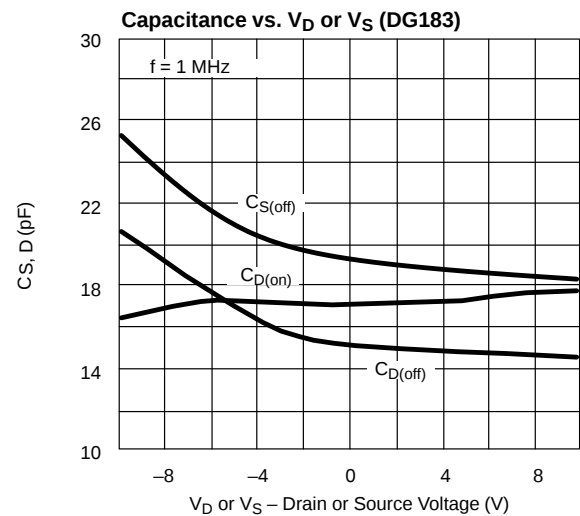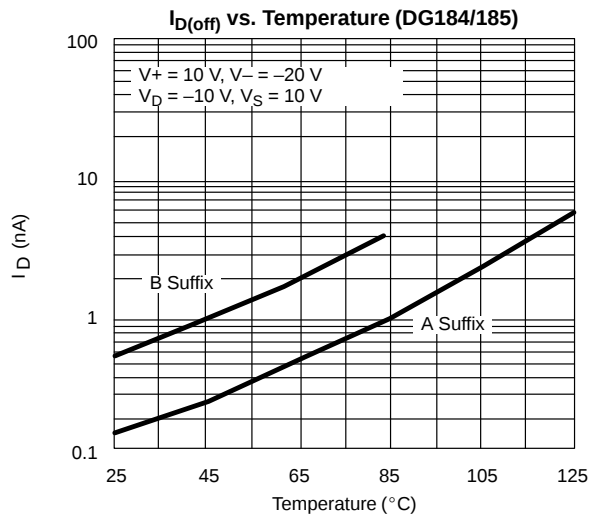TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


TEST CIRCUITS

Feedthrough due to charge injection may result in spikes at the leading and trailing edge of the output waveform.

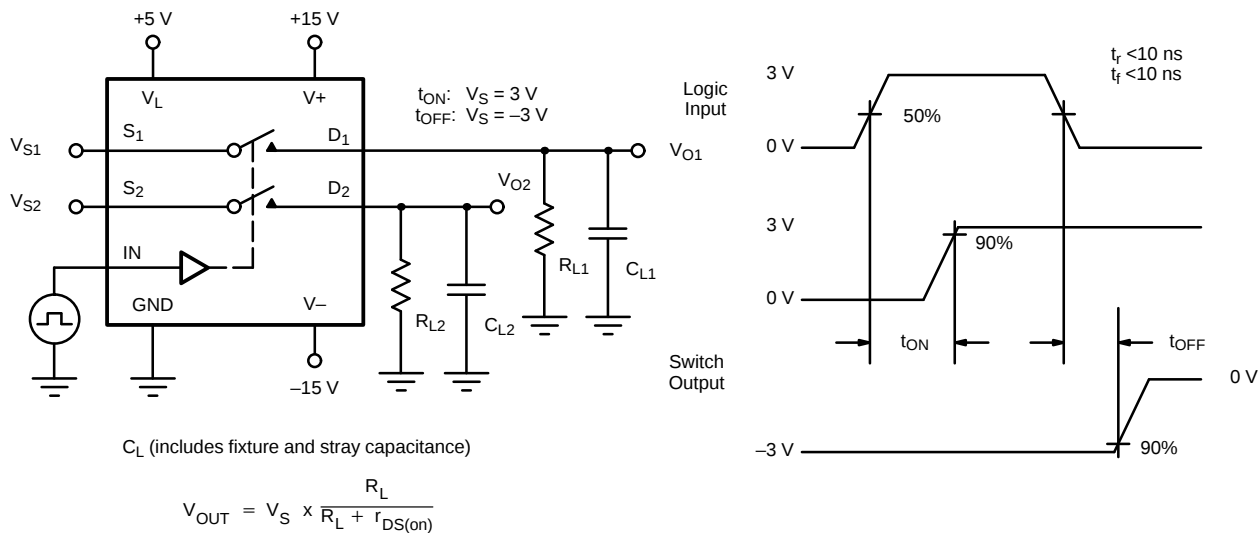


FIGURE 2. Switching Time

APPLICATION HINTS^a

Switch	V+ Positive Supply Voltage (V)	V− Negative Supply Voltage (V)	V _L Logic Supply Voltage (V)	V _R Reference Supply Voltage (V)	V _{IN} Logic Input Voltage V _{INH(min)} /V _{INL(max)} (V)	V _S Analog Voltage Range (V)
DG183 DG184	15 ^b	−15	5	GND	2.0/0.8	−7.5 to 15
	10	−20	5	GND	2.0/0.8	−12.5 to 10
	12	−12	5	GND	2.0/0.8	−4.5 to 12
DG185	15 ^b	−15	5	GND	2.0/0.8	−10 to 15
	10	−20	5	GND	2.0/0.8	−15 to 10
	12	−12	5	GND	2.0/0.8	−7 to 12

Notes:

- a. Application Hints are for DESIGN AID ONLY, not guaranteed and not subject to production testing.
b. Electrical Parameter Chart based on $V_+ = 15\text{ V}$, $V_L = 5\text{ V}$, $V_R = \text{GND}$.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.