
MOSFET – Power, Single N-Channel


80 V, 157 A, 2.8 mΩ

NVMFS6H801N

$V_{(BR)DSS}$	$R_{DS(ON)}$ MAX	I_D MAX
80 V	2.8 mΩ @ 10 V	157 A



DFN5
(SO−8FL)
CASE 488AA
STYLE 1



DFNW5
(FULL−CUT SO8FL WF)
CASE 507BA

Features

- Small Footprint (5x6 mm) for Compact Design
- Low $R_{DS(on)}$ to Minimize Conduction Losses
- Low Q_G and Capacitance to Minimize Driver Losses
- NVMFS6H801NWF − Wettable Flank Option for Enhanced Optical Inspection
- AEC−Q101 Qualified and PPAP Capable
- These Devices are Pb−Free and are RoHS Compliant

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)


Symbol	Parameter			Value	Unit
V_{DSS}	Drain−to−Source Voltage			80	V
V_{GS}	Gate−to−Source Voltage			±20	V
I_D	Continuous Drain Current $R_{\theta JC}$ (Notes 1, 3)	Steady State	T_C = 25°C	157	A
			T_C = 100°C	111	
P_D	Power Dissipation $R_{\theta JC}$ (Note 1)		T_C = 25°C	166	W
			T_C = 100°C	83	
I_D	Continuous Drain Current $R_{\theta JA}$ (Notes 1, 2, 3)	Steady State	T_A = 25°C	23	A
			T_A = 100°C	16	
P_D	Power Dissipation $R_{\theta JA}$ (Notes 1, 2)		T_A = 25°C	3.8	W
			T_A = 100°C	1.9	
I_{DM}	Pulsed Drain Current	T_A = 25°C, t_p = 10 μs		900	A
T_J, T_{stg}	Operating Junction and Storage Temperature Range			−55 to +175	°C
I_S	Source Current (Body Diode)			138	A
E_{AS}	Single Pulse Drain−to−Source Avalanche Energy ($I_{L(pk)}$ = 12.2 A)			960	mJ
T_L	Lead Temperature for Soldering Purposes (1/8″ from case for 10 s)			260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL RESISTANCE MAXIMUM RATINGS


Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Junction−to−Case − Steady State	0.9	°C/W
$R_{\theta JA}$	Junction−to−Ambient − Steady State (Note 2)	39	

1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
2. Surface−mounted on FR4 board using a 650 mm^2, 2 oz. Cu pad.
3. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.



N−CHANNEL MOSFET

MARKING DIAGRAM



XXXXXX = 6H801N
(NVMFS6H801N) or
801NWF
(NVMFS6H801NWF)
A = Assembly Location
Y = Year
W = Work Week
ZZ = Lot Traceability

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 5.

© Semiconductor Components Industries, LLC, 2016

Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Test Condition		Min	Typ	Max	Unit
OFF CHARACTERISTICS							
$V_{(BR)DSS}$	Drain−to−Source Breakdown Voltage	V_{GS} = 0 V, I_D = 250 μA		80			V
$V_{(BR)DSS}/T_J$	Drain−to−Source Breakdown Voltage Temperature Coefficient				38		mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS} = 0 V, V_{DS} = 80 V	T_J = 25 °C			10	μA
			T_J = 125°C			100	
I_{GSS}	Gate−to−Source Leakage Current	V_{DS} = 0 V, V_{GS} = 20 V				100	nA
ON CHARACTERISTICS (Note 4)							
$V_{GS(TH)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 250 μA		2.0		4.0	V
$V_{GS(TH)}/T_J$	Threshold Temperature Coefficient				7.2		mV/°C
$R_{DS(on)}$	Drain−to−Source On Resistance	V_{GS} = 10 V	I_D = 50 A		2.3	2.8	mΩ
g_{FS}	Forward Transconductance	V_{DS} =15 V, I_D = 50 A			128		S
CHARGES, CAPACITANCES & GATE RESISTANCE							
C_{ISS}	Input Capacitance	V_{GS} = 0 V, f = 1 MHz, V_{DS} = 40 V			4120		pF
C_{OSS}	Output Capacitance				586		
C_{RSS}	Reverse Transfer Capacitance				22		
$Q_{G(TOT)}$	Total Gate Charge	V_{GS} = 10 V, V_{DS} = 40 V; I_D = 50 A			64		nC
$Q_{G(TH)}$	Threshold Gate Charge	V_{GS} = 10 V, V_{DS} = 40 V; I_D = 50 A			11		
Q_{GS}	Gate−to−Source Charge				19		
Q_{GD}	Gate−to−Drain Charge				13		
V_{GP}	Plateau Voltage				5.0		V
SWITCHING CHARACTERISTICS (Note 5)							
$t_{d(ON)}$	Turn−On Delay Time	V_{GS} = 10 V, V_{DS} = 64 V, I_D = 50 A, R_G = 2.5 Ω			25		ns
t_r	Rise Time				74		
$t_{d(OFF)}$	Turn−Off Delay Time				70		
t_f	Fall Time				19		
DRAIN−SOURCE DIODE CHARACTERISTICS							
V_{SD}	Forward Diode Voltage	V_{GS} = 0 V, I_S = 50 A	T_J = 25°C		0.8	1.2	V
			T_J = 125°C		0.7		
t_{RR}	Reverse Recovery Time	V_{GS} = 0 V, dIS/dt = 100 A/μs, I_S = 50 A			64		ns
t_a	Charge Time				36		
t_b	Discharge Time				28		
Q_{RR}	Reverse Recovery Charge				98		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
5. Switching characteristics are independent of operating junction temperatures.

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS

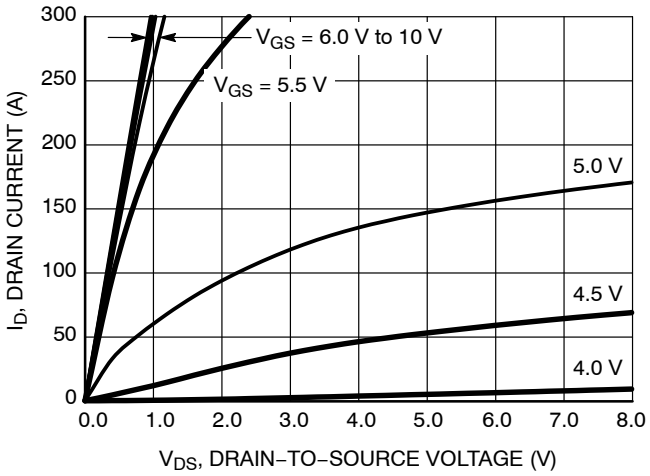


Figure 1. On−Region Characteristics

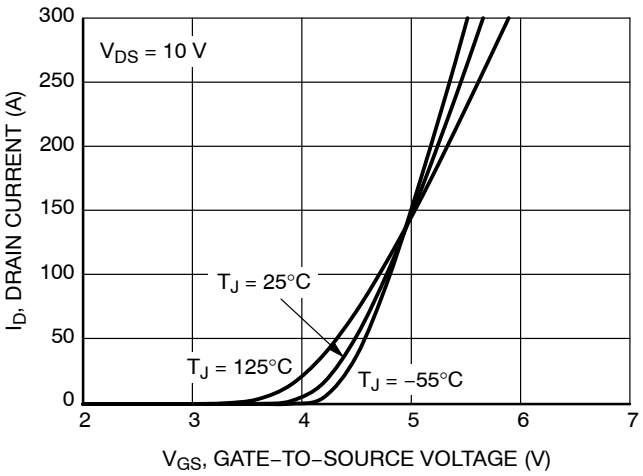


Figure 2. Transfer Characteristics

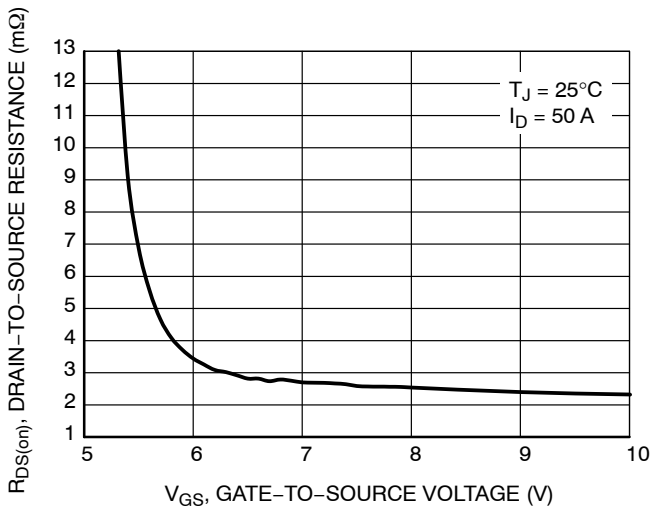


Figure 3. On−Resistance vs. Gate−to−Source Voltage

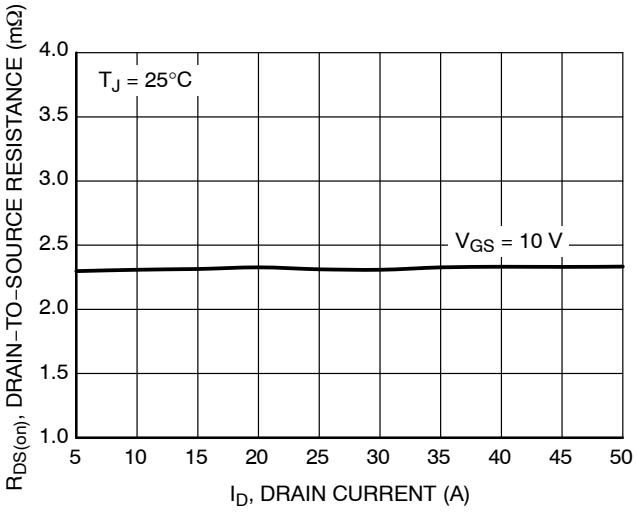


Figure 4. On−Resistance vs. Drain Current and Gate Voltage

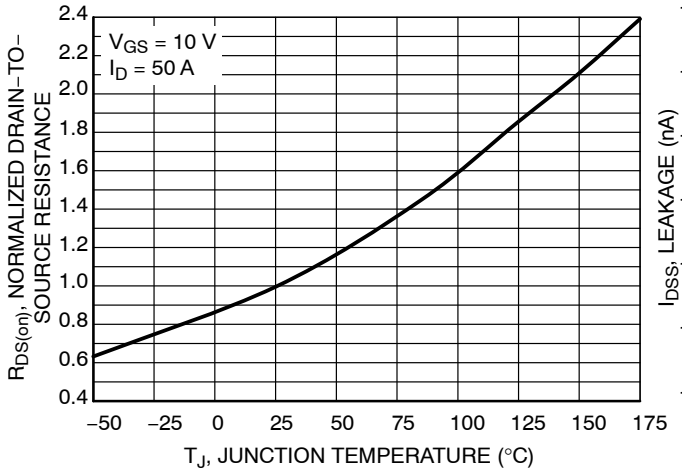


Figure 5. On−Resistance Variation with Temperature

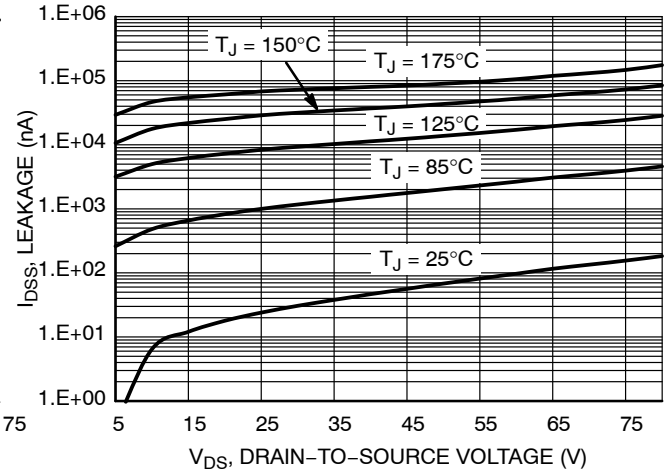


Figure 6. Drain−to−Source Leakage Current vs. Voltage

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (continued)

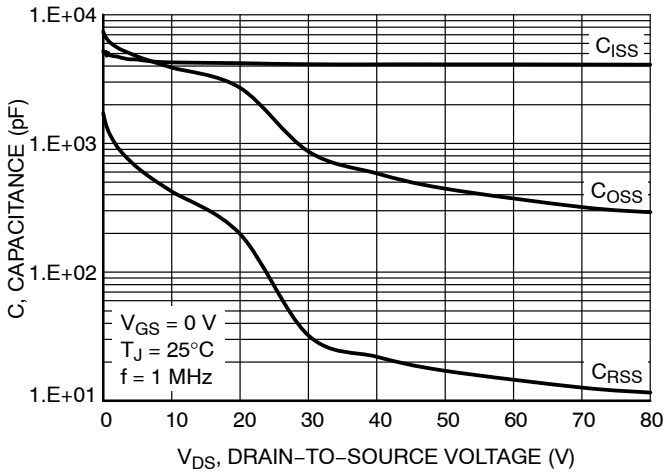


Figure 7. Capacitance Variation

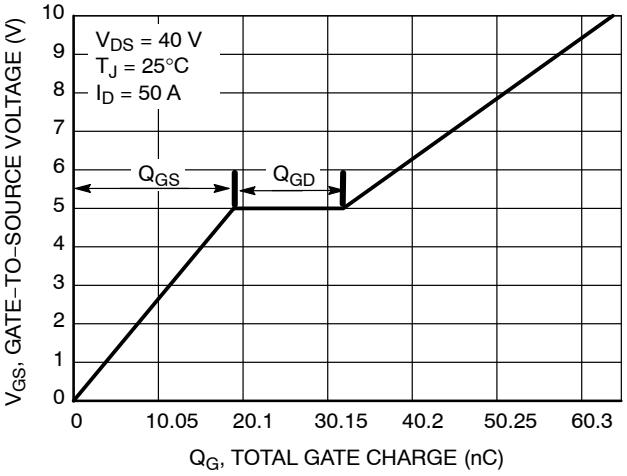


Figure 8. Gate−to−Source vs. Total Charge

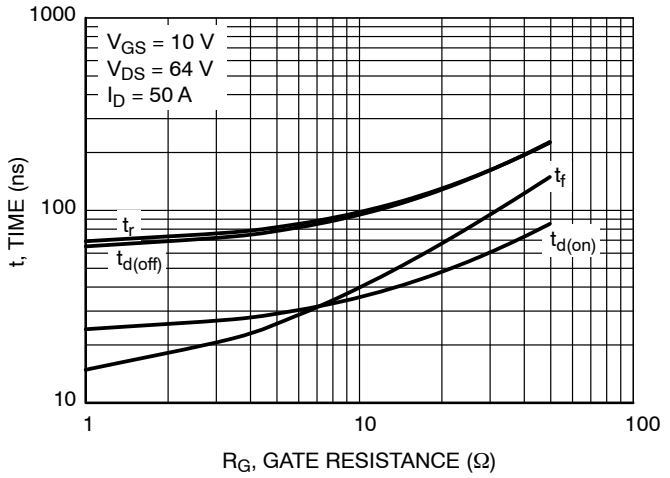


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

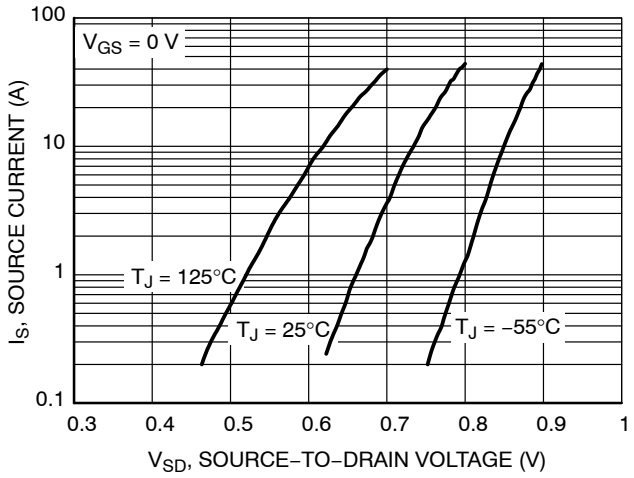


Figure 10. Diode Forward Voltage vs. Current

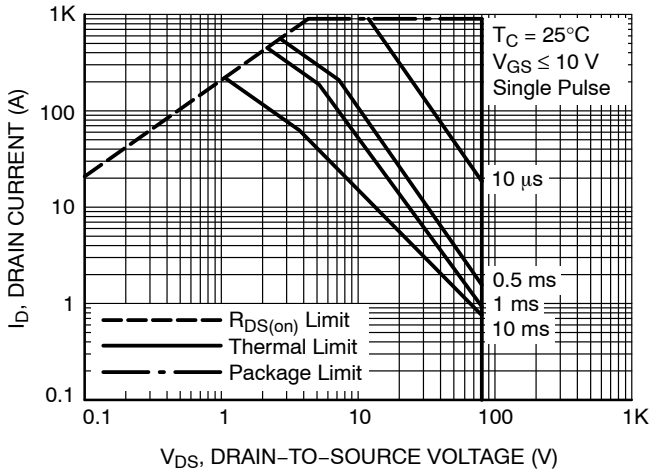


Figure 11. Maximum Rated Forward Biased Safe Operating Area

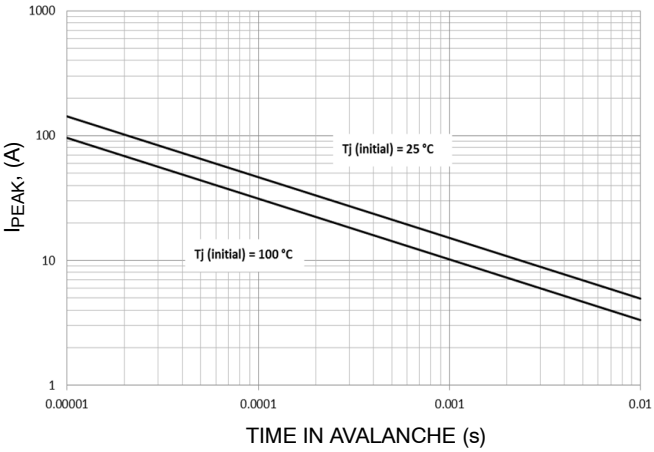


Figure 12. I_{PEAK} vs. Time in Avalanche

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (continued)

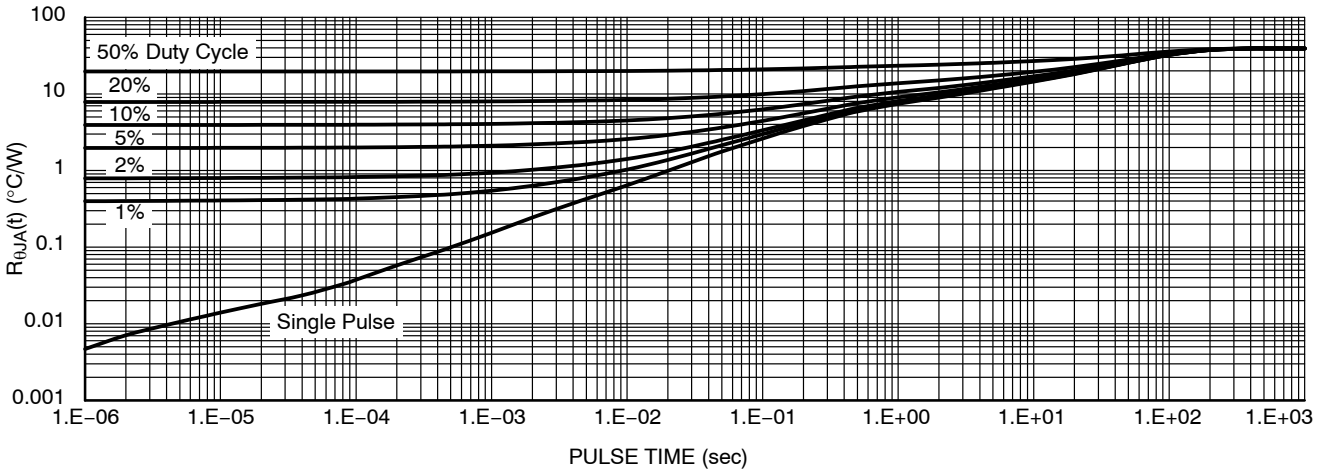


Figure 13. Thermal Characteristics

DEVICE ORDERING INFORMATION

Device	Marking	Package	Shipping†
NVMFS6H801NT1G	6H801N	DFN5 (Pb−Free)	1500 / Tape & Reel
NVMFS6H801NT3G	6H801N	DFN5 (Pb−Free)	5000 / Tape & Reel
NVMFS6H801NWFT1G	801NWF	DFNW5 (Pb−Free, Wettable Flanks)	1500 / Tape & Reel

DISCONTINUED (Note 6)


NVMFS6H801NWFT3G	801NWF	DFNW5 (Pb−Free, Wettable Flanks)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

6. **DISCONTINUED:** This device is not recommended for new design. Please contact your **onsemi** representative for information. The most current information on this device may be available on www.onsemi.com.

Share Feedback
Your Opinion Matters


Downloaded from Arrow.com.



SCALE 2:1


DFN5 5x6, 1.27P
(SO−8FL)
CASE 488AA
ISSUE N

DATE 25 JUN 2018

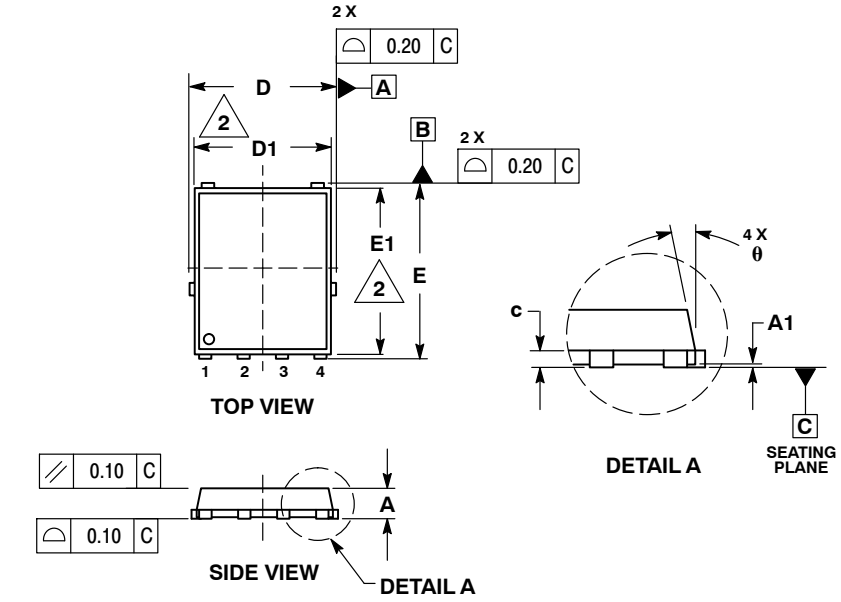


NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH PROTRUSIONS OR GATE BURRS.

	MILLIMETERS		
DIM	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.00	–––	0.05
b	0.33	0.41	0.51
c	0.23	0.28	0.33
D	5.00	5.15	5.30
D1	4.70	4.90	5.10
D2	3.80	4.00	4.20
E	6.00	6.15	6.30
E1	5.70	5.90	6.10
E2	3.45	3.65	3.85
e	1.27 BSC		
G	0.51	0.575	0.71
K	1.20	1.35	1.50
L	0.51	0.575	0.71
L1	0.125 REF		
M	3.00	3.40	3.80
θ	0 °	–––	12 °

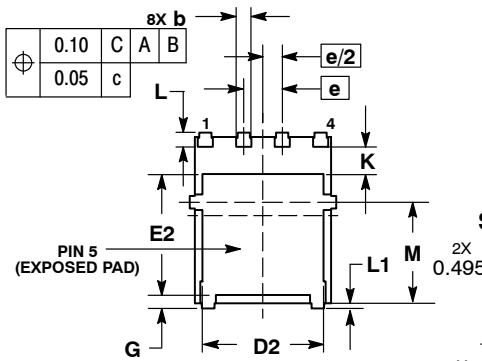


GENERIC MARKING DIAGRAM*



XXXXXX = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
ZZ = Lot Traceability

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present. Some products may not follow the Generic Marking.

RECOMMENDED SOLDERING FOOTPRINT*

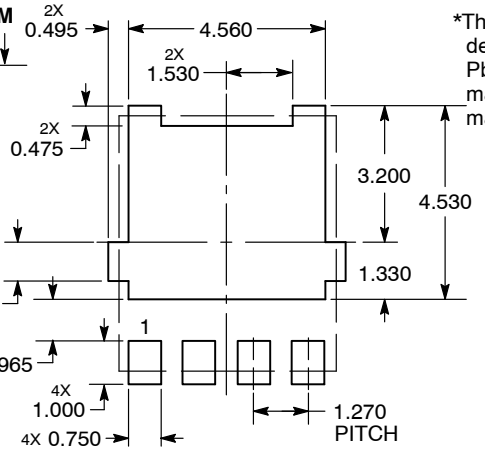

DIMENSIONS: MILLIMETERS

STYLE 1:
PIN 1. SOURCE
2. SOURCE
3. SOURCE
4. GATE
5. DRAIN


STYLE 2:
PIN 1. ANODE
2. ANODE
3. ANODE
4. NO CONNECT
5. CATHODE

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	**98AON14036D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**DFN5 5x6, 1.27P (SO−8FL)**	**PAGE 1 OF 1**


onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.


Downloaded from Arrow.com.





DFNW5 4.90x5.90x1.00, 1.27P
CASE 507BA
ISSUE C


DATE 19 SEP 2024

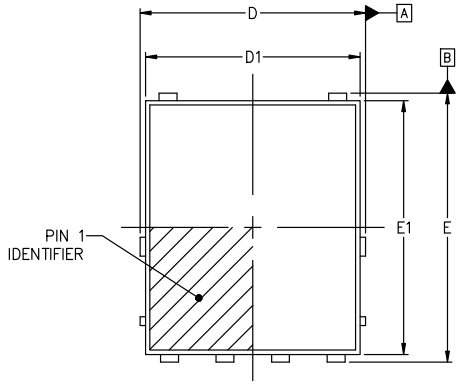

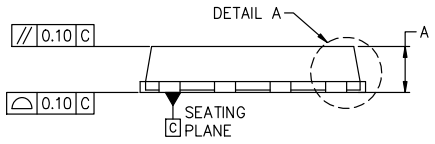

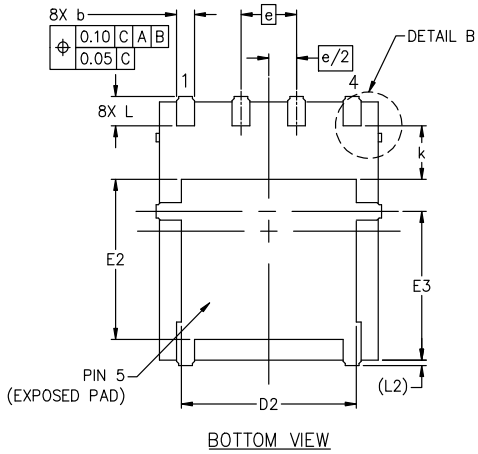






NOTES:

1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5M−2018.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
4. THIS PACKAGE CONTAINS WETTABLE FLANK DESIGN FEATURES TO AID IN FILLET FORMATION ON THE LEADS DURING MOUNTING.


DIM	MILLIMETERS		
	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.00	---	0.05
b	0.33	0.41	0.51
c	0.23	0.28	0.33
D	5.00	5.15	5.30
D1	4.70	4.90	5.10
D2	3.80	4.00	4.20
E	6.00	6.15	6.30
E1	5.70	5.90	6.10
E2	3.45	3.65	3.85
E3	3.00	3.40	3.80
e	1.27 BSC		
k	1.20	1.35	1.50
L	0.51	0.57	0.71
L2	0.15 REF.		
θ	0°	6°	12°

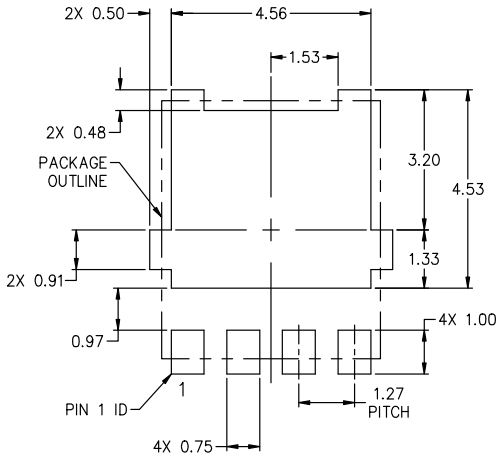

RECOMMENDED MOUNTING FOOTPRINT*

*FOR ADDITIONAL INFORMATION ON OUR Pb−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ONSEMI SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



XXXXXX = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
ZZ = Lot Traceability

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, "G" or microdot " ▪", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON26450H**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	**DFNW5 4.90x5.90x1.00, 1.27P**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

Downloaded from Arrow.com.

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

◊

Downloaded from Arrow.com.