Features

LED DRIVER

- Universal AC Input
- Constant Voltage / Constant Current Operation
- CE and UL Certified Class | LED Driver
- Active Power Factor Correction
- IP67 Design for Indoor and Outdoor Use
- Cooling by Free Air Convection

34-48

3.2

ming by Free 7th Convection

90%

Selection Guide Part **CV** Mode **CC Mode** Efficiency Constant Voltage Current Range DC Voltage Range Constant Current (230VAC) (V) (A) (A) (typ.) RACD150-12 12 0-11 9-12 11 88% RACD150-24 24 0-6.3 14-24 6.3 90% RACD150-36 36 0-4.2 26-36 4.2 90%

0-3.2

Specifications

RACD150-48

48

Input Voltage Range		90-305 VAC or 127-430VDC
Input Frequency Range		47-63Hz.
Power Factor	Full Load, 115VAC	>0.98
	Full Load, 230VAC	>0.95
	Full Load, 277VAC	>0.94
THD	Full Load, 115VAC	8% max.
AC Current	115VAC	2A max.
	230VAC	1A max.
Input / Output Isolation		3.75kVAC / 1minute
Input / Case Isolation		1.8kVAC / 1minute
Output / Case Isolation		0.5kVAC / 1minute
Leakage Current	230VAC	<0.5mA
Current Tolerance		±5%
Voltage Tolerance		-1% to 5%
Start-up Time	115VAC	1.0s
(@ Full Load)	230VAC / 277VAC	0.8s
Ripple & Noise	48V Version	200mV max.
Tippio & Noico	others	150mV max.
(with 20MHz bandwidth & 47)		
Over Current Protection	95%-105% rated current	Auto-Recovery
Short Circuit Protection	00,0100,000,000	Hiccup Mode
Over Voltage Protection	12V	12.5V typ.
Latch Mode	24V	24.5V typ.
(Power off to recover)	36V	36.5V typ.
(i ovvoi on to robovoi)	48V	48.5V typ.
Over Temperature Protection	101	Tcase 95°C ±10°C
Operating Temperature Range	without derating	-30°C to +50°C (see graph)
(free air convection, according	•	90°C max.
Operation Humidity	case remperature	20%-90% RH Non-Condensing
Storage Temperature		-40°C to +80°C
Storage Humidity		10%-90% RH
Vibration		10-500Hz, 2G, 60 Min. along X, Y and Z
IP Rating		IP67
Safety Standards	UL/cUL LED Lighting Safety (E34	
oaiviy olanuarus	CE LVD Directive, Safety	EN61347-2-13
	CB Report: 12CA6	
EMC Standards	EMC Compatibility	EN55015
EIVIC Standards	LINIO Compatibility	FCC, Part 15
	Harmonic Current	EN61000-3-2 Class C (≥75% load)
	Harmonic Guirent	EN61000-3-2 class c (27.3 % load)
	EMC Immunity	
Dimension	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 11 222*68*39mm
Weight MTBF	uning MIL LIDDI/ 047E (0E90)	1080g 200 x 10 ³ hours
	using MIL-HDBK-217F (25°C)	
Design Lifetime		70 x 10 ³ hours

with 5 Year Warranty

LIGHTLINE

AC/DC-Converter

150 Watt Single Output



UL 8750 Certified EN 61347 Certified

RACD150

Note:

The use of a circuit breaker with C-characteristic is recommended.


All LED Drivers may not be used without a load. They must be switched on the primary side only. Noncompliance may damage the LED or reduce its lifetime.


Refer to Application Notes

LIGHTLINE AC/DC-Converter

RACD150 Series


Derating Curves





Typical Characteristics


Constant Voltage / Constant Current Curve

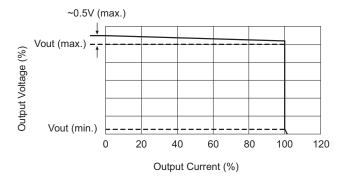

Maximum Number of LED drivers per circuit breakers

Condition	Circuit Breaker	Circuit Breaker Current				
	Тур	10A	16A	20A	25A	
115VAC, 10hm 90° phase angle	С	5	8	9	12	
230VAC, 10hm 90° phase angle	D	4	7	0	9	
	В	5	13	8 16	19	
277VAC, 10hm 90° phase angle	В	5	8	9	11	
	С	9	15	18	21	

Package Style and Pinning

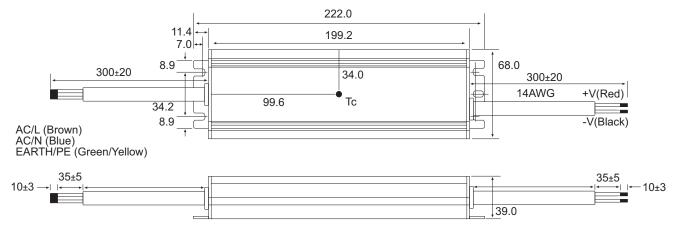

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.