

Part Number: 5678110821

78 POT CORE SET

**Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.**

Pot cores can be supplied with the center post gapped to a mechanical dimension or an  $A_L$  value.


[Catalog Drawing](#)

[3D Model](#)

Weight indicated is per pair or set.

Weight: 1.9.000 (g)

| Dim | mm   | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A   | 11.1 | ±0.20  | 0.437        | —          |
| B   | 3.3  | ±0.10  | 0.13         | —          |
| C   | 6.8  | ±0.25  | 0.268        | —          |
| D   | 2.3  | ±0.15  | 0.091        | —          |
| E   | 9.2  | ±0.20  | 0.362        | —          |
| F   | 4.6  | ±0.10  | 0.181        | —          |
| G   | 2.2  | ±0.30  | 0.087        | —          |

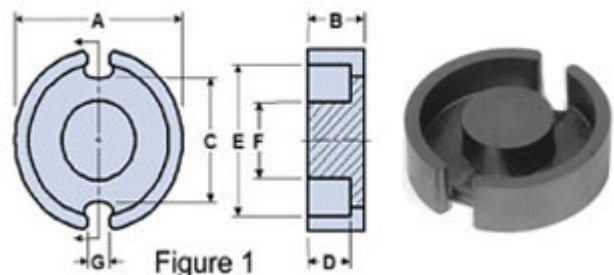

## Chart Legend

$\Sigma l/A$  : Core Constant,  $l_e$  : Effective Path Length,  $A_e$  : Effective Cross-Sectional Area,  $V_e$  : Effective Core Volume

$A_L$  : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

| Electrical Properties            |           |
|----------------------------------|-----------|
| $A_L$ (nH)                       | 1680 ±25% |
| $A_e$ (cm <sup>2</sup> )         | 0.173     |
| $\Sigma l/A$ (cm <sup>-1</sup> ) | 9.5       |

| Electrical Properties   |       |
|-------------------------|-------|
| $l_e(\text{cm})$        | 1.65  |
| $V_e(\text{cm}^3)$      | 0.284 |
| $A_{\min}(\text{cm}^2)$ | 0.145 |

$A_L$  value is measured at 1 kHz,  $B < 10$  gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)