


The Best Seller G2R

- 1General purpose power Relays of single-pole10 A and double-pole 5 A.
- Safety-oriented design with dielectric strength of 5,000 V between coil and contacts, and surge resistance of 10,000 V.
- AC and DC types are both available for operational coils.

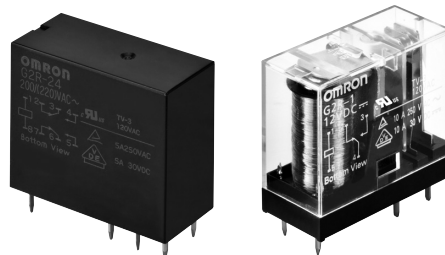

Model Number Legend

G2R-□-□□□□-□□
1 2 3 4 5 6 7

1. Relay Function

None: Single-side stable
K : Double-winding latching

2. Number of poles

1: 1-pole
2: 2-pole

3. Contact Form

None: NO/NC
A : NO

4. Contact Type

None: Single
Z : Bifurcated contact

5. Enclosure rating

None: Flux protection (T-type is an enclosed relay)
4 : Fully sealed

6. Terminal Shape

None: PCB terminals
T : Quick-connect (upper bracket mounting #187)

7. Classification

None: Standard
E : High-capacity
H : High-sensitivity
U : For ultrasonically cleanable
Z : Full-wave rectifier

Application Examples

FA equipment, BA equipment, Industrial equipment, Power supply

G
2
R

Model Configuration

Terminal Shape		Classification	Number of poles		1-pole		2-pole		Minimum packing unit
			Enclosure rating	Contact form	SPST-NO (1a)	SPDT (1c)	DPST-NO (2a)	DPDT (2c)	
PCB terminals	Standard	Flux protection	AC	G2R-1A	G2R-1	G2R-2A	G2R-2	100 pcs/tray	
			DC						
		Fully sealed	AC	G2R-1A4	G2R-14	G2R-2A4	G2R-24		
			DC						
	Bifurcated contact	Flux protection	DC	G2R-1AZ	G2R-1Z	—	—	50 pcs/tray	
		Fully sealed		G2R-1AZ4	G2R-1Z4	—	—		
	High-capacity	Flux protection	AC	G2R-1A-E	G2R-1-E	—	—	100 pcs/tray	
			DC						
High-sensitivity	Flux protection	DC	G2R-1A-H	G2R-1-H	G2R-2A-H	G2R-2-H	50 pcs/tray		
Double-winding latching	Flux protection	DC	G2RK-1A	G2RK-1	G2RK-2A	G2RK-2			
Quick-connect	Standard	Unsealed	AC	G2R-1A-T	G2R-1-T	—	—	10 pcs/box	
			DC						

Note 1. Full-wave rectifier and supersonic cleaner compatible models are also available. Refer to page 3.

Note 2. Sockets for PCB terminal models are not provided.

Ordering Information

PCB Terminal Models

Classification	Enclosure rating	Number of poles Contact form	1-pole		2-pole	
			Model	Rated coil voltage	Model	Rated coil voltage
Standard	Flux protection	NO	G2R-1A	12, 24, 100/(110) VAC	G2R-2A	12, 24, 100/(110) VAC
				200/(220) VAC		200/(220) VAC
				5, 6, 12, 24, 48 VDC		5, 6, 12, 24, 48 VDC
				100 VDC		100 VDC
		NO/NC	G2R-1	12, 24, 100/(110) VAC	G2R-2	12, 24, 100/(110) VAC
				200/(220) VAC		200/(220) VAC
				5, 6, 12, 24, 48 VDC		5, 6, 12, 24, 48 VDC
				100 VDC		100 VDC
	Fully sealed	NO	G2R-1A4	12, 24, 100/(110) VAC	G2R-2A4	12, 24, 100/(110) VAC
				200/(220) VAC		200/(220) VAC
				5, 6, 12, 24, 48 VDC		5, 6, 12, 24, 48 VDC
				100 VDC		100 VDC
		NO/NC	G2R-14	12, 24, 100/(110) VAC	G2R-24	12, 24, 100/(110) VAC
				200/(220) VAC		200/(220) VAC
				5, 6, 12, 24, 48 VDC		5, 6, 12, 24, 48 VDC
				100 VDC		100 VDC
High-sensitivity	Flux protection	NO	G2R-1A-H	5, 6, 12, 24, 48 VDC	G2R-2A-H	5, 6, 12, 24, 48 VDC
NO/NC		G2R-1-H	5, 6, 12, 24, 48 VDC	G2R-2-H	5, 6, 12, 24, 48 VDC	
Double-winding latching		NO	G2RK-1A	5, 6, 12, 24 VDC	G2RK-2A	5, 12, 24 VDC
NO/NC		G2RK-1	5, 6, 12, 24 VDC	G2RK-2	5, 6, 12, 24 VDC	
Bifurcated contact	Flux protection	NO	G2R-1AZ	12, 24, 48 VDC	—	—
				100 VDC		
		NO/NC	G2R-1Z	5, 6, 12, 24, 48 VDC		
				100 VDC		
	Fully sealed	NO	G2R-1AZ4	5, 12, 24, 48 VDC	—	—
				100 VDC		
		NO/NC	G2R-1Z4	5, 12, 24, 48 VDC		
				100 VDC		
High-capacity	Flux protection	NO	G2R-1A-E	12, 24, 100/(110) VAC	—	—
				200/(220) VAC		
				5, 6, 12, 24, 48 VDC		
				100 VDC		
		NO/NC	G2R-1-E	12, 24, 100/(110) VAC	—	—
				200/(220) VAC		
				5, 6, 12, 24, 48 VDC		
				100 VDC		

Note: When ordering, add the rated coil voltage to the model number.
Example: G2R-1A AC12
 └─ Rated coil voltage
However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VAC.

● Quick-connect Terminal (#187)

Classification	Enclosure rating	Number of poles Contact form	1-pole	
			Model	Rated coil voltage
Standard	Unsealed	NO	G2R-1A-T	12, 24, 100/(110) VAC
				200/(220) VAC
				5, 6, 12, 24, 48 VDC
				100 VDC
		NO/NC	G2R-1-T	12, 24, 100/(110) VAC
				200/(220) VAC
				5, 6, 12, 24, 48 VDC
				100 VDC

● Full-wave Rectifier

Classification	Enclosure rating	Number of poles Contact form	1-pole		2-pole	
			Model	Rated coil voltage	Model	Rated coil voltage
Standard	Flux protection	NO	G2R-1A-Z	5, 12, 24 VDC	G2R-2A-Z	5, 6, 12, 24, 48 VDC
				100 VDC		100 VDC
		NO/NC	G2R-1-Z	5, 12, 24, 48 VDC	G2R-2-Z	12, 24, 48 VDC
				100 VDC		100 VDC
	Fully sealed	NO	G2R-1A4-Z	5, 12, 48 VDC	G2R-2A4-Z	24, 48 VDC
				100 VDC		100 VDC
		NO/NC	G2R-14-Z	5, 12, 24, 48 VDC	G2R-24-Z	5, 12, 24 VDC
				100 VDC		100 VDC
High-capacity	Flux protection	NO	G2R-1A-EZ	5, 12, 24 VDC	—	
				100 VDC		
		NO/NC	G2R-1-EZ	12, 24, 48 VDC		

● For Ultrasonically Cleanable

Classification	Enclosure rating	Number of poles Contact form	1-pole		2-pole	
			Model	Rated coil voltage	Model	Rated coil voltage
Standard	Fully sealed	NO	G2R-1A4-U	12, 24, 100/(110) VAC	G2R-2A4-U	100/(110) VAC
				200/(220) VAC		—
				5, 6, 12, 24, 48 VDC		5, 12, 24 VDC
		NO/NC	G2R-14-U	100/(110) VAC 200/(220) VAC	G2R-24-U	24, 100/(110) VAC 200/(220) VAC
				5, 12, 24, 48 VDC		5, 12, 24, 48 VDC
				100 VDC		100 VDC

Note: When ordering, add the rated coil voltage to the model number.

Example: G2R-1A-T AC12

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VAC.

■ Ratings

● Coil

Item		Rated current (mA)		Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (VA, W)
Classification	Rated voltage	50 Hz	60 Hz					
• Standard • Fully sealed • High-capacity	12 VAC	93	75	65	80% max.	30% min.	140% (at 23°C)	Approx. 0.9 (60 Hz)
	24 VAC	46.5	37.5	260				
	100/(110) VAC	11	9/(10.6)	4,600				
	200/(220) VAC	5.5	4.5/(5.3)	20,200				
• Standard • High-capacity • Bifurcated contact • Fully sealed	5 VDC	106		47	70% max.	15% min.	170% (at 23°C)	Approx. 0.53
	6 VDC	88.2		68				
	12 VDC	43.6		275				
	24 VDC	21.8		1,100				
	48 VDC	11.5		4,170				
	100 VDC	5.3		18,870				
• High-sensitivity	5 VDC	71.4		70	70% max.	15% min.	170% (at 23°C)	Approx. 0.36
	6 VDC	60		100				
	12 VDC	30		400				
	24 VDC	15		1,600				
	48 VDC	7.5		6,400				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of +15%/-20% (AC rated current) or ±10% (DC coil resistance).
2. AC coil resistances shown above are only reference values.
3. The operating characteristics are measured at a coil temperature of 23°C.
4. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

● Coil: Quick-connect

Item	Rated current (mA)		Coil resistance (Ω)	Coil inductance (H)		Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (VA, W)
Rated voltage	50 Hz	60 Hz		Armature OFF	Armature ON	% of rated voltage			
12 VAC	93	75	65	0.19	0.39	80% max.	30% min.	110%	Approx. 0.9 (60 Hz)
24 VAC	43.5	37.4	253	0.81	1.55				
100/(110) VAC	11	9/(10.6)	4,655	13.34	26.84				
200/(220) VAC	5.5	4.5/(5.3)	20,200	51.3	102.0				
5 VDC	106		47	0.2	0.39	70% max.	15% min.	110%	Approx. 0.53
6 VDC	87		69	0.25	0.48				
12 VDC	43.2		278	0.98	2.35				
24 VDC	21.6		1,113	3.60	8.25				
48 VDC	11.4		4,220	15.2	29.82				
100 VDC	5.2		19,096	67.2	93.2				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of +15%/-20% (AC rated current) or ±10% (DC coil resistance).
2. AC coil resistances shown above are only reference values.
3. The operating characteristics are measured at a coil temperature of 23°C.
4. The maximum voltage is the highest voltage that can be imposed on the relay coil.

● Coil: Double-winding Latching Relays

Item	Set Coil		Reset coil		Must set voltage (V)	Must reset voltage (V)	Max. voltage (V)	Power consumption	
	Rated current (mA)	Coil resistance (Ω)	Rated current (mA)	Coil resistance (Ω)	% of rated voltage			Set Coil (mW)	Reset coil (mW)
5 VDC	167	30	119	42	70% max.	70% max.	140% (at 23°C)	Approx. 850	Approx. 600
6 VDC	138	43.5	100	60					
12 VDC	70.6	170	50	240					
24 VDC	34.6	694	25	960					

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. The operating characteristics are measured at a coil temperature of 23°C.
3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

● Contacts: Flux Protection Type

Classification Number of poles Load Item	Standard type Quick-connect Terminal (1-pole type)				High-capacity type		Bifurcated contact type		High-sensitivity type			
	1-pole		2-pole		1-pole		2-pole		1-pole		2-pole	
	Resistive load	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load	Inductive load (cosφ = 0.4; L/R = 7 ms)
Contact type	Single				Single		Bifurcated		Single			
Contact material	Ag-alloy (Cd free)											
Rated load	10 A at 250 VAC 10 A at 30 VDC	7.5 A at 250 VAC 5 A at 30 VDC	5 A at 250 VAC 5 A at 30 VDC	2 A at 250 VAC 3 A at 30 VDC	16 A at 250 VAC 16 A at 30 VDC	8 A at 250 VAC 8 A at 30 VDC	5 A at 250 VAC 5 A at 30 VDC	2 A at 250 VAC 3 A at 30 VDC	5 A at 250 VAC 5 A at 30 VDC	2 A at 250 VAC 3 A at 30 VDC	3 A at 250 VAC 3 A at 30 VDC	1 A at 250 VAC 1.5 A at 30 VDC
Rated carry current	10 A		5 A		16 A		5 A		5 A		3 A	
Max. switching voltage	380 VAC, 125 VDC *2				380 VAC, 125 VDC				380 VAC, 125 VDC			
Max. switching current	10 A		5 A		16 A		5 A		5 A		3 A	
Failure rate (P level) (reference value) *1	100 mA at 5 VDC		10 mA at 5 VDC		100 mA at 5 VDC		1 mA at 5 VDC		100 mA at 5 VDC		10 mA at 5 VDC	

*1. This value was measured at a switching frequency of 120 operations/min.

*2. The maximum switching voltage for the quick-connect terminal (1-pole type) is 440 VAC and 125 VDC.

● Contacts: Fully Sealed Type

Classification Number of poles Load Item	Standard type (Single contact type)				Bifurcated contact type	
	1-pole		2-pole		1-pole	
	Resistive load (cosφ = 1)	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load (cosφ = 1)	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load (cosφ = 1)	Inductive load (cosφ = 0.4; L/R = 7 ms)
Contact type	Single		Single		Bifurcated	
Contact material	Ag-alloy (Cd free)					
Rated load	8 A at 250 VAC 8 A at 30 VDC	6 A at 250 VAC 4 A at 30 VDC	4 A at 250 VAC 4 A at 30 VDC	1.5 A at 250 VAC 2.5 A at 30 VDC	5 A at 250 VAC 5 A at 30 VDC	2 A at 250 VAC 3 A at 30 VDC
Rated carry current	8 A		4 A		5 A	
Max. switching voltage	380 VAC, 125 VDC		380 VAC, 125 VDC		380 VAC, 125 VDC	
Max. switching current	8 A		4 A		5 A	
Failure rate (P level) (reference value) *	100 mA at 5 VDC		10 mA at 5 VDC		1 mA at 5 VDC	

* This value was measured at a switching frequency of 120 operations/min.

● Contacts: Latching Type

Item	Number of poles	1-pole		2-pole	
	Load	Resistive load (cosφ = 1)	Inductive load (cosφ = 0.4; L/R = 7 ms)	Resistive load (cosφ = 1)	Inductive load (cosφ = 0.4; L/R = 7 ms)
Contact type		Single		Single	
Contact material		Ag-alloy (Cd free)			
Rated load		5 A at 250 VAC 5 A at 30 VDC	3.5 A at 250 VAC 2.5 A at 30 VDC	3 A at 250 VAC 3 A at 30 VDC	1.5 A at 250 VAC 2 A at 30 VDC
Rated carry current		5 A		3 A	
Max. switching voltage		380 VAC, 125 VDC		380 VAC, 125 VDC	
Max. switching current		5 A		3 A	
Failure rate (P level) (reference value) *		100 mA at 5 VDC		10 mA at 5 VDC	

* This value was measured at a switching frequency of 120 operations/min.

Characteristics

Standard Relays

Item		Number of poles	1-pole	2-pole
Contact resistance *1			30 mΩ max.	50 mΩ max.
Operate time *2			15 ms max.	
Release time *2			AC: 10 ms max.; DC: 5 ms max.	
Max. operating frequency	Mechanical		18,000 operations/hr	
	Electrical		1,800 operations/hr	
Insulation resistance *3			1,000 MΩ min.	
Dielectric strength	Between coil and contacts		5,000 VAC, 50/60 Hz for 1 min	
	Between contacts of different polarity		-	3,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity		1,000 VAC, 50/60 Hz for 1 min	
Insulation distance	Between coil and contacts		Clearance: 8 mm, Creepage: 8 mm	
Vibration resistance	Destruction		10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)	
	Malfunction		10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)	
Shock resistance	Destruction		1,000 m/s ²	
	Malfunction		200 m/s ² when energized; 100m/s ² when no energized	
Durability	Mechanical		AC coil: 10,000,000 operations min.; DC coil: 20,000,000 operations min. (at 18,000 operations/hr)	
	Electrical		100,000 operations min. (at 1,800 operations/hr under rated load)	
Ambient operating temperature			-40°C to 70°C (with no icing)	
Ambient operating humidity			5% to 85%	
Weight			Approx. 17 g (Approx. 20 g *4)	

Note: The values here are initial values.
*1. Measurement conditions: 5 VDC, 1 A, voltage-drop method.
*2. Measurement conditions: Rated operating voltage applied, not including contact bounce.
*3. Measurement conditions: The insulation resistance was measured with a 500 VDC megohmmeter at the same locations as the dielectric strength was measured.
*4. Value for quick-connect terminals.

Double-winding Latching Relays


Item		Number of poles	1-pole	2-pole
Contact resistance *1			30 mΩ max.	50 mΩ max.
Set	Time *2		20 ms max.	
	Min. set pulse width *3		30 ms	
Reset	Time *2		20 ms max.	
	Min. reset pulse width *3		30 ms	
Max. operating frequency	Mechanical		18,000 operations/hr	
	Electrical		1,800 operations/hr	
Insulation resistance *4			1,000 MΩ min.	
Dielectric strength	Between coil and contacts		5,000 VAC, 50/60 Hz for 1 min	
	Between contacts of different polarity		-	3,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity		1,000 VAC, 50/60 Hz for 1 min	
	Between set and reset coils		1,000 VAC, 50/60 Hz for 1 min	
Insulation distance	Between coil and contacts		Clearance: 8 mm, Creepage: 8 mm	
Vibration resistance	Destruction		10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)	
	Malfunction		10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)	
Shock resistance	Destruction		1,000 m/s ²	
	Malfunction		Set: 500m/s ² Armature OFF Reset: 200m/s ² Contact OFF	
Durability	Mechanical		10,000,000 operations min (at 18,000 operations/hr)	
	Electrical		100,000 operations min. (at 1,800 operations/hr under rated load)	
Ambient operating temperature			-40°C to 70°C (with no icing or condensation)	
Ambient operating humidity			5% to 85%	
Weight			Approx. 17 g	

Note: The values here are initial values.
*1. Measurement conditions: 5 VDC, 1 A, voltage-drop method.
*2. Measurement conditions: Rated operating voltage applied, not including contact bounce.
*3. Measurement conditions: Rated operating voltage applied.
*4. Measurement conditions: The insulation resistance was measured with a 500 VDC megohmmeter at the same locations as the dielectric strength was measured.


Engineering Data

Maximum Switching Capacity


Flux Protection/Plug-in Relays
G2R-1, G2R-1A, G2R-1-T, G2R-1A-T

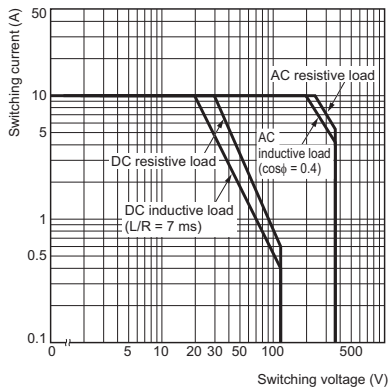


G2R-1-E, G2R-1A-E

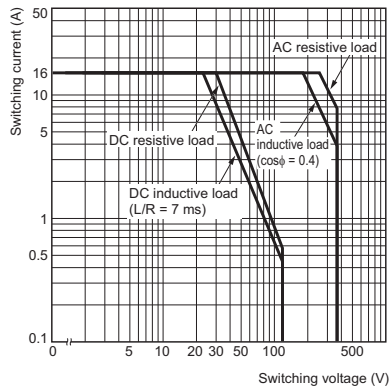


G2R-1Z, G2R-1AZ

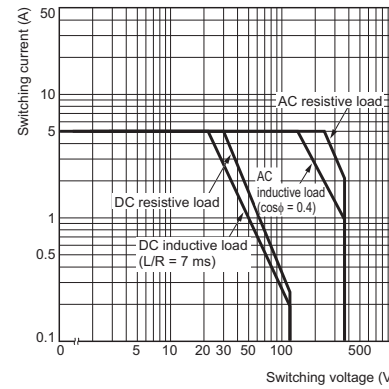


G2R-1-H, G2R-1A-H, G2R-2, G2R-2A

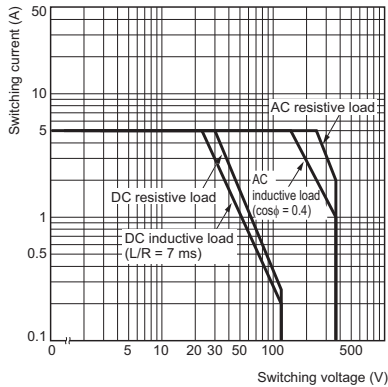


G2R-2-H, G2R-2A-H

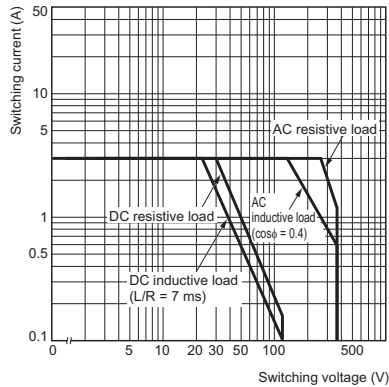


G2RK-1A, G2RK-1

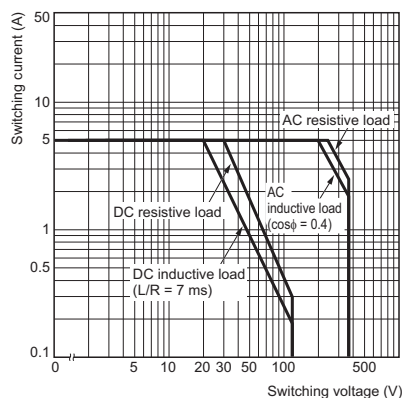


G2RK-2A, G2RK-2

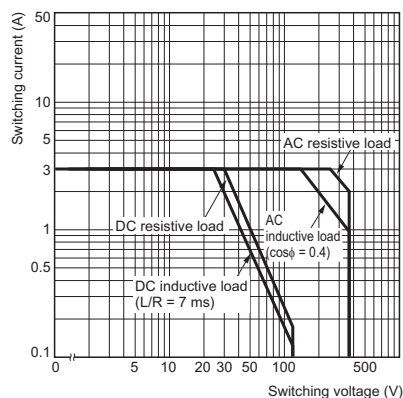


Fully Sealed Relays
G2R-14, G2R-1A4

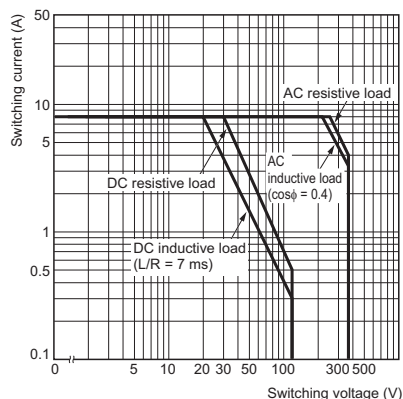

G2R-24, G2R-2A4

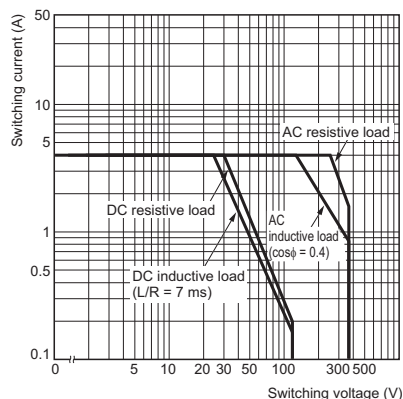


G2R-1Z4, G2R-1AZ4

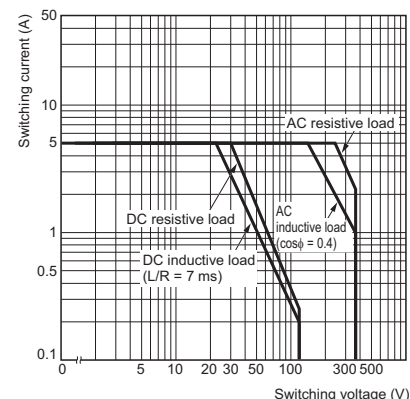


● Durability


Flux Protection/Plug-in Relays
G2R-1, G2R-1A, G2R-1-T, G2R-1A-T

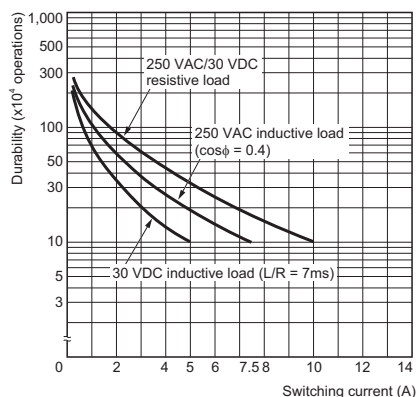


G2R-1-E, G2R-1A-E

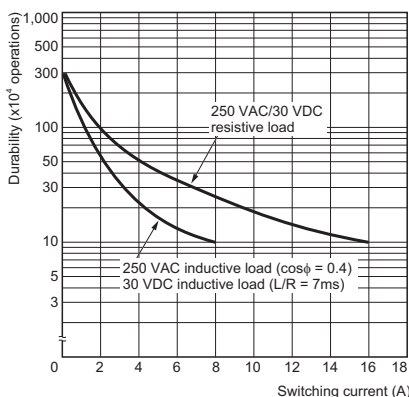


G2R-1Z, G2R-1AZ

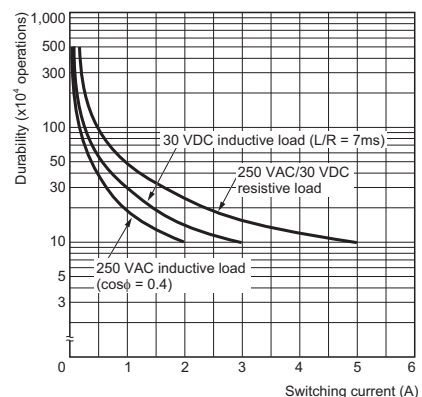


G2R-1-H, G2R-1A-H, G2R-2, G2R-2A

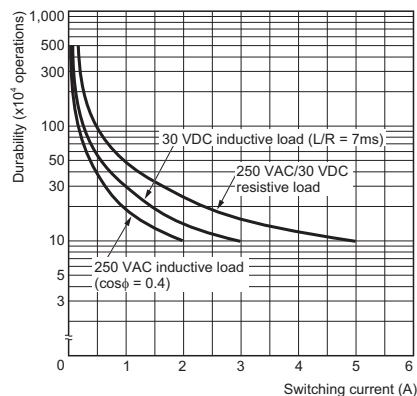


G2R-2-H, G2R-2A-H

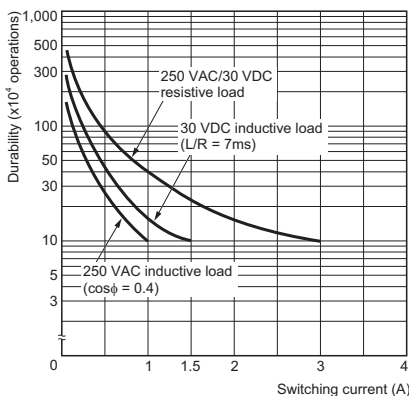

G2RK-1A, G2RK-1

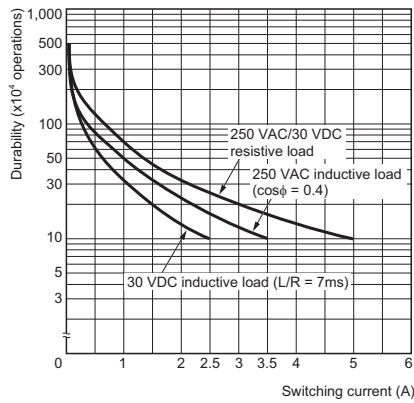


G2RK-2A, G2RK-2

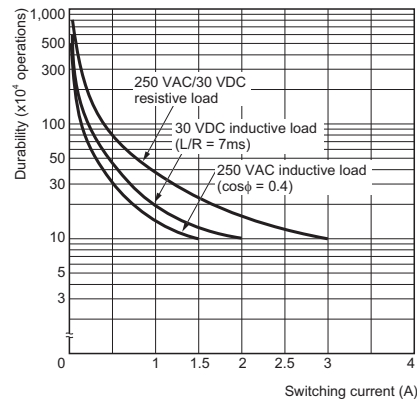


Fully Sealed Relays


G2R-14, G2R-1A4

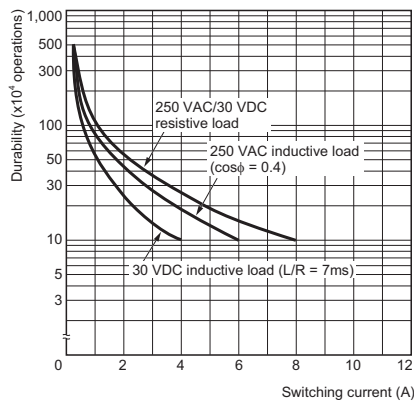


G2R-24, G2R-2A4

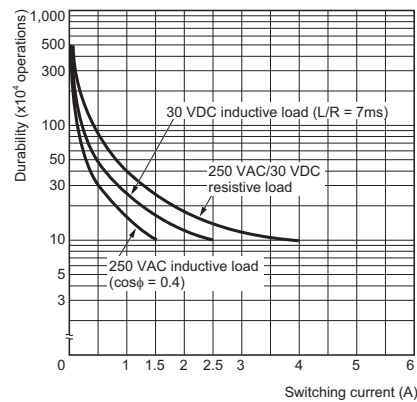

G2R-1Z4, G2R-1AZ4

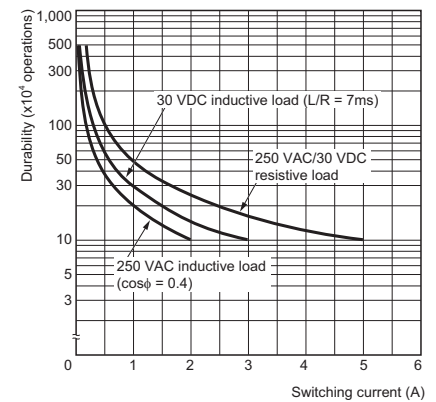


● Ambient Temperature vs. Maximum Coil Voltage

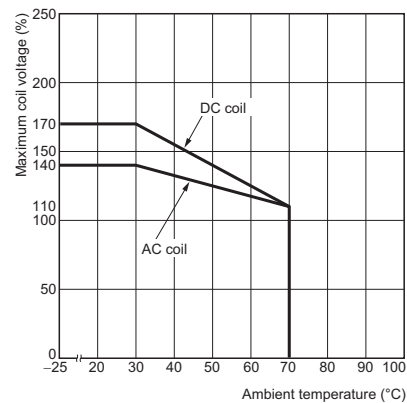


Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

● Ambient Temperature vs. Must Operate and Must Release Voltage

G2R-1

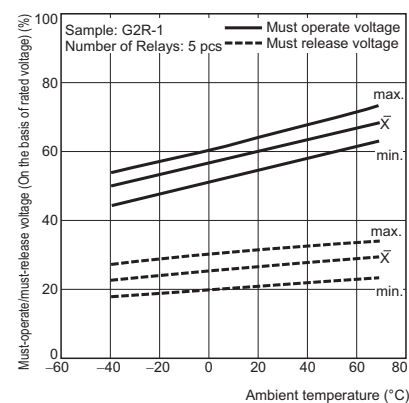


G2R-2

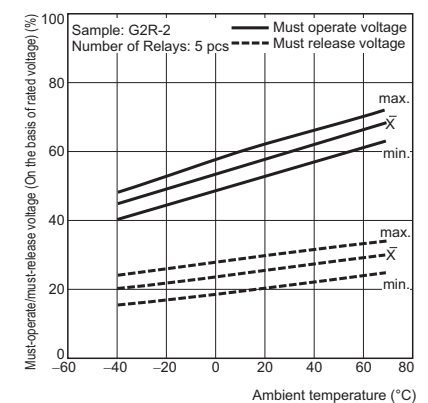


● Shock Malfunction

G2R-1 Number of Relays: 5 pcs

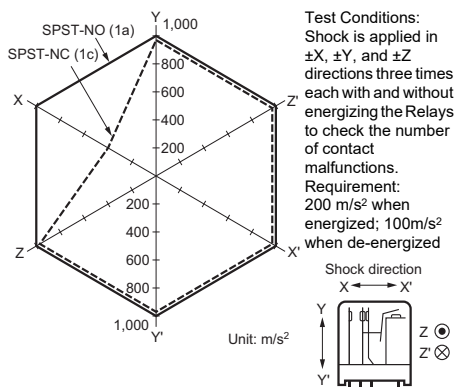


G2R-2 Number of Relays: 5 pcs

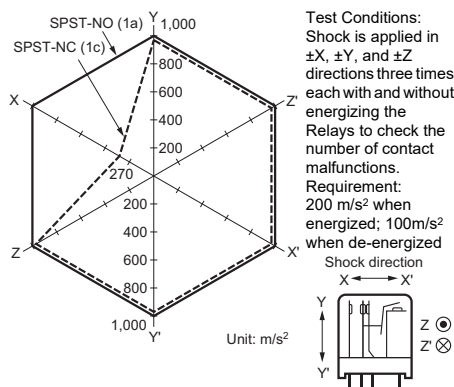

● Keep-power decrement with time

G2RK-1

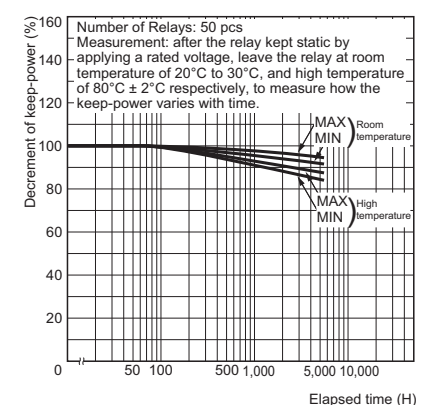

■ Dimensions

CAD Data marked products, 2D drawings and 3D CAD models are available.
For CAD information, please visit our website, which is noted on the last page.


Relays with PCB Terminals

(SPDT (1c) Relays)


G2R-1(-Z)

G2R-1Z

G2R-1-H




This illustration is the G2R-1 model.

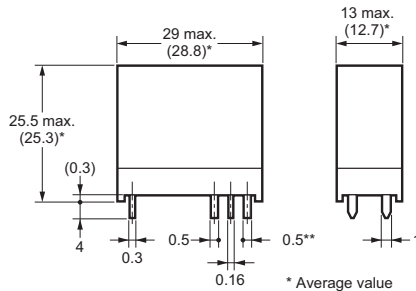

PCB Mounting Holes

(BOTTOM VIEW)


Tolerance: ± 0.1 mm

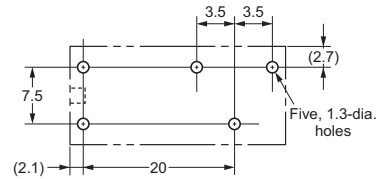

Terminal Arrangement/

Internal Connections

(BOTTOM VIEW)



CAD Data


Relays with PCB Terminals

(SPST-NO (1a) Relays)


G2R-1A(-Z)

G2R-1AZ

G2R-1A-H




This illustration is the G2R-1A model.

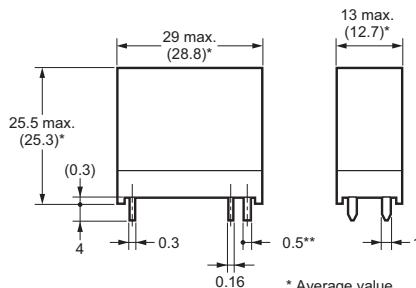

PCB Mounting Holes

(BOTTOM VIEW)


Tolerance: ± 0.1 mm

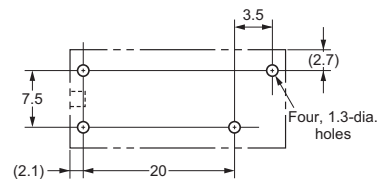

Terminal Arrangement/

Internal Connections

(BOTTOM VIEW)




CAD Data


Relays with PCB Terminals

(SPDT (1c) /High-capacity Relays)

G2R-1-E(Z)




This illustration is the G2R-1-E model.

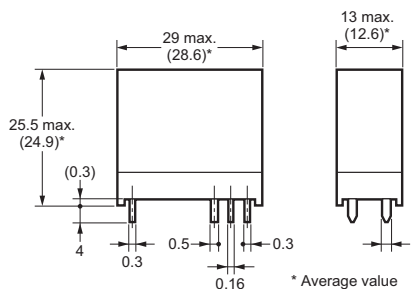

PCB Mounting Holes

(BOTTOM VIEW)


Tolerance: ± 0.1 mm

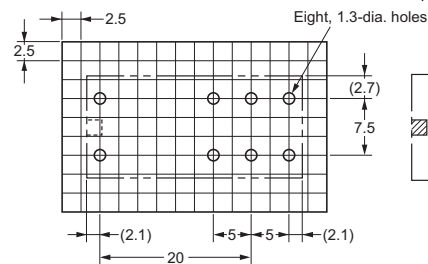

Terminal Arrangement/

Internal Connections

(BOTTOM VIEW)




CAD Data


Relays with PCB Terminals

(SPST-NO (1a)/High-capacity Relays)

G2R-1A-E(Z)




This illustration is the G2R-1A-E model.

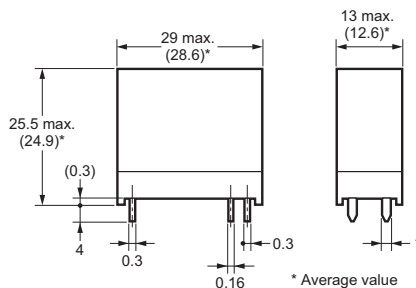

PCB Mounting Holes

(BOTTOM VIEW)


Tolerance: ± 0.1 mm

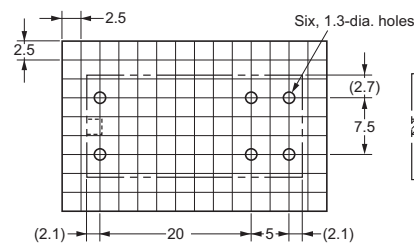

Terminal Arrangement/

Internal Connections


(BOTTOM VIEW)




CAD Data

Note: Orientation marks are indicated as follows:


Relays with PCB Terminals (SPDT (1c) Relays) G2R-14(-Z)(-U) G2R-1Z4

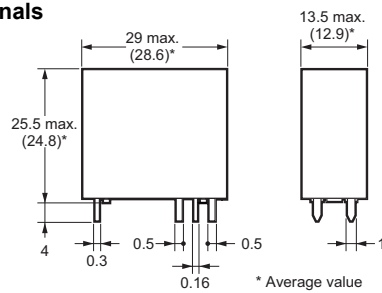

PCB Mounting Holes (BOTTOM VIEW) Tolerance: ± 0.1 mm

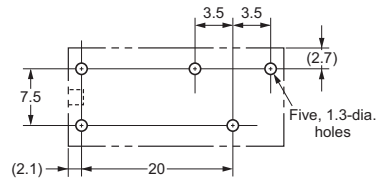


Terminal Arrangement/ Internal Connections (BOTTOM VIEW)




[CAD Data](#)


Relays with PCB Terminals (SPST-NO (1a) Relays) G2R-1A4(-Z)(-U) G2R-1AZ4

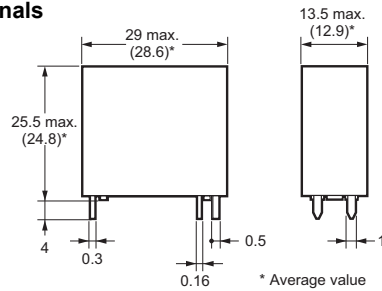

PCB Mounting Holes (BOTTOM VIEW) Tolerance: ± 0.1 mm


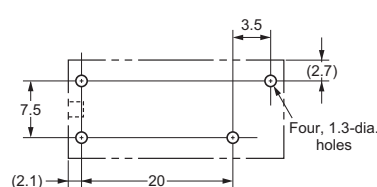


Terminal Arrangement/ Internal Connections (BOTTOM VIEW)




[CAD Data](#)


Double-winding Latching Relays with PCB Terminals (SPDT (1c) Relays) G2RK-1

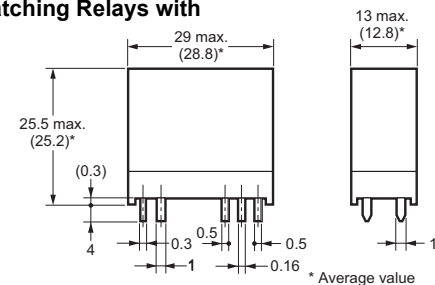

PCB Mounting Holes (BOTTOM VIEW) Tolerance: ± 0.1 mm


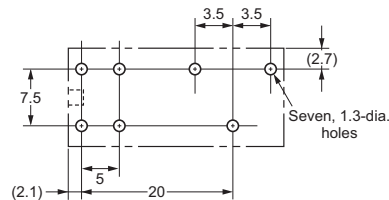


Terminal Arrangement/ Internal Connections (BOTTOM VIEW)




[CAD Data](#)


Double-winding Latching Relays with PCB Terminals (SPST-NO (1a) Relays) G2RK-1A

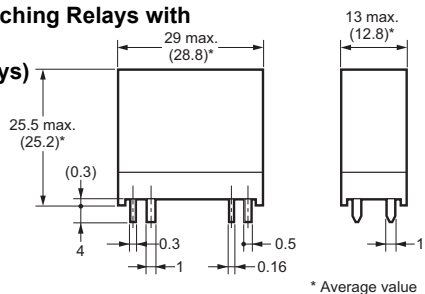

PCB Mounting Holes (BOTTOM VIEW) Tolerance: ± 0.1 mm


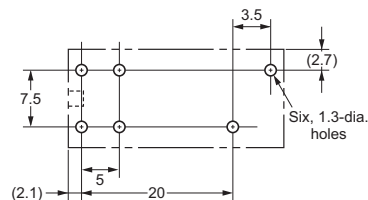


Terminal Arrangement/ Internal Connections (BOTTOM VIEW)




[CAD Data](#)


Double-winding Latching Relays with PCB Terminals (DPDT (2c) Relays) G2RK-2

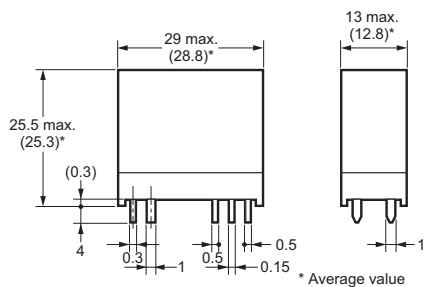

PCB Mounting Holes (BOTTOM VIEW) Tolerance: ± 0.1 mm


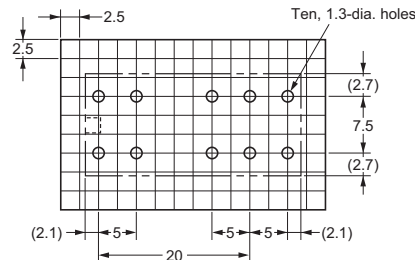


Terminal Arrangement/ Internal Connections (BOTTOM VIEW)




[CAD Data](#)


Double-winding Latching Relays with PCB Terminals (DPST-NO (2a) Relays) G2RK-2A

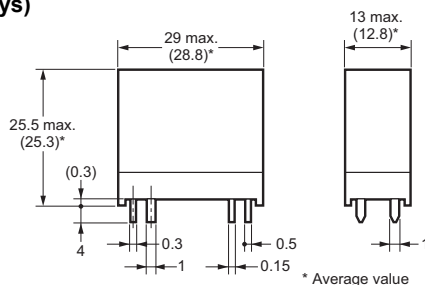

PCB Mounting Holes (BOTTOM VIEW) Tolerance: ± 0.1 mm

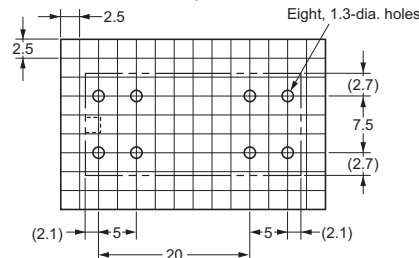

Terminal Arrangement/ Internal Connections (BOTTOM VIEW)



[CAD Data](#)

Note: Orientation marks are indicated as follows:

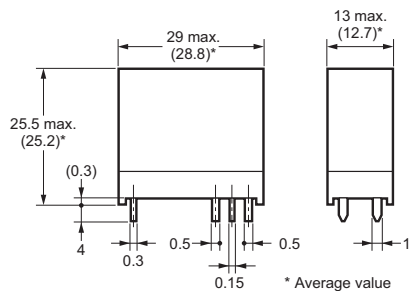


Figure 10-10 shows a rectangular plate with dimensions and hole locations. The plate is 20 units wide and 10 units high. There are eight 1.3-dia. holes arranged in two rows of four. The top row of holes is 2.7 units from the top edge, and the bottom row is 7.5 units from the bottom edge. The holes are spaced 5 units apart. The left edge of the plate is 2.5 units from the left edge of the hole pattern, and the right edge is 2.1 units from the right edge of the hole pattern. The top edge of the plate is 2.5 units from the top edge of the hole pattern.

(No coil polarity)

CAD Data

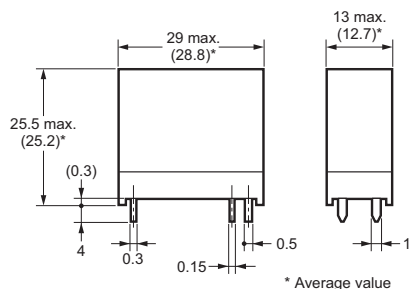


Figure 10 is a technical drawing of a rectangular plate with a grid. The plate has a total width of 20 units and a total height of 10 units. There are six holes, each 1.3 units in diameter, arranged in two rows of three. The top row of holes is 2.7 units from the top edge. The bottom row of holes is 7.5 units from the bottom edge. The holes are spaced 5 units apart horizontally. The left edge of the plate is 2.5 units from the left edge of the grid. The right edge of the plate is 2.1 units from the right edge of the grid. The top edge of the plate is 2.5 units from the top edge of the grid. The bottom edge of the plate is 2.1 units from the bottom edge of the grid.

(No coil polarity)

CAD Data


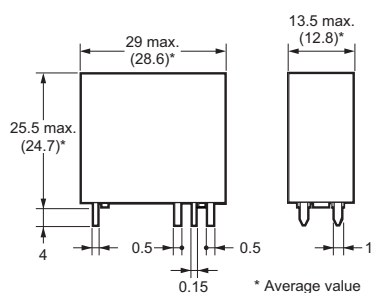


Figure 10-10 shows a technical drawing of a rectangular plate with dimensions and hole locations. The plate is 20 units wide and 10 units high. There are eight 1.3-dia. holes arranged in two rows of four. The top row of holes is 2.5 units from the left edge and 2.7 units from the top edge. The bottom row of holes is 2.5 units from the left edge and 7.5 units from the bottom edge. The distance between the two rows of holes is 5 units. The distance between the first and second hole in each row is 5 units. The distance from the right edge of the plate to the rightmost hole in each row is 2.1 units.

CAD Data


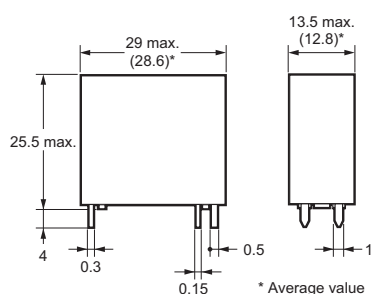


(No coil polarity)


CAD Data

Note: Orientation marks are indicated as follows:  

Relays with Quick-connect
Terminals
(SPDT (1c) Relays)
G2R-1-T

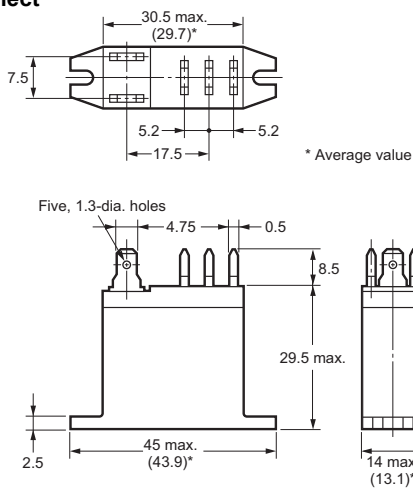


Mounting Holes
(BOTTOM VIEW)
Tolerance: ± 0.1 mm





Note: Model number of quick-connect terminal is 187.

Terminal Arrangement/
Internal Connections
(BOTTOM VIEW)




CAD Data

Relays with Quick-connect
Terminals
(SPST-NO (1a) Relays)
G2R-1A-T

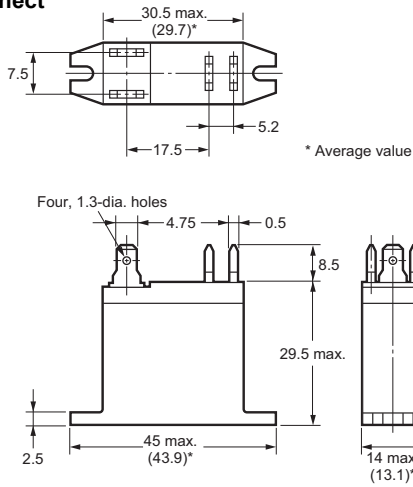


Mounting Holes
(BOTTOM VIEW)
Tolerance: ± 0.1 mm



Note: Model number of quick-connect terminal is 187.

Terminal Arrangement/
Internal Connections
(BOTTOM VIEW)



CAD Data

Note: Orientation marks are indicated as follows:

Approved Standards

- The approval rating values for overseas standards are different from the performance values determined individually. Confirm the values before use.

UL Recognized:  File No. E41643

1-pole

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G2R-1A	SPST-NO (1a)	5 to 110 VDC 12 to 220 VAC	10 A, 250 VAC (General Use) at 40°C	100,000
G2R-1A4			5 A, 277 VAC (General Use) at 40°C	6,000
G2R-1A-H				
G2R-1A-T				
G2R-1	SPDT (1c)			
G2R-14			TV-3 (N. O. only) at 40°C	25,000
G2R-1-H				
G2R-1-T				
G2R-1AZ	SPST-NO (1a)	5 to 110 VDC 12 to 220 VAC	5 A, 250 VAC (General Use) at 40°C	6,000
G2R-1AZ4			5 A, 30 VDC (Resistive) at 40°C	
G2R-1Z	SPDT (1c)			
G2R-1Z4				
G2R-1A-E	SPST-NO (1a)	5 to 110 VDC 12 to 220 VAC	16 A, 250 VAC (General Use) at 40°C	30,000
G2R-1-E	SPDT (1c)		16 A, 30 VDC (Resistive) at 40°C	6,000
			TV-3 (N. O. only) at 40°C	25,000

2-pole

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G2R-2A	DPST-NO (2a)	5 to 110 VDC 12 to 220 VAC	5 A, 250 VAC (General Use) at 40°C	6,000
G2R-2A4				
G2R-2A-H				
G2R-2	DPDT (2c)		5 A, 30 VDC (Resistive) at 40°C	100,000
G2R-24			TV-3 (N. O. only) at 40°C	25,000
G2R-24-H				

Note: Please contact us for UL contact-certified ratings.

EN/IEC, VDE Certified:  Certificate No. 40015012

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G2R-1(A)-E	1	5, 6, 12, 24, 48, 100 VDC 12, 24, 100/110, 200/220 VAC	16 A, 250 VAC (cosφ = 1.0) at 70°C	100,000
G2R-()	1	5, 6, 12, 24, 48, 100 VDC 12, 24, 100/110, 200/220 VAC	10 A, 250 VAC (cosφ = 1.0) at 40°C	
			10 A, 30 VDC (0 ms) at 40°C	
	2		5 A, 250 VAC (cosφ = 1.0) at 40°C	
			5 A, 30 VDC (0 ms) at 40°C	

EN, TÜV Certified: Registration No. R50030327

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G2R-1(A)-E	1	5 to 110 VDC 12 to 220 VAC	16 A, 250 VAC (cosφ = 1.0) at 70°C	100,000
G2R-()	1	5 to 110 VDC 12 to 220 VAC	10 A, 250 VAC (cosφ = 1.0) at 70°C	
			10 A, 30 VDC (0 ms) at 70°C	
	2	5 to 110 VDC 12 to 220 VAC	5 A, 250 VAC (cosφ = 1.0) at 40°C	
			5 A, 30 VDC (0 ms) at 40°C	


■Precautions

●Please refer to “PCB Relays Common Precautions” for correct use.

Correct Use

●Mounting

- When mounting a number of relays on a PCB, be sure to provide a minimum mounting space of 5 mm between the two juxtaposed relays as shown below.

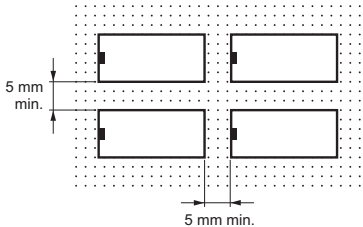

●Handling

- The terminals are compatible with Faston receptacle #187 and are suitable for positive-lock mounting. Use only Faston terminals with the specified numbers. Select leads for connecting Faston receptacles with wire diameters that are within the allowable range for the load current. Do not apply excessive force to the terminals when mounting or dismantling the Faston receptacle. Also, do not insert terminals at an angle, or insert/remove multiple terminals at the same time. Be sure to insert and remove terminals carefully one at a time.

Refer to the following table for examples of positive-lock connectors made by AMP. Contact the manufacturer directly for details on connectors including availability.

Type	Receptacle terminals	Positive housing
#187 (Width 4.75)	AMP170330-1 (170324-1) AMP170331-1 (170325-1) AMP170332-1 (170326-1)	AMP172074-1 (natural color) AMP172074-4 (yellow) AMP172074-5 (green) AMP172074-6 (blue)

Note: The numbers shown in parentheses are for air-feeding.

●Minimum Pulse Width of Double-winding Latching Relays

- The minimum pulse width shown in the table of characteristics are values measured under conditions of ambient temperature at 23°C with rated operating voltage imposed on coil. The Relay may not provide a satisfactory performance as its holding ability decreases depending on the operating circuit conditions and ambient temperature, or decreases due to degradation over time. In actual operation, impose to the coil a rated operating voltage with a pulse width that is suitable to the actual load, and reset the setting at least once a year, to correspond to the degradation over time.
- When using the Relay in a strong magnetic field environment, the magnetic body may be demagnetized due to the influence of environment, causing the Relay to malfunction.

Therefore, do not use the Relay in a strong magnetic field environment.

●Degradation over Time of Double-winding Latching Relays Holding Ability

- If a double-winding latching Relay is used left set for an extended period, changes over time will degrade the magnetic force, and the reduction in holding ability may cause the set status to be released. This is also because of the properties of semi-hard magnetic material, and the rate of degradation over time depends on the ambient environment (e.g., temperature, humidity, vibration, and presence or absence of external magnetic fields). Perform maintenance at least once a year by resetting, applying the rated voltage again, and then setting.
- Wiring High Capacity (-E) Models
- High-capacity models (-E) have a structure that connects two terminals from one contact. When designing the circuit, use both terminals. If you use only one terminal, the relay may be unable to satisfy specified performance.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
<https://components.omron.com/us>
Asia-Pacific
<https://components.omron.com/ap>
Korea
<https://components.omron.com/kr>

Europe
<https://components.omron.com/eu>
China
<https://components.omron.com.cn>
Japan
<https://components.omron.com/jp>