

NTHD4401P

Power MOSFET

–20 V, –3.0 A, Dual P-Channel, ChipFET™

Features

- Low $R_{DS(on)}$ and Fast Switching Speed in a ChipFET Package
- Leadless ChipFET Package 40% Smaller Footprint than TSOP-6
- ChipFET Package with Excellent Thermal Capabilities where Heat Transfer is Required
- Pb-Free Package is Available

Applications

- Charge Control in Battery Chargers
- Optimized for Battery and Load Management Applications in Portable Equipment
- MP3 Players, Cell Phones, Digital Cameras, PDAs
- Buck and Boost DC-DC Converters

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Rating		Symbol	Value	Unit
Drain-to-Source Voltage		V _{DSS}	–20	V
Gate-to-Source Voltage		V _{GS}	±12	V
Continuous Drain Current (Note 1)	Steady State	I _D	–2.1	A
			–1.5	
	t ≤ 5 s		–3.0	
Power Dissipation (Note 1)	Steady State	P _D	1.1	W
			0.6	
	t ≤ 5 s		2.1	
Pulsed Drain Current	tp = 10 µs	I _{DM}	–9.0	A
Operating Junction and Storage Temperature		T _J , T _{stg}	–55 to 150	°C
Source Current (Body Diode)		I _S	–2.5	A
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)		T _L	260	°C

THERMAL RESISTANCE RATINGS

Rating		Symbol	Value	Unit
Junction-to-Ambient – Steady State (Note 1)		R _{θJA}	110	°C/W
Junction-to-Ambient – t ≤ 5 s			60	

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


1. Surface Mounted on FR4 Board using 1 in sq pad size (Cu area = 1.27 in sq [1 oz] including traces).



ON Semiconductor®

<http://onsemi.com>


V _{(BR)DSS}	R _{DS(on)} TYP	I _D MAX
–20 V	130 mΩ @ –4.5 V	–3.0 A
	200 mΩ @ –2.5 V	

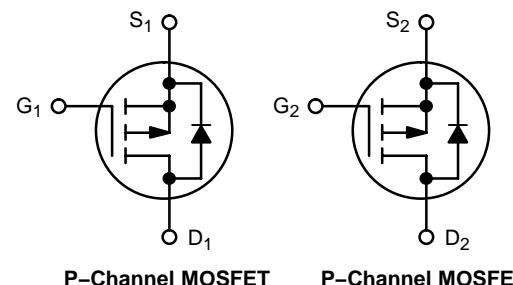

P-Channel MOSFET P-Channel MOSFET



ChipFET
CASE 1206A
STYLE 2

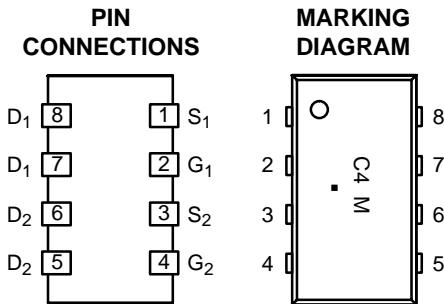

C4 = Specific Device Code

M = Month Code

▪ = Pb-Free Package

ORDERING INFORMATION

Device	Package	Shipping [†]
NTHD4401PT1	ChipFET	3000/Tape & Reel
NTHD4401PT1G	ChipFET (Pb-Free)	3000/Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NTHD4401P

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	V _{(Br)DSS}	V _{GS} = 0 V, I _D = -250 μA	-20	-23		V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V _{(Br)DSS/T_J}			-8.0		mV/°C
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} = 0 V	T _J = 25°C		-1.0	μA
		V _{DS} = -16 V	T _J = 85°C		-5.0	
Gate-to-Source Leakage Current	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±12 V			±100	nA
ON CHARACTERISTICS (Note 2)						
Gate Threshold Voltage	V _{GS(th)}	V _{GS} = V _{DS} , I _D = -250 μA	-0.6	-0.75	-1.2	V
Gate Threshold Temperature Coefficient	V _{GS(th)/T_J}			2.65		mV/°C
Drain-to-Source On Resistance	R _{DSS(on)}	V _{GS} = -4.5 V, I _D = -2.1 A V _{GS} = -2.5 V, I _D = -1.7 A V _{GS} = -1.8 V, I _D = -1.0 A		0.130 0.200 0.34	0.155 0.240	Ω
Forward Transconductance	g _{FS}	V _{DS} = -10 V, I _D = -2.1 A		5.0		S
CHARGES, CAPACITANCES AND GATE RESISTANCE						
Input Capacitance	C _{iss}	V _{GS} = 0 V, f = 1.0 MHz, V _{DS} = -10 V		185	300	pF
Output Capacitance	C _{oss}			95	150	
Reverse Transfer Capacitance	C _{rss}			30	50	
Total Gate Charge	Q _{G(TOT)}	V _{GS} = -4.5 V, V _{DS} = -10 V, I _D = -2.1 A		3.0	6.0	nC
Threshold Gate Charge	Q _{G(TH)}			0.2		
Gate-to-Source Charge	Q _{GS}			0.5		
Gate-to-Drain Charge	Q _{GD}			0.9		
SWITCHING CHARACTERISTICS (Note 3)						
Turn-On Delay Time	t _{d(on)}	V _{GS} = -4.5 V, V _{DD} = -16 V, I _D = -2.1 A, R _G = 2.5 Ω		7.0	12	ns
Rise Time	t _r			13	25	
Turn-Off Delay Time	t _{d(off)}			33	50	
Fall Time	t _f			27	40	
DRAIN-SOURCE DIODE CHARACTERISTICS						
Forward Diode Voltage	V _{SD}	V _{GS} = 0 V I _S = -2.5 A		-0.85	-1.15	V
Reverse Recovery Time	t _{rr}	V _{GS} = 0 V, dI _S /dt = 90 A/μs, I _S = -2.1 A		32		ns
Charge Time	t _a			10		
Discharge Time	t _b			22		
Reverse Recovery Charge	Q _{RR}			15		nC

2. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3. Switching characteristics are independent of operating junction temperatures.

TYPICAL PERFORMANCE CURVES ($T_J = 25^\circ\text{C}$ unless otherwise noted)

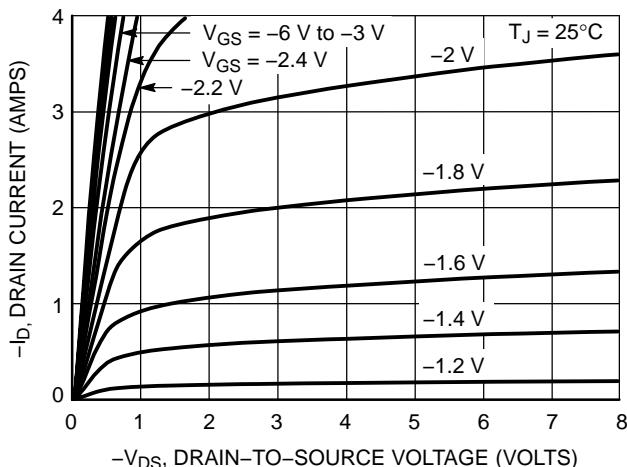


Figure 1. On-Region Characteristics

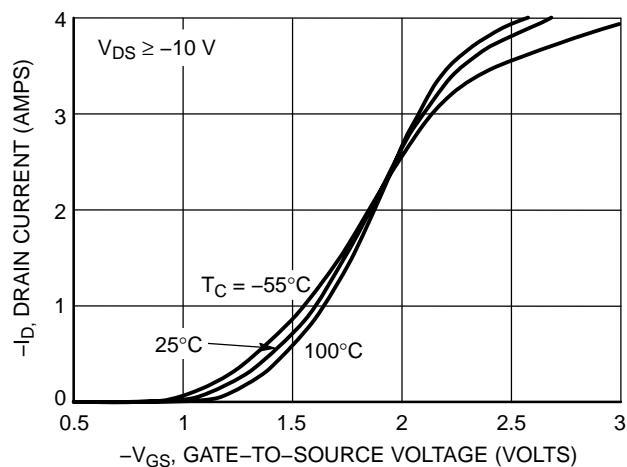


Figure 2. Transfer Characteristics

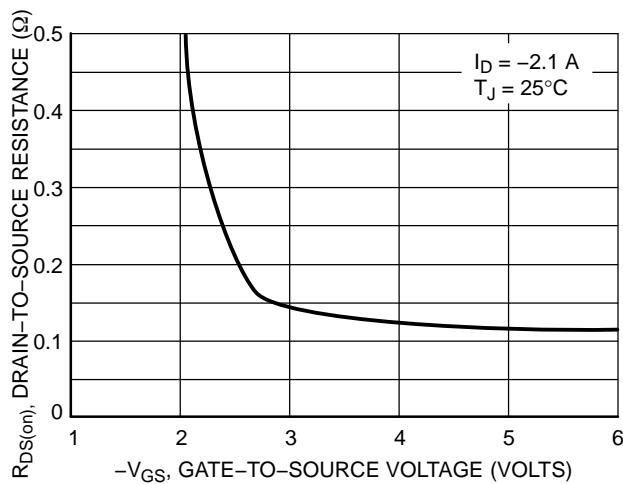


Figure 3. On-Resistance vs. Gate-to-Source Voltage

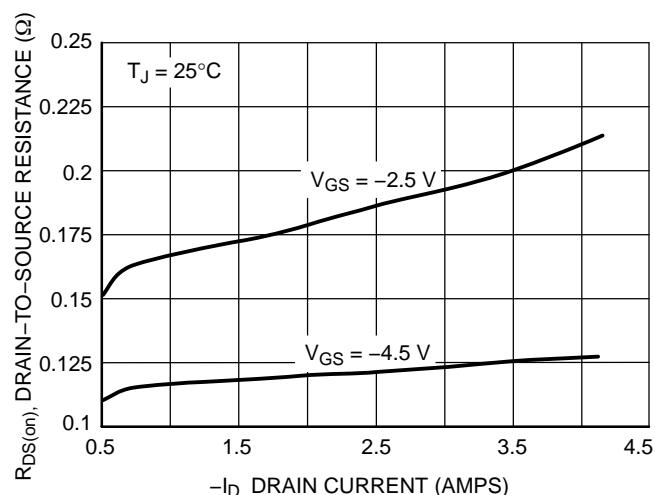


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

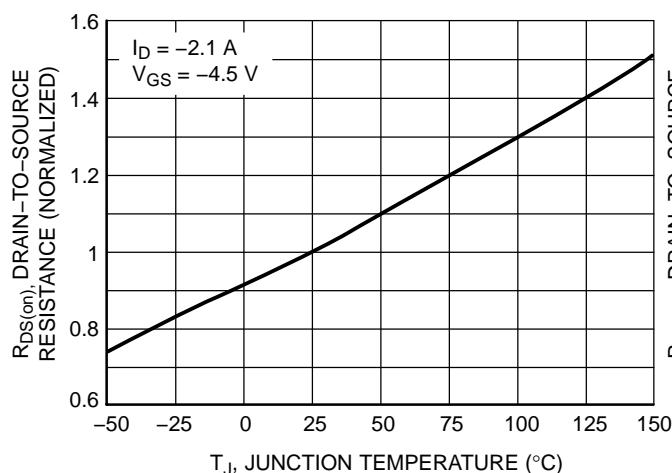


Figure 5. On-Resistance Variation with Temperature

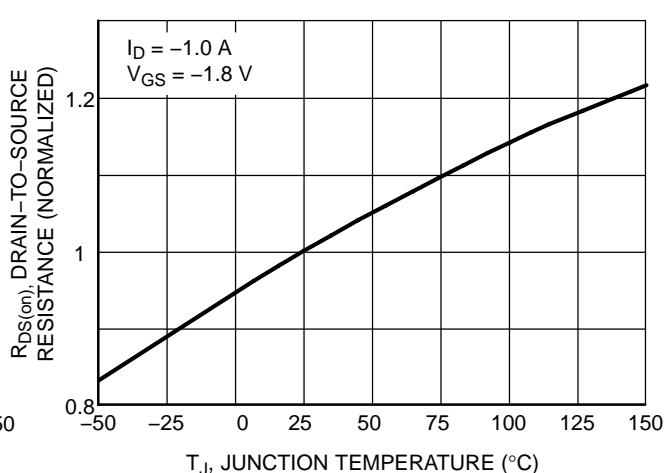


Figure 6. On-Resistance Variation with Temperature

TYPICAL PERFORMANCE CURVES ($T_J = 25^\circ\text{C}$ unless otherwise noted)

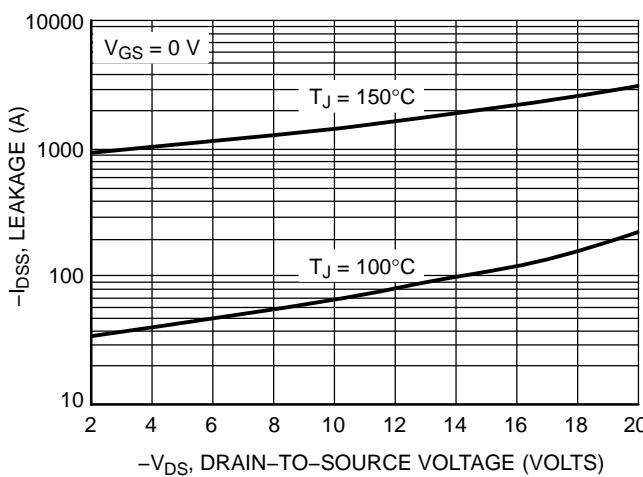


Figure 7. Drain-to-Source Leakage Current vs. Voltage

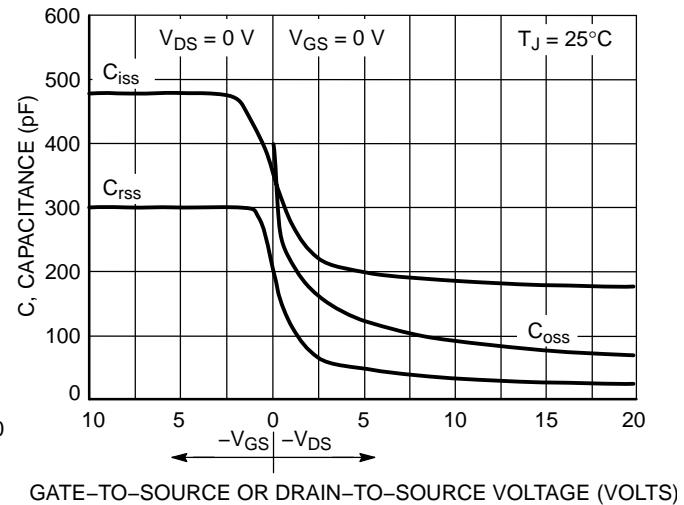


Figure 8. Capacitance Variation

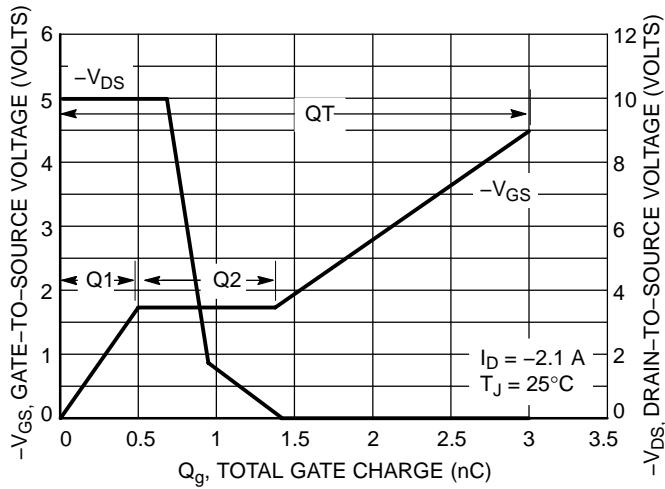


Figure 9. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

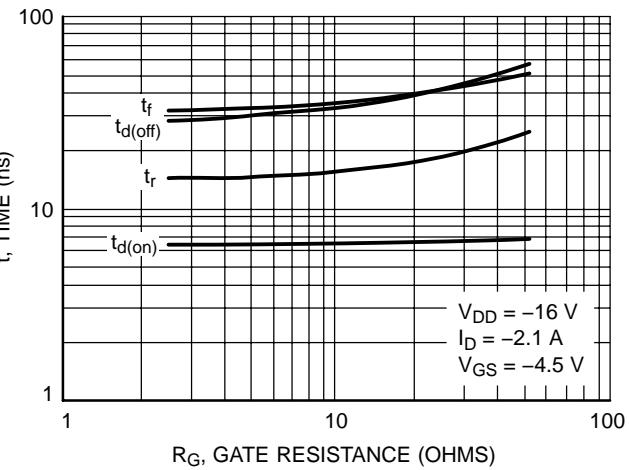


Figure 10. Resistive Switching Time Variation vs. Gate Resistance

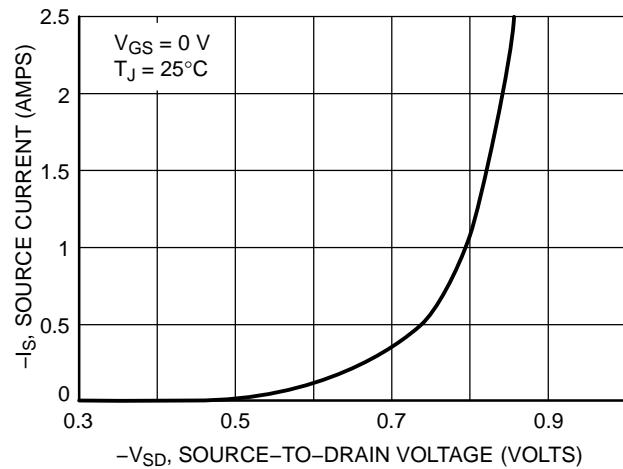


Figure 11. Diode Forward Voltage vs. Current

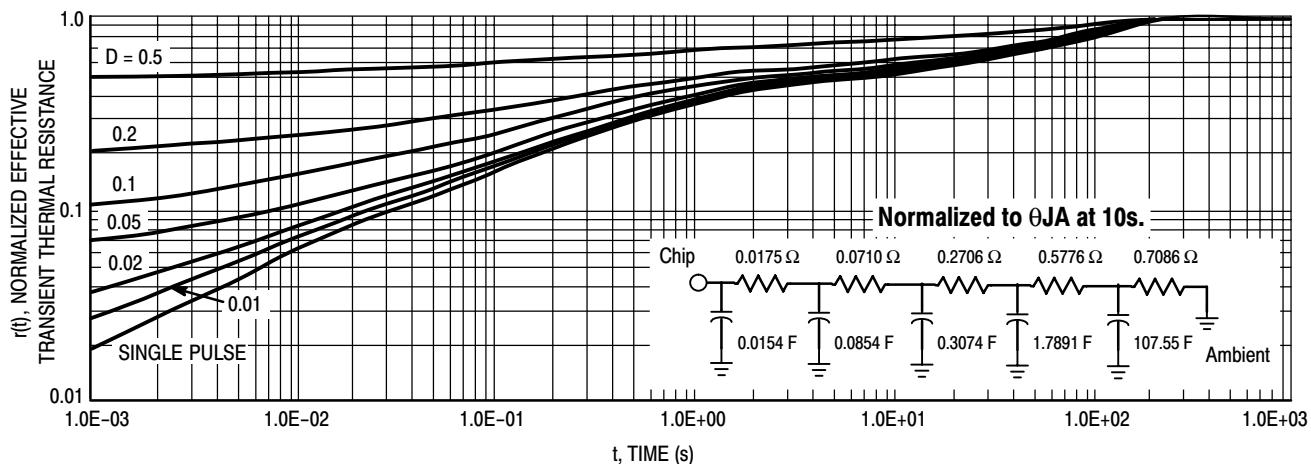


Figure 12. Thermal Response

SOLDERING FOOTPRINT*

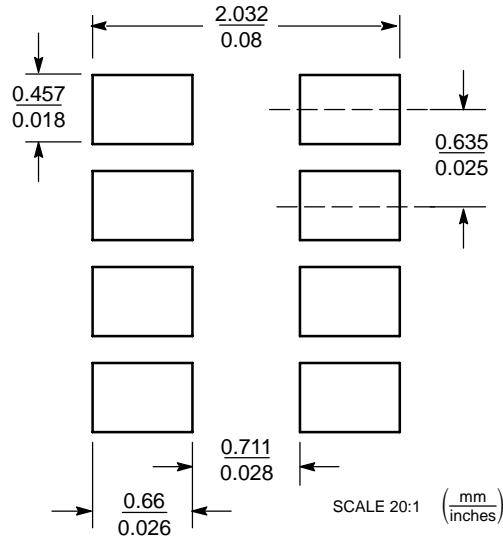


Figure 13. Basic

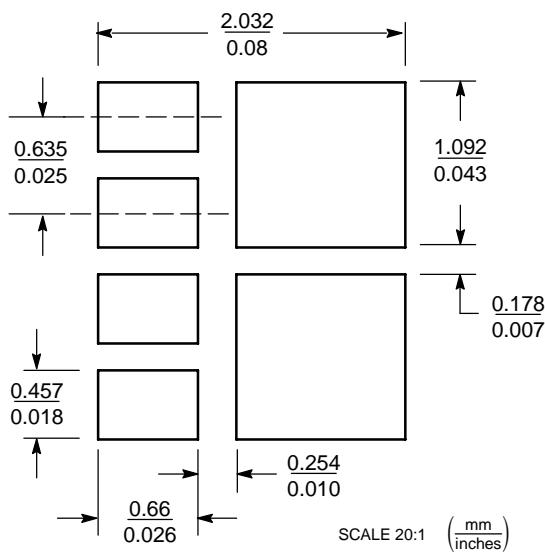


Figure 14. Style 2


*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

BASIC PAD PATTERNS

The basic pad layout with dimensions is shown in Figure 13. This is sufficient for low power dissipation MOSFET applications, but power semiconductor performance requires a greater copper pad area, particularly for the drain leads.

The minimum recommended pad pattern shown in Figure 14 improves the thermal area of the drain connections (pins 5, 6, 7, 8) while remaining within the

confines of the basic footprint. The drain copper area is 0.0019 sq. in. (or 1.22 sq. mm). This will assist the power dissipation path away from the device (through the copper leadframe) and into the board and exterior chassis (if applicable) for the single device. The addition of a further copper area and/or the addition of vias to other board layers will enhance the performance still further.

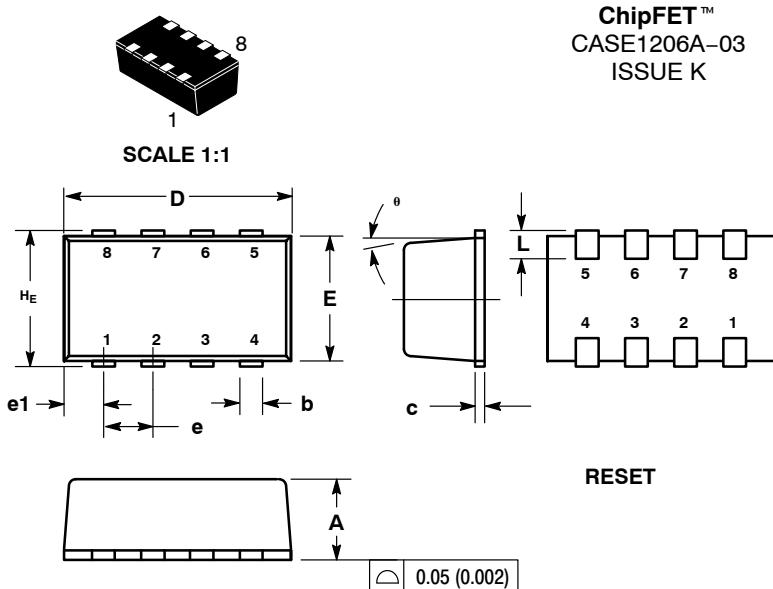

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MOLD GATE BURRS SHALL NOT EXCEED 0.13 MM PER SIDE.
4. LEADFRAME TO MOLDED BODY OFFSET IN HORIZONTAL AND VERTICAL SHALL NOT EXCEED 0.08 MM.
5. DIMENSIONS A AND B EXCLUSIVE OF MOLD GATE BURRS.
6. NO MOLD FLASH ALLOWED ON THE TOP AND BOTTOM LEAD SURFACE.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.00	1.05	1.10	0.039	0.041	0.043
b	0.25	0.30	0.35	0.010	0.012	0.014
c	0.10	0.15	0.20	0.004	0.006	0.008
D	2.95	3.05	3.10	0.116	0.120	0.122
E	1.55	1.65	1.70	0.061	0.065	0.067
e	0.65 BSC			0.025 BSC		
e1	0.55 BSC			0.022 BSC		
L	0.28	0.35	0.42	0.011	0.014	0.017
H _E	1.80	1.90	2.00	0.071	0.075	0.079
θ	5° NOM			5° NOM		

STYLE 1:
PIN 1. DRAIN
2. DRAIN
3. DRAIN
4. GATE
5. SOURCE
6. DRAIN
7. DRAIN
8. DRAIN

STYLE 2:
PIN 1. SOURCE 1
2. GATE 1
3. SOURCE 2
4. GATE 2
5. DRAIN 2
6. DRAIN 2
7. DRAIN 1
8. DRAIN 1


STYLE 3:
PIN 1. ANODE
2. ANODE
3. SOURCE
4. GATE
5. DRAIN 2
6. DRAIN
7. CATHODE
8. CATHODE

STYLE 4:
PIN 1. COLLECTOR
2. COLLECTOR
3. COLLECTOR
4. GATE
5. DRAIN
6. DRAIN
7. CATHODE
8. COLLECTOR

STYLE 5:
PIN 1. ANODE
2. ANODE
3. DRAIN
4. DRAIN
5. Emitter
6. COLLECTOR
7. CATHODE
8. CATHODE

STYLE 6:
PIN 1. ANODE
2. DRAIN
3. DRAIN
4. GATE
5. SOURCE
6. DRAIN
7. DRAIN
8. CATHODE / DRAIN

SOLDERING FOOTPRINT

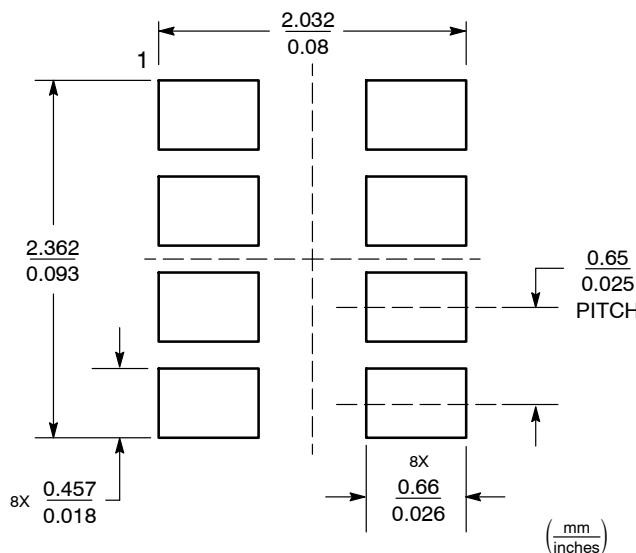GENERIC
MARKING DIAGRAM*

XXX = Specific Device Code
M = Month Code
■ = Pb-Free Package
(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

OPTIONAL SOLDERING FOOTPRINTS ON PAGE 2

DOCUMENT NUMBER:	98AON03078D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	ChipFET	PAGE 1 OF 2


onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019


www.onsemi.com

Downloaded from Arrow.com


ADDITIONAL SOLDERING FOOTPRINTS*

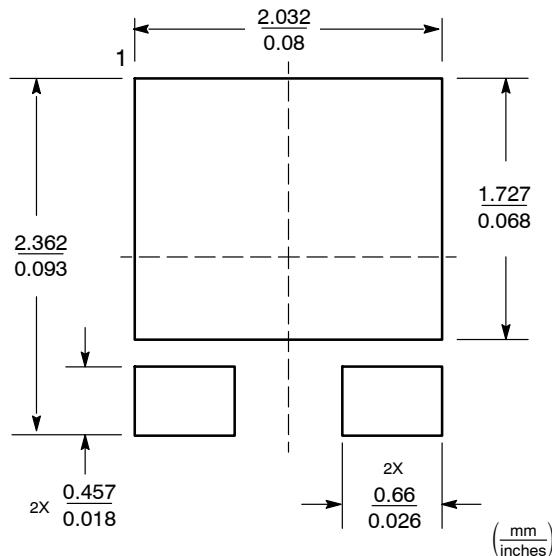


Styles 1 and 4

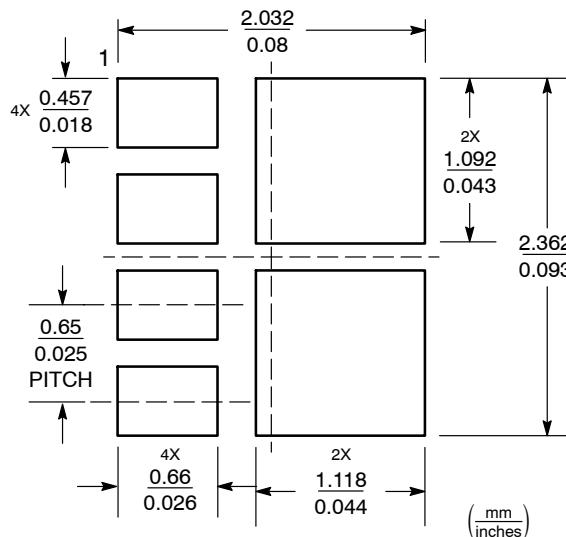

Style 2

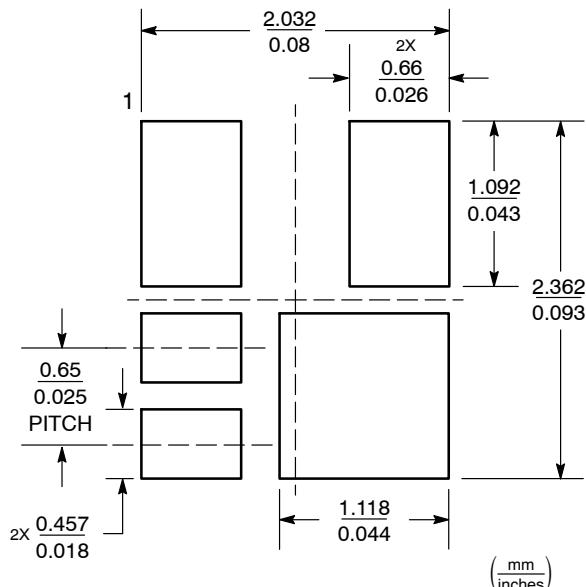

Style 3

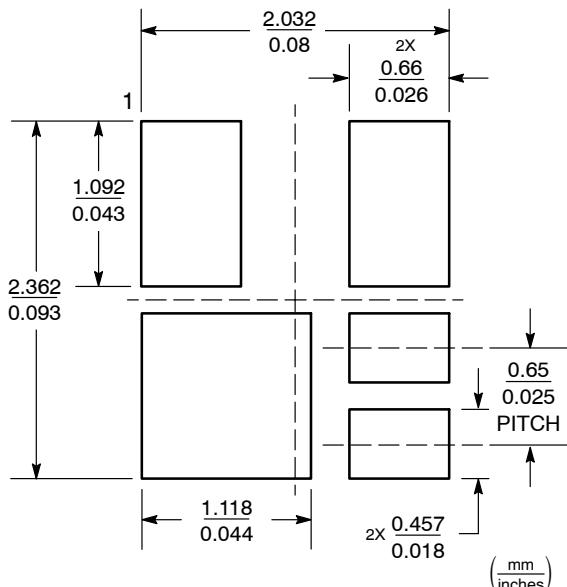

Style 5

*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON03078D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	ChipFET	PAGE 2 OF 2

onsemi and **ONSEMI** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, **ONSEMI**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

