



6-Pin DIP Optoisolators AC Input/Transistor Output

The H11AA1, H11AA2, H11AA3, H11AA4 devices consist of two gallium–arsenide infrared emitting diodes connected in inverse parallel, optically coupled to a monolithic silicon phototransistor detector.

- Built-In Protection for Reverse Polarity
- Guaranteed CTR Minimum Values as High as 100%
- Guaranteed Minimum/Maximum Symmetry Limits
- **To order devices that are tested and marked per VDE 0884 requirements, the suffix "V" must be included at end of part number. VDE 0884 is a test option.**

Applications

- Detecting or Monitoring ac Signals
- AC Line/Digital Logic Isolation
- Programmable Controllers
- Interfacing and coupling systems of different potentials and impedances
- AC/DC — Input Modules

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
--------	--------	-------	------

INPUT LED

Forward Current — Continuous (RMS)	I_F	60	mA
LED Power Dissipation @ $T_A = 25^\circ\text{C}$ with Negligible Power in Output Detector Derate above 25°C	P_D	120 1.41	mW mW/ $^\circ\text{C}$

OUTPUT TRANSISTOR

Collector–Emitter Voltage	V_{CEO}	30	Volts
Emitter–Base Voltage	V_{EBO}	5	Volts
Collector–Base Voltage	V_{CBO}	70	Volts
Collector Current — Continuous	I_C	150	mA
Detector Power Dissipation @ $T_A = 25^\circ\text{C}$ with Negligible Power in Input LEDs Derate above 25°C	P_D	150 1.76	mW mW/ $^\circ\text{C}$

TOTAL DEVICE

Isolation Surge Voltage ⁽¹⁾ (Peak ac Voltage, 60 Hz, 1 sec Duration)	V_{ISO}	7500	Vac(pk)
Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	250 2.94	mW mW/ $^\circ\text{C}$
Ambient Operating Temperature Range ⁽²⁾	T_A	–55 to +100	$^\circ\text{C}$
Storage Temperature Range ⁽²⁾	T_{stg}	–55 to +150	$^\circ\text{C}$
Soldering Temperature (10 sec, 1/16" from case)	T_L	260	$^\circ\text{C}$

1. Isolation surge voltage is an internal device dielectric breakdown rating.
For this test, Pins 1 and 2 are common, and Pins 4, 5 and 6 are common.
2. Refer to Quality and Reliability Section in Opto Data Book for information on test conditions.

Preferred devices are Motorola recommended choices for future use and best overall value.
GlobalOptoisolator is a trademark of Motorola, Inc.

H11AA1*
[CTR = 20% Min]


H11AA2
[CTR = 10% Min]

H11AA3
[CTR = 50% Min]

H11AA4*
[CTR = 100% Min]


*Motorola Preferred Devices

STYLE 8 PLASTIC



STANDARD THRU HOLE
CASE 730A-04

SCHEMATIC



- PIN 1. INPUT LED
2. INPUT LED
3. NO CONNECTION
4. EMITTER
5. COLLECTOR
6. BASE

H11AA1 H11AA2 H11AA3 H11AA4

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)⁽¹⁾

Characteristic	Symbol	Min	Typ ⁽¹⁾	Max	Unit
INPUT LED					
Forward Voltage (I _F = 10 mA, either direction)	V _F	—	1.15	1.5	Volts
T _A = -55°C		—	1.15	1.8	
T _A = 100°C		—	1.3	—	
		—	1.05	—	
Capacitance (V = 0 V, f = 1 MHz)	C _J	—	20	—	pF

OUTPUT TRANSISTOR

Collector–Emitter Dark Current (V _{CE} = 10 V)	I _{CEO}	H11AA1,3,4	—	1	100	nA
		H11AA2	—	1	200	nA
T _A = 100°C		All devices	—	1	—	μA
Collector–Base Dark Current (V _{CB} = 10 V)	I _{CBO}		—	0.2	—	nA
Collector–Emitter Breakdown Voltage (I _C = 10 mA)	V _{(BR)CEO}		30	45	—	Volts
Collector–Base Breakdown Voltage (I _C = 100 μA)	V _{(BR)CBO}		70	100	—	Volts
Emitter–Collector Breakdown Voltage (I _E = 100 μA)	V _{(BR)ECO}		5	7.8	—	Volts
DC Current Gain (I _C = 2 mA, V _{CE} = 5 V) (Typical Value)	h _{FE}		—	500	—	—
Collector–Emitter Capacitance (f = 1 MHz, V _{CE} = 0 V)	C _{CE}		—	1.7	—	pF
Collector–Base Capacitance (f = 1 MHz, V _{CB} = 0 V)	C _{CB}		—	20	—	pF
Emitter–Base Capacitance (f = 1 MHz, V _{EB} = 0 V)	C _{EB}		—	10	—	pF

COUPLED

Output Collector Current (I _F = ±10 mA, V _{CE} = 10 V)	I _C (CTR) ⁽²⁾	H11AA1	2 (20)	5 (50)	—	mA (%)
		H11AA2	1 (10)	2 (20)	—	
		H11AA3	5 (50)	10 (100)	—	
		H11AA4	10 (100)	15 (150)	—	
Output Collector Current Symmetry ⁽³⁾ $\left(\frac{I_C \text{ at } I_F = +10 \text{ mA, } V_{CE} = 10 \text{ V}}{I_C \text{ at } I_F = -10 \text{ mA, } V_{CE} = 10 \text{ V}} \right)$	—	H11AA1,3,4	0.33	—	3	—
Collector–Emitter Saturation Voltage (I _C = 0.5 mA, I _F = ±10 mA)	V _{CE(sat)}		—	0.1	0.4	Volts
Isolation Voltage (f = 60 Hz, t = 1 sec) ⁽⁴⁾	V _{ISO}		7500	—	—	Vac(pk)
Isolation Resistance (V = 500 V) ⁽⁴⁾	R _{ISO}		10 ¹¹	—	—	Ω
Isolation Capacitance (V = 0 V, f = 1 MHz) ⁽⁴⁾	C _{ISO}		—	0.2	—	pF

1. Always design to the specified minimum/maximum electrical limits (where applicable).
2. Current Transfer Ratio (CTR) = I_C/I_F × 100%.
3. This specification guarantees that the higher of the two I_C readings will be no more than 3 times the lower at I_F = 10 mA.
4. For this test, Pins 1 and 2 are common, and Pins 4, 5 and 6 are common.

TYPICAL CHARACTERISTICS

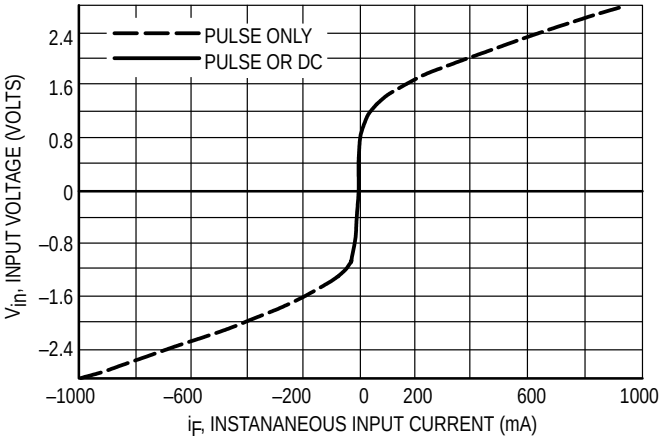


Figure 1. Input Voltage versus Input Current

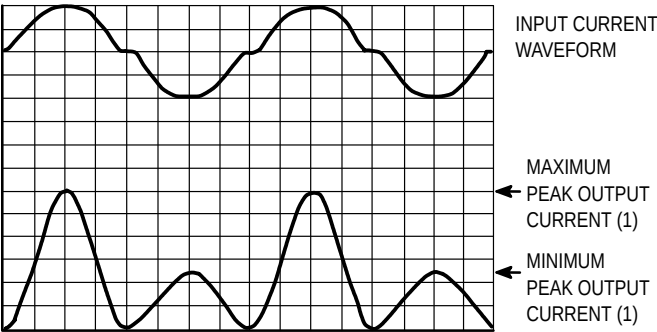


Figure 2. Output Characteristics

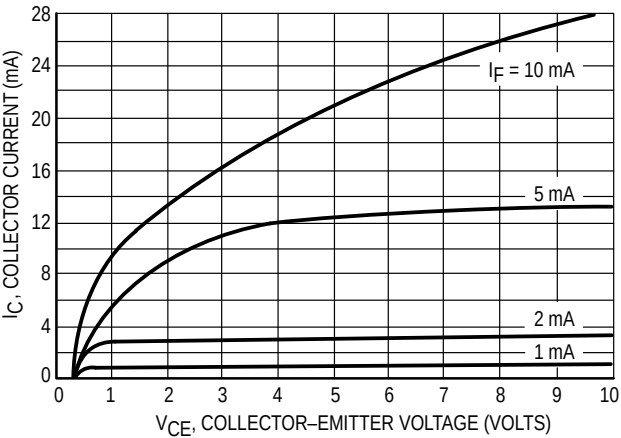


Figure 3. Collector Current versus Collector-Emitter Voltage

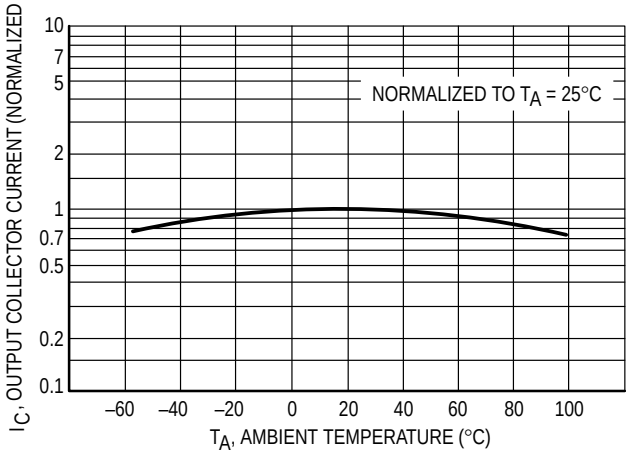


Figure 4. Output Current versus Ambient Temperature

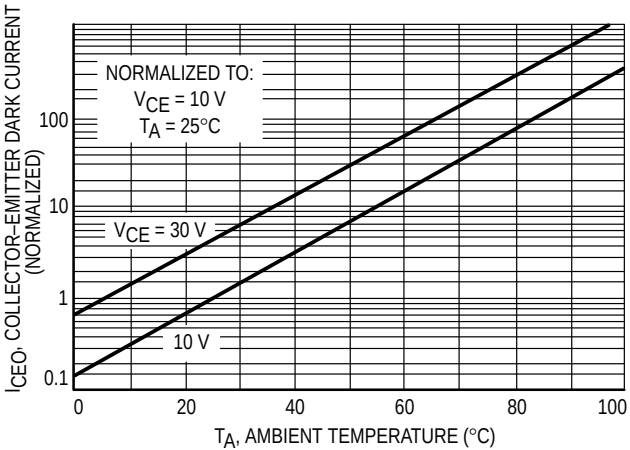


Figure 5. Dark Current versus Ambient Temperature


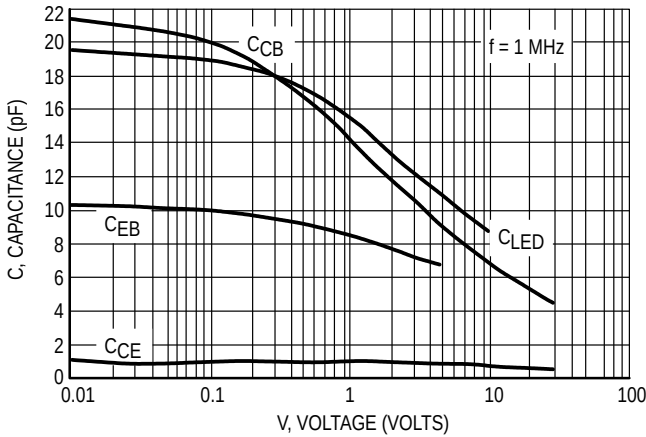


Figure 6. Capacitances versus Voltage

H11AA1 H11AA2 H11AA3 H11AA4

PACKAGE DIMENSIONS

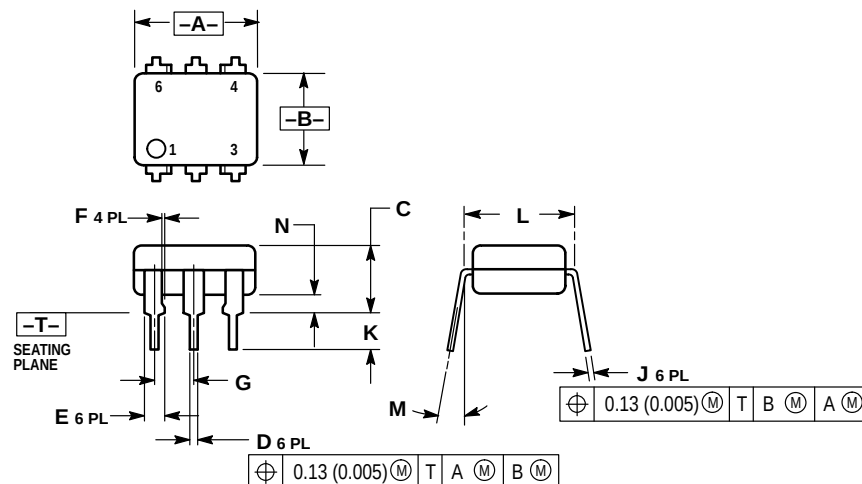


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.320	0.350	8.13	8.89
B	0.240	0.260	6.10	6.60
C	0.115	0.200	2.93	5.08
D	0.016	0.020	0.41	0.50
E	0.040	0.070	1.02	1.77
F	0.010	0.014	0.25	0.36
G	0.100 BSC	2.54 BSC		
J	0.008	0.012	0.21	0.30
K	0.100	0.150	2.54	3.81
L	0.300 BSC	7.62 BSC		
M	0°	15°	0°	15°
N	0.015	0.100	0.38	2.54

- STYLE 8:
- PIN 1. LED 1 ANODE/LED 2 CATHODE
 - LED 1 CATHODE/LED 2 ANODE
 - NC
 - EMITTER
 - COLLECTOR
 - BASE

CASE 730A-04 ISSUE G

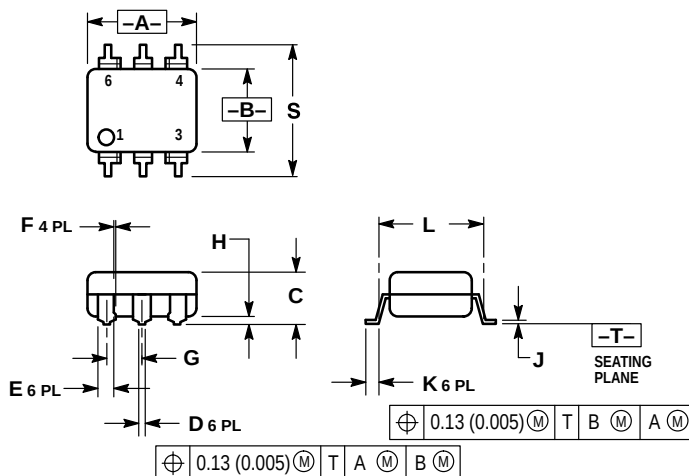


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.320	0.350	8.13	8.89
B	0.240	0.260	6.10	6.60
C	0.115	0.200	2.93	5.08
D	0.016	0.020	0.41	0.50
E	0.040	0.070	1.02	1.77
F	0.010	0.014	0.25	0.36
G	0.100 BSC	2.54 BSC		
H	0.020	0.025	0.51	0.63
J	0.008	0.012	0.20	0.30
K	0.006	0.035	0.16	0.88
L	0.320 BSC	8.13 BSC		
S	0.332	0.390	8.43	9.90

***Consult factory for leadform option availability**

CASE 730C-04 ISSUE D

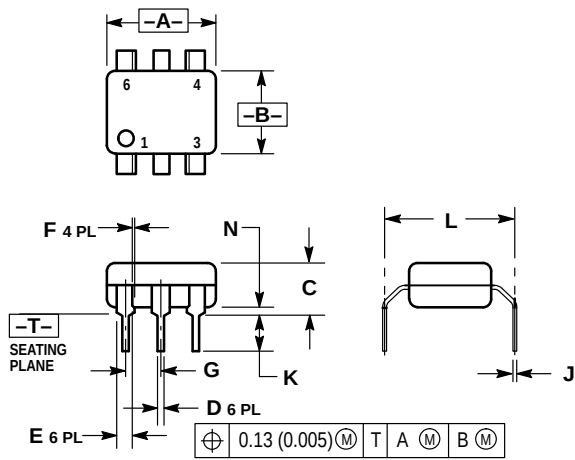

- NOTES:
- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 - 2. CONTROLLING DIMENSION: INCH.
 - 3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.320	0.350	8.13	8.89
B	0.240	0.260	6.10	6.60
C	0.115	0.200	2.93	5.08
D	0.016	0.020	0.41	0.50
E	0.040	0.070	1.02	1.77
F	0.010	0.014	0.25	0.36
G	0.100 BSC		2.54 BSC	
J	0.008	0.012	0.21	0.30
K	0.100	0.150	2.54	3.81
L	0.400	0.425	10.16	10.80
N	0.015	0.040	0.38	1.02

***Consult factory for leadform option availability**

**CASE 730D-05
ISSUE D**

H11AA1 H11AA2 H11AA3 H11AA4

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244-6609
INTERNET: <http://Design-NET.com>

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



H11AA1/D

