
D3M

Subminiature Basic Switch

Quick-connect Terminals Simplify Wiring and Reduce Production Steps

- **Easy wiring is ensured by quick-connect terminals, and horizontal layout of terminals saves mounting space.**
- **External actuator mounts in either of two directions to increase Switch mounting flexibility.**
- **Same mounting pitch as the OMRON SS Subminiature Basic Switch.**

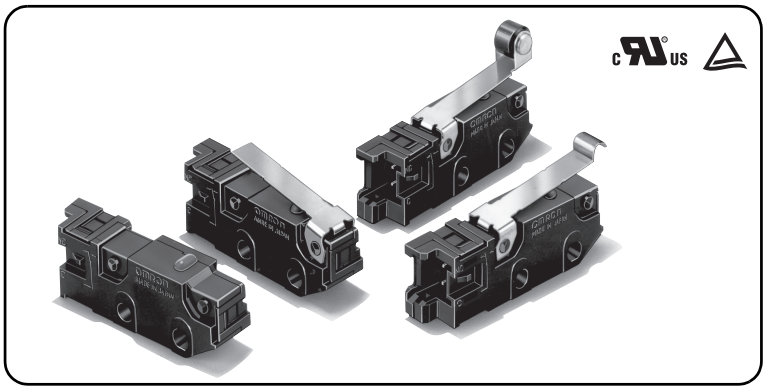


Model Number Legend

D3M-01 1 2 3


1. Lever mounting position

None : without lever

K : Lever set close to plunger



L : Lever set distant from plunger



2. Actuator

None : Pin plunger

1 : Hinge lever

2 : Hinge roller lever

3 : Simulated roller lever

3. Contact form

None : SPST-NC (Color of plunger: Red)


-3 : SPST-NO (Color of plunger: Black)

List of Models (Contact your dealer for detailed delivery date.)


Actuator		Lever Mounting Position	Contact Form	Model
Pin plunger		-	SPST-NC	**D3M-01**
			SPST-NO	**D3M-01-3**
Hinge lever		K	SPST-NC	**D3M-01K1**
			SPST-NO	**D3M-01K1-3**
		L	SPST-NC	**D3M-01L1**
			SPST-NO	**D3M-01L1-3**
Hinge roller lever		K	SPST-NC	**D3M-01K2**
			SPST-NO	**D3M-01K2-3**
		L	SPST-NC	**D3M-01L2**
			SPST-NO	**D3M-01L2-3**
Simulated roller lever		K	SPST-NC	**D3M-01K3**
			SPST-NO	**D3M-01K3-3**
		L	SPST-NC	**D3M-01L3**
			SPST-NO	**D3M-01L3-3**

Contact Form

●SPST-NC



●SPST-NO



Contact Specifications

Contact	Specification	Crossbar
	Material	Gold alloy
	Gap (standard value)	0.5 mm
Inrush current		1 A max.
Minimum applicable load (reference value)*		5 VDC 1 mA

* Please refer to "●**Using Micro Loads**" in "**Precautions**" for more information on the minimum applicable load.

Ratings

Rated voltage	Resistive load
30 VDC	0.1 A

Note. The above rating values apply under the following test conditions.
(1) Ambient temperature: 20±2°C
(2) Ambient humidity: 65±5%
(3) Operating frequency: 30 operations/min

Approved Safety Standards

UL (UL61058-1)/cUL (CSA C22.2 No.61058-1)

Rated voltage Model	D3M
30 VDC	0.1 A

TÜV (EN61058-1)

Rated voltage Model	D3M
30 VDC	0.1 A

Testing conditions: 1E5 (100,000 operations) T55 (0°C to 55°C)


Downloaded from Arrow.com.

Characteristics

Permissible operating speed		0.1 mm to 1 m/s (for pin plunger models)
Permissible operating frequency	Mechanical	400 operations/min
	Electrical	60 operations/min
Insulation resistance		100 MΩ min. (at 500 VDC with insulation tester)
Contact resistance (initial value) *1		100 mΩ max.
Dielectric strength	Between terminals of the same polarity	1,000 VAC 50/60 Hz for 1 min
	Between current-carrying metal parts and ground	1,500 VAC 50/60 Hz for 1 min
	Between each terminals and non-current-carrying metal parts	1,500 VAC 50/60 Hz for 1 min
Vibration resistance *2	Malfunction	10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Durability	1,000m/s² {approx. 100G} max.
	Malfunction *2	300 m/s² {approx. 30G} max.
Durability *3	Mechanical	500,000 operations min. (60 operations/min)
	Electrical	200,000 operations min. (30 operations/min)
Degree of protection		IEC IP40
Ambient operating temperature		-25°C to +85°C at ambient humidity of 60% max. (with no icing or condensation)
Ambient operating humidity		80% max. (for +5°C to +35°C)
Weight		Approx. 2g (pin plunger models)


Note. The data given above are initial values.
*1. Includes the resistance of the connector and lead wire (AWG #28, 50 mm length).
*2. The values are Free Position and Total Travel Position values for pin plunger, and Total Travel Position value for lever. Close or open circuit of the contact is 1 ms max.
*3. For testing conditions, consult your OMRON sales representative.

Mounting Holes (Unit: mm)



Dimensions (Unit: mm) and Operating Characteristics

●Pin Plunger
D3M-01
D3M-01-3

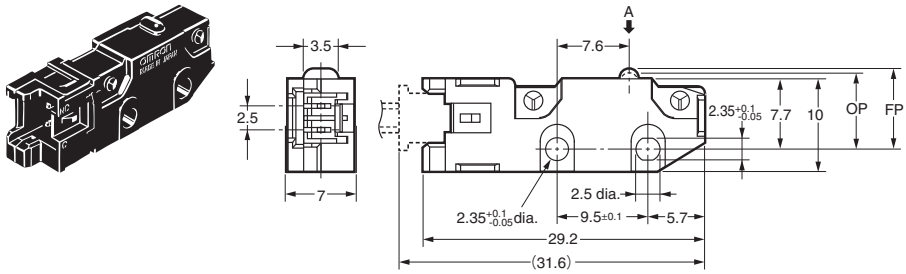


Operating Characteristics		Models: D3M-01 / D3M-01-3
Operating Force	OF Max.	1.50 N {153 gf}
Releasing Force	RF Min.	0.25 N {25 gf}
Pretravel	PT Max.	0.6 mm
Overtravel	OT Min.	0.4 mm
Movement Differential	MD Max.	0.1 mm
Operating Position	OP	8.4±0.3 mm

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.
Note 2. The operating characteristics are for operation in the A direction (⬇).
Note 3. The terminals connect to JST's Dipole XA Connector.


Downloaded from Arrow.com.

●Hinge Lever (K position)
D3M-01K1
D3M-01K1-3

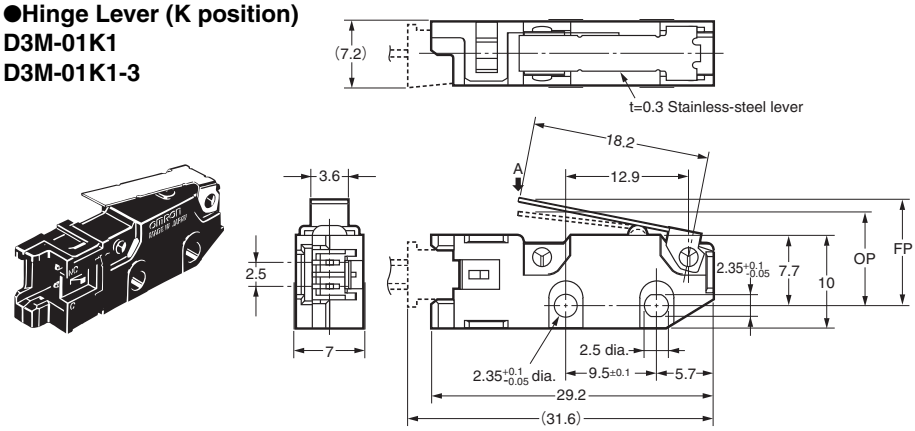


Operating Characteristics		Models	D3M-01K1 D3M-01K1-3
Operating Force Releasing Force	OF Max. RF Min.		0.50 N {51 gf} 0.06 N {6 gf}
Overtravel Movement Differential	OT Min. MD Max.		1.2 mm 0.8 mm
Free Position Operating Position	FP Max. OP		14.0 mm 10.0±0.8 mm

●Hinge Lever (L position)
D3M-01L1
D3M-01L1-3

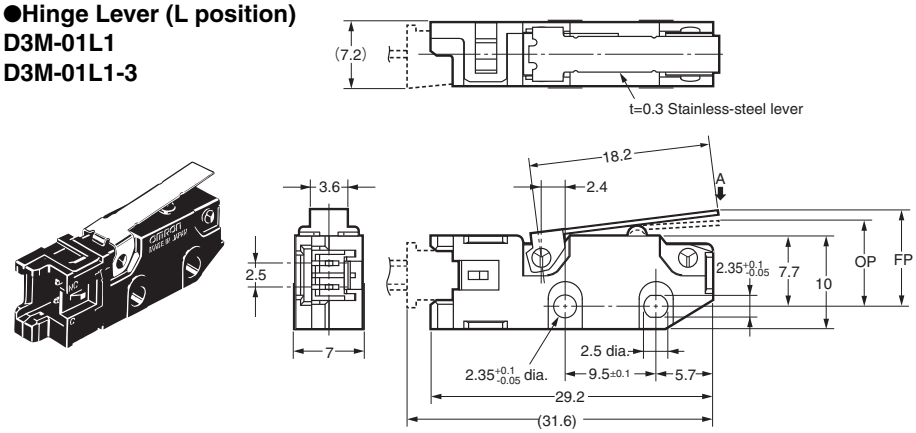


Operating Characteristics		Models	D3M-01L1 D3M-01L1-3
Operating Force Releasing Force	OF Max. RF Min.		1.00 N {102 gf} 0.10 N {10 gf}
Overtravel Movement Differential	OT Min. MD Max.		0.7 mm 0.6 mm
Free Position Operating Position	FP Max. OP		11.5 mm 9.2±0.6 mm

●Hinge Roller Lever (K position)
D3M-01K2
D3M-01K2-3

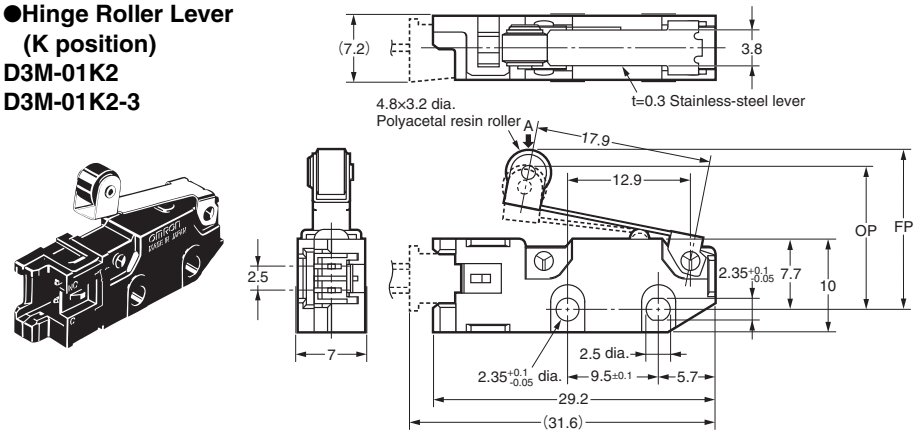

Operating Characteristics		Models	D3M-01K2 D3M-01K2-3
Operating Force Releasing Force	OF Max. RF Min.		0.50 N {51 gf} 0.06 N {6 gf}
Overtravel Movement Differential	OT Min. MD Max.		1.2 mm 0.8 mm
Free Position Operating Position	FP Max. OP		19.7 mm 15.7±0.8 mm

●Hinge Roller Lever (L position)
D3M-01L2
D3M-01L2-3

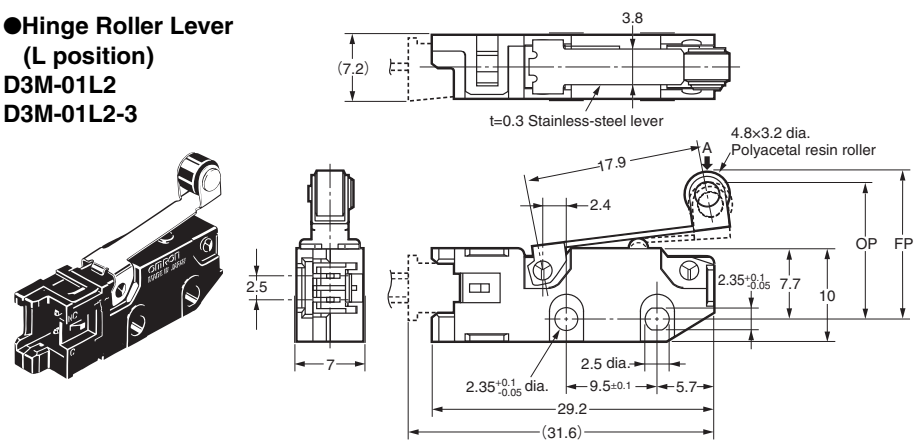



Operating Characteristics		Models	D3M-01L2 D3M-01L2-3
Operating Force Releasing Force	OF Max. RF Min.		1.00N {102 gf} 0.10N {10 gf}
Overtravel Movement Differential	OT Min. MD Max.		0.7mm 0.6mm
Free Position Operating Position	FP Max. OP		17.2 mm 14.9±0.6 mm

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.
Note 2. The operating characteristics are for operation in the A direction (⬇).
Note 3. The terminals connect to JST's Dipole XA Connector.

Downloaded from Arrow.com.


●Simulated Roller Lever (K position)
D3M-01K3
D3M-01K3-3




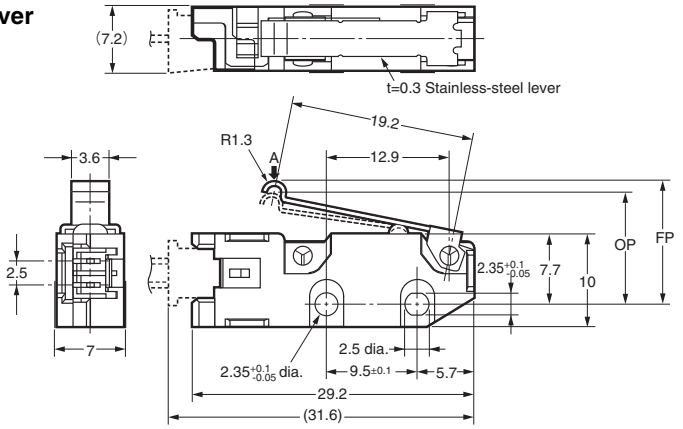

Operating Characteristics		Models D3M-01K3 / D3M-01K3-3
Operating Force / Releasing Force	OF Max. / RF Min.	0.50 N {51 gf} / 0.06 N {6 gf}
Overtravel / Movement Differential	OT Min. / MD Max.	1.2 mm / 0.8 mm
Free Position / Operating Position	FP Max. / OP	16.2 mm / 12.2±0.8 mm

●Simulated Roller Lever (L position)
D3M-01L3
D3M-01L3-3



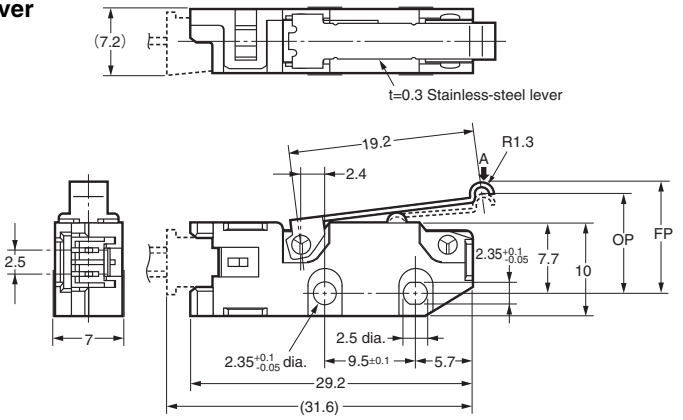

Operating Characteristics		Models D3M-01L3 / D3M-01L3-3
Operating Force / Releasing Force	OF Max. / RF Min.	1.00N {102 gf} / 0.10N {10 gf}
Overtravel / Movement Differential	OT Min. / MD Max.	0.7 mm / 0.6 mm
Free Position / Operating Position	FP Max. / OP	13.6 mm / 11.3±0.6 mm

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.
Note 2. The operating characteristics are for operation in the A direction (⬇).
Note 3. The terminals connect to JST's Dipole XA Connector.

Precautions

★Please refer to "Common Precautions" for correct use.

Correct Use

●Mounting

Use M2.3 mounting screw with plane washers or spring washers to securely mount the Switch.


Tighten the screws to a torque of 0.23 to 0.26 N·m {2.3 to 2.7 kgf·cm}.

●Wiring

Do not use the Switch with Connector mounted and weight load applied to the Connector and lead wire, otherwise it may rattle or may result in connection failure.

●Using Micro Loads

Using a model for ordinary loads to open or close the contact of a micro load circuit may result in faulty contact. It is recommended to use the Switch in the operation range shown in the diagram. However, even when using micro load models within the operating range shown below, if inrush current occurs when the contact is opened or closed, it may increase contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary.

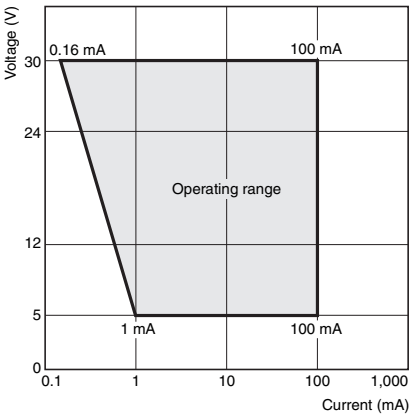

The N-level reference value applies for the minimum applicable load. This value indicates the malfunction reference level for the reliability level of 60% (λ_{60}). (JIS C5003)

The equation, $\lambda_{60}=0.5\times10^{-6}$/operation indicates that the estimated malfunction rate is less than $\frac{1}{2{,}000{,}000}$ operations with a reliability level of 60%. This indicates that it is considered malfunction.

Connector

- The terminals connect to JST's XA Connector.
  Contact: SXA-001T-P0.6
  Housing: XAP-02V-1
- OMRON does not sell the XA Connector.
- Contact JST Mfg. for more information on the connectors.

J.S.T. Manufacturing Co., Ltd.
http://www.jst-mfg.com/index_e.php

Downloaded from Arrow.com.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us

Europe
https://components.omron.com/eu

Asia-Pacific
https://components.omron.com/ap

China
https://components.omron.com.cn

Korea
https://components.omron.com/kr

Japan
https://components.omron.com/jp

© OMRON Corporation 2007-2022 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. B100-E1-07
1122 (0207)

Downloaded from Arrow.com.