



HONEYWELL PART NUMBER
41SM28-T2
PRODUCT CODE TYC2517

REV	DOCUMENT	CHANGED BY	CHECK
3	0038112	KVS 04JUN08	ASD

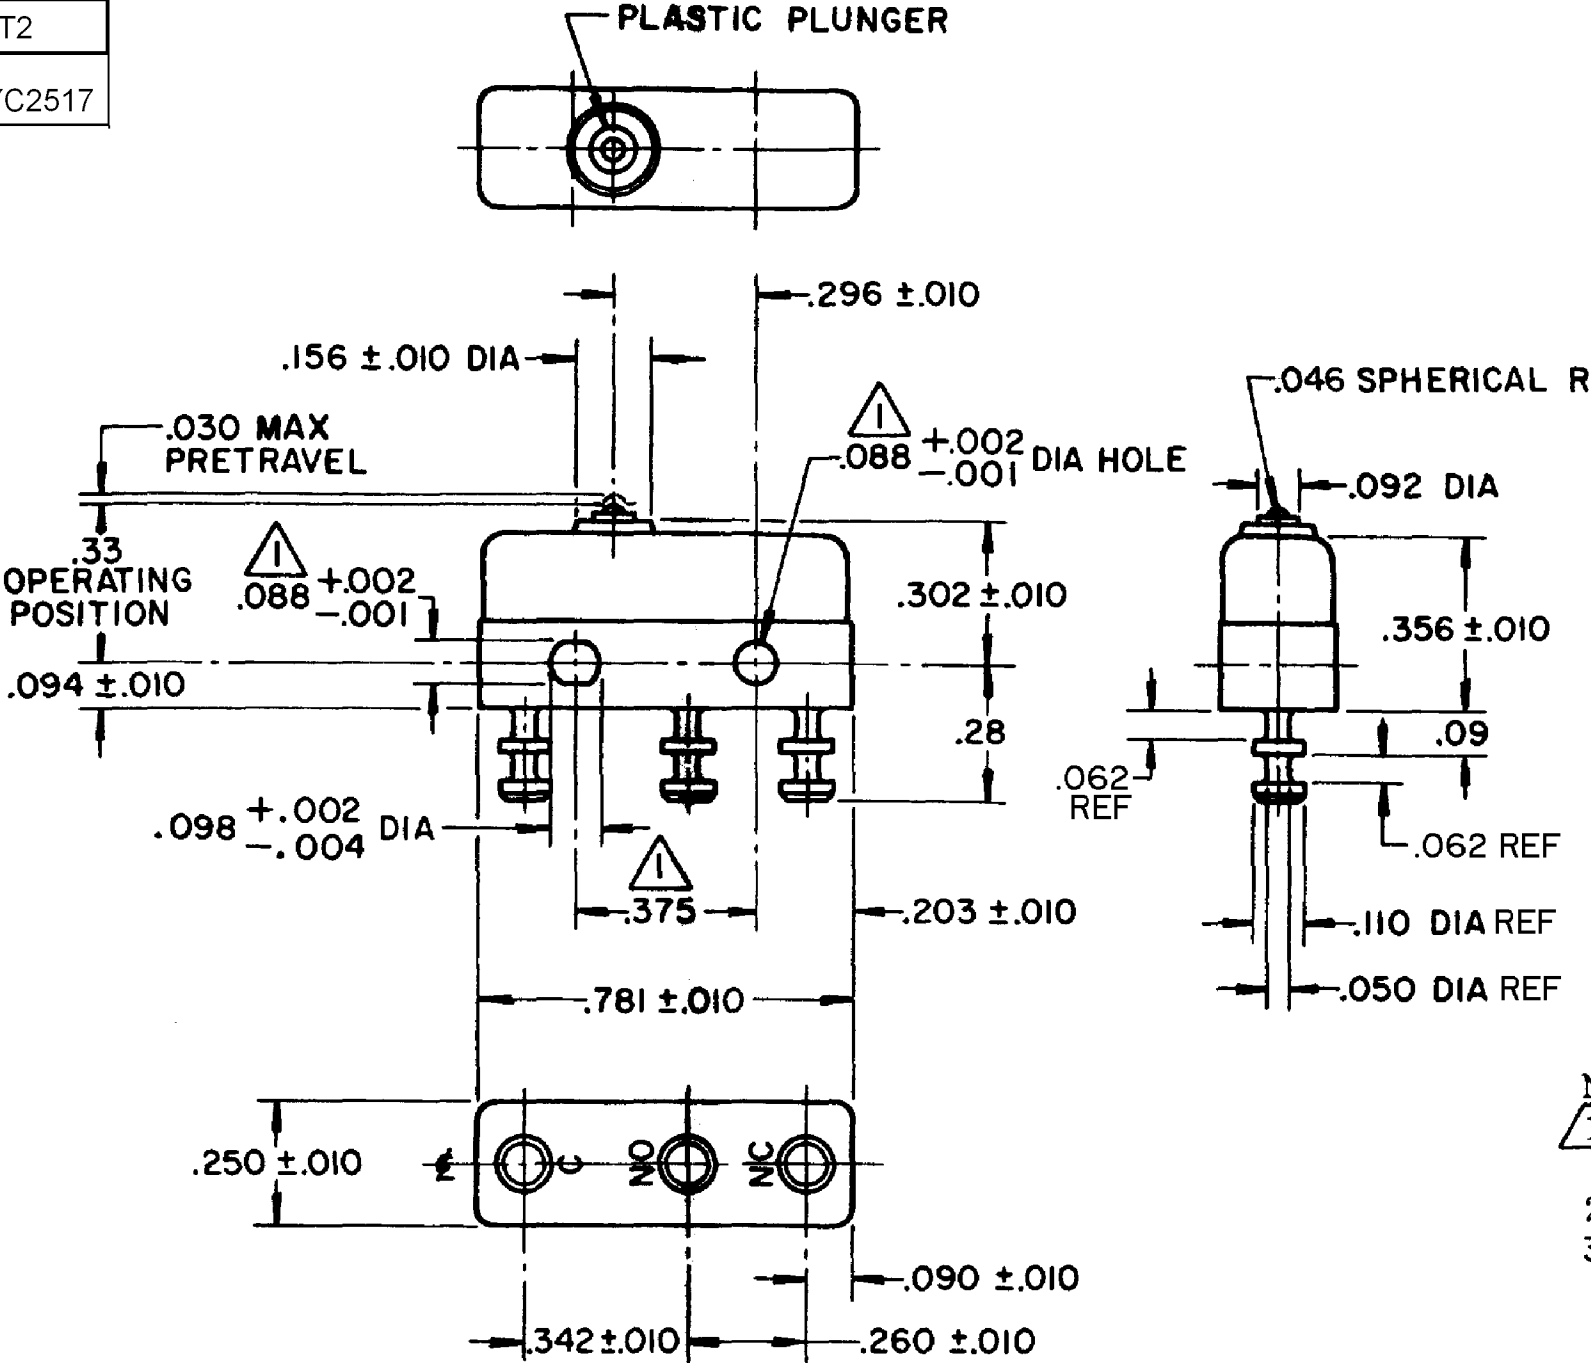

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR - 16501
REPLACES	X88855 - SM

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	VK	25 OCT 07	Honeywell			
OPERATING FORCE — — — 3 — 5 OZ		CONTACT ARRANGEMENT S P D T				CHECK	RJ	25 OCT 07				
RELEASE FORCE— — — — — 1 OZ MIN		APPROVALS	KEMA, CE	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL— — — .003 MAX			UL, CSA	11A 1/4 HP 125 250 VAC 5A 30 VDC   BRAND L190								
OVERTRAVEL — — — — — .005 MIN							INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME 41SM28-T2
						RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1