

FIBERGLASS OMNIDIRECTIONAL ANTENNAS

FG1520

FIBERGLASS BASE STATION ANTENNAS FEATURE INDUSTRY-LEADING DESIGN COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

TE Connectivity's fiberglass base station antennas are collinear designs enclosed in a high density fiberglass, which is covered with a protective ultraviolet inhibiting coating.

The radiating elements are made from high efficiency copper and are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a cold sleeve allowing great freedom in mounting. This high quality and well-focused beam provides the highest gain and best efficiency.

FEATURES AND BENEFITS

- Every FG fiberglass base antenna is tested on a network analyzer before shipping to assure the best performance.
- Special UV Treated - stands up to the sun
- Durable gold anodized sleeve and cap with N Female connector
- Custom tuning available
- FedEx / UPS Shippable

APPLICATIONS:

- Omnidirectional (circular) outdoor antenna applications used by private organizations and government agencies around the globe.
- Typical applications include land based and marine radio and data transmissions for public safety agencies, commercial organizations, and the military.


ELECTRICAL SPECIFICATIONS	
Frequency Range	152 156 MHz
VSWR	< 2:1 Max
Nominal Gain	0 dBd
Maximum Power	200 W
Nominal Impedance	50 Ω
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation x Azimuth)	120 x 360
Coaxial Cable Length & Type	None
Termination	N Female connector

Downloaded from Arrow.com.


ELECTRICAL SPECIFICATIONS	
Lightning Protection	Lightning Arrestor LABH350NN (Sold separately)

MECHANICAL SPECIFICATIONS	
Height	70-1/2
Diameter	1.310
Weight	< 4 lbs
Rated Wind Velocity	125 mph (210 kph)
Rated Wind Velocity (with 0.5 radial ice)	85 mph (137 kph)
Lateral Thrust @ 125mph wind velocity	57 lbs. (26 kg)
Wind Resistance	0.6413 sq. ft.
Mounting Information	FM2 Mounting Kit (Sold separately)

ELEVATION PATTERN (Y, Z, OR H-PLANE)

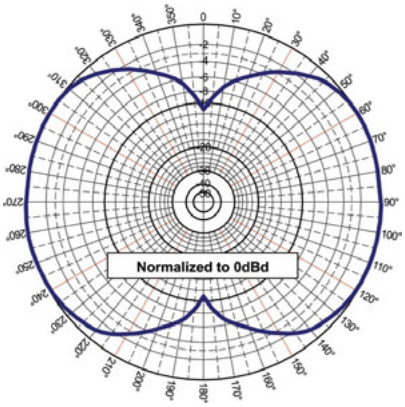

AZIMUTHAL PATTERN (Y, Z, OR E-PLANE)

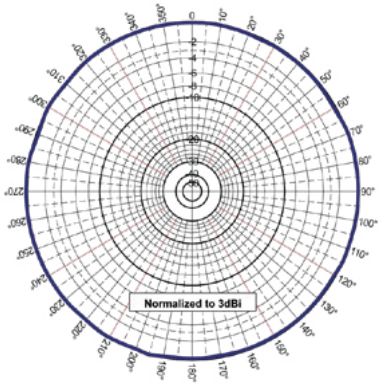

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original

Downloaded from Arrow.com.