MOSFET – P-Channel, POWERTRENCH®

-150 V, -22 A, 53 mΩ

FDMS86263P, FDMS86263P-NC

V_{DS}	$r_{DS(on)}$ MAX	I_D MAX
−150 V	53 mΩ @ −10 V	−22 A
	64 mΩ @ −6 V	

General Description


This P-Channel MOSFET is produced using **onsemi**'s advanced POWERTRENCH technology. This very high density process is especially tailored to minimize on-state resistance and optimized for superior switching performance.

Features

- Max $r_{DS(on)}$ = 53 mΩ at V_{GS} = −10 V, I_D = −4.4 A
- Max $r_{DS(on)}$ = 64 mΩ at V_{GS} = −6 V, I_D = −4 A
- Very Low Rds-on in Mid-Voltage P-Channel Silicon Technology Optimized for Low Qg
- This Product is Optimised for Fast Switching Applications as Well as Load Switch Applications
- 100% UIl Tested
- This Device is Pb-Free and is RoHS Compliant


Applications

- Active Clamp Switch
- Load Switch

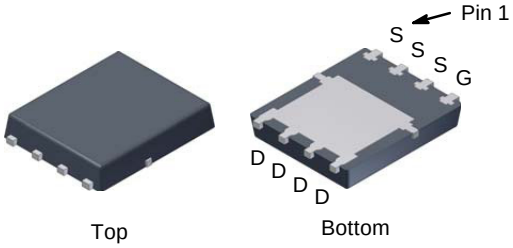


PQFN8 5x6, 1.27P
(Power 56)
CASE 483AE

MARKING DIAGRAM



$Y	= Logo
&Z	= Assembly Plant Code
&2	= 2-Digit Date Code Format
&K	= 2-Digits Lot Run Traceability Code
FDMS86263P	= Specific Device Code

PIN ASSIGNMENT



ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

© Semiconductor Components Industries, LLC, 2014

Downloaded from Arrow.com.

MOSFET MAXIMUM RATINGS (T_A = 25 °C unless otherwise noted)

Symbol	Parameter			Ratings	Unit
V_{DS}	Drain to Source Voltage			−150	V
V_{GS}	Gate to Source Voltage			±25	V
I_D	Drain Current	Continuous	T_C = 25 °C	−22	A
		Continuous (Note 2a)	T_A = 25 °C	−4.4	
		Pulsed		−70	
E_{AS}	Single Pulse Avalanche Energy (Note 1)			384	mJ
P_D	Power Dissipation		T_C = 25 °C	104	W
	Power Dissipation (Note 2a)		T_A = 25 °C	2.5	
T_J, T_{STG}	Operating and Storage Junction Temperature Range			−55 to +150	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Starting T_J = 25 °C; P-ch: L = 3 mH, I_{AS} = −16 A, V_{DD} = −150 V, V_{GS} = −10 V. 100% test at L = 0.1 mH, I_{AS} = −52 A.


THERMAL CHARACTERISTICS

Symbol	Parameter	Ratings	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.2	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 2a)	50	

2. $R_{\theta JA}$ is determined with the device mounted on a 1 in^2 pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



a 50 °C/W when mounted on a 1 in^2 pad of 2 oz copper



b 125 °C/W when mounted on a minimum pad of 2 oz copper

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
BV_{DSS}	Drain to Source Breakdown Voltage	I_D = −250 μA, V_{GS} = 0 V	−150	–	–	V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = −250 μA, referenced to 25 °C	–	−116	–	mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = −120 V, V_{GS} = 0 V	–	–	−1	μA
I_{GSS}	Gate to Source Leakage Current	V_{GS} = ±25 V, V_{DS} = 0 V	–	–	±100	nA
ON CHARACTERISTICS						
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = −250 μA	−2	−2.9	−4	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	I_D = −250 μA, referenced to 25 °C	–	7	–	mV/°C
$r_{DS(on)}$	Static Drain to Source On Resistance	V_{GS} = −10 V, I_D = −4.4 A	–	42	53	mΩ
		V_{GS} = −6 V, I_D = −4 A	–	45	64	
		V_{GS} = −10 V, I_D = −4.4 A, T_J = 125 °C	–	71	94	
g_{FS}	Forward Transconductance	V_{DS} = −10 V, I_D = −4.4 A	–	19	–	S
DYNAMIC CHARACTERISTICS						
C_{iss}	Input Capacitance	V_{DS} = −75 V, V_{GS} = 0 V, f = 1 MHz	–	2935	3905	pF
C_{oss}	Output Capacitance		–	238	315	pF
C_{rss}	Reverse Transfer Capacitance		–	11	20	pF
R_g	Gate Resistance		0.1	2.7	5.4	Ω
SWITCHING CHARACTERISTICS						
$t_{d(on)}$	Turn-On Delay Time	V_{DD} = −75 V, I_D = −4.4 A, V_{GS} = −10 V, R_{GEN} = 6 Ω	–	17	31	ns
t_r	Rise Time		–	10	21	ns
$t_{d(off)}$	Turn-Off Delay Time		–	37	59	ns
t_f	Fall Time		–	14	25	ns
Q_g	Total Gate Charge	V_{GS} = 0 V to −10 V, V_{DD} = −75 V, I_D = −4.4 A	–	45	63	nC
Q_g	Total Gate Charge	V_{GS} = 0 V to −6 V, V_{DD} = −75 V, I_D = −4.4 A	–	29	40	nC
Q_{gs}	Gate to Source Charge	V_{DD} = −75 V, I_D = −4.4 A	–	11.3	–	nC
Q_{gd}	Gate to Drain “Miller” Charge		–	8.9	–	nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
V_{SD}	Source to Drain Diode Forward Voltage	V_{GS} = 0 V, I_S = −4.4 A (Note 3)	–	−0.79	−1.3	V
		V_{GS} = 0 V, I_S = −2 A (Note 3)	–	−0.75	−1.2	
t_{rr}	Reverse Recovery Time	I_F = −4.4 A, di/dt = 100 A/μs	–	91	146	ns
Q_{rr}	Reverse Recovery Charge		–	287	460	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. Pulse Test: Pulse Width < 300 μs, Duty cycle < 2.0%.

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted)

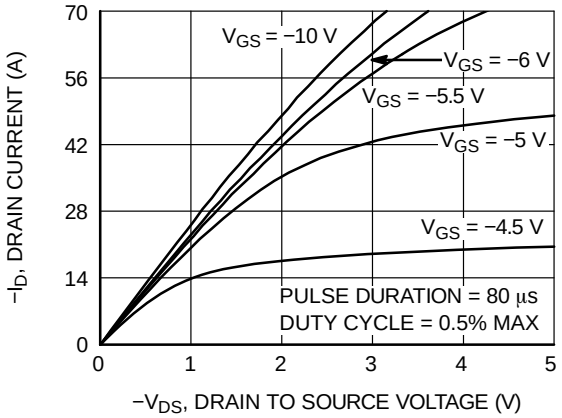


Figure 1. On Region Characteristics

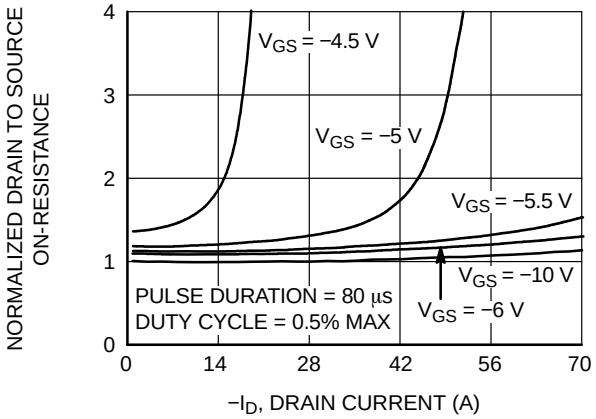


Figure 2. Normalized On-Resistance vs. Drain Current and Gate Voltage

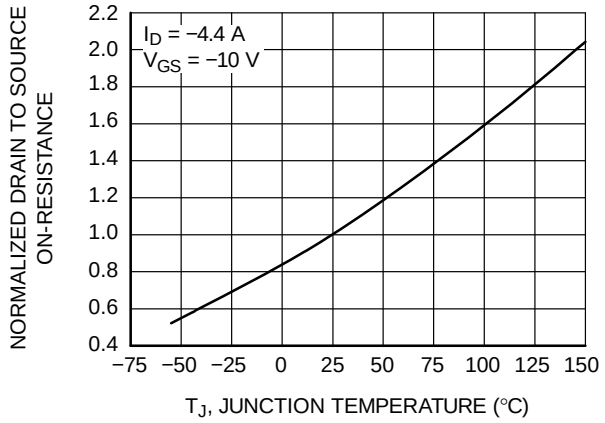


Figure 3. Normalized On-Resistance vs. Junction Temperature

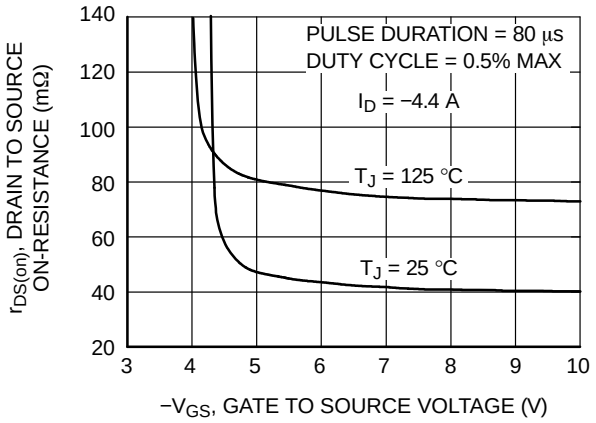


Figure 4. On-Resistance vs. Gate to Source Voltage

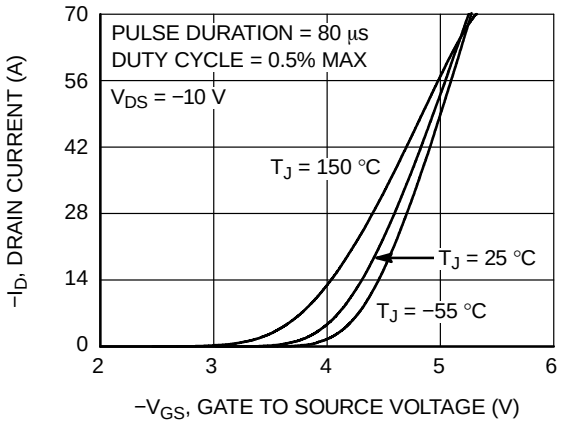


Figure 5. Transfer Characteristics

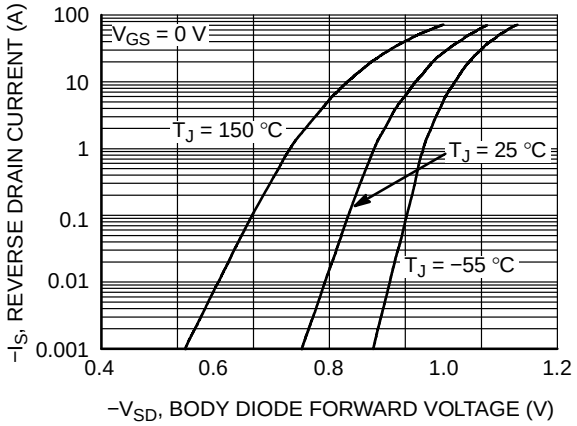


Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted) (continued)

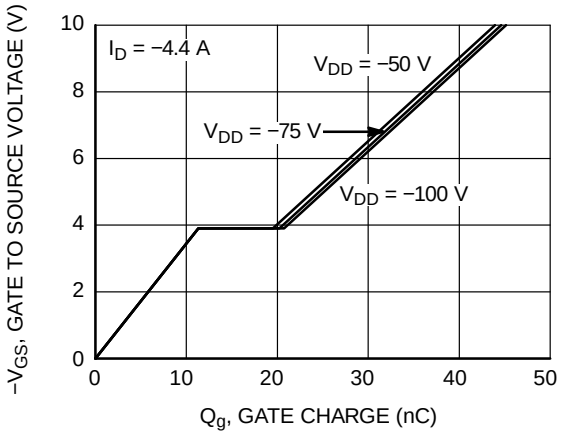


Figure 7. Gate Charge Characteristics

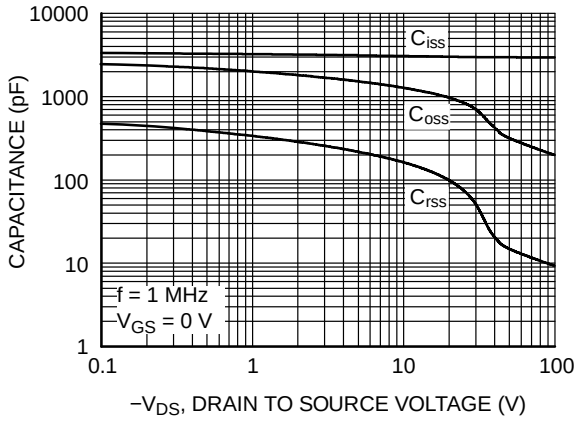


Figure 8. Capacitance vs. Drain to Source Voltage

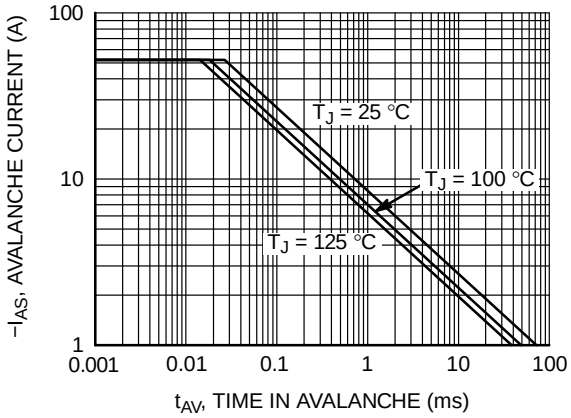


Figure 9. Unclamped Inductive Switching Capability

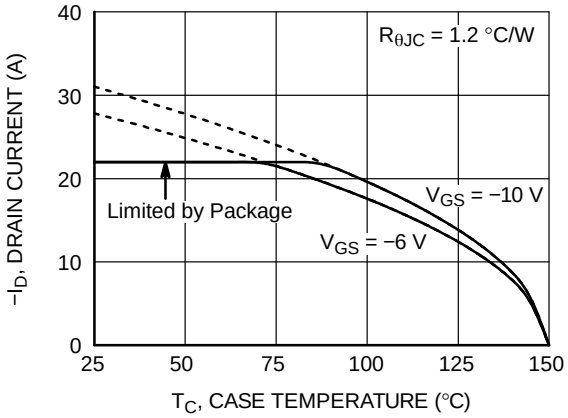


Figure 10. Maximum Continuous Drain Current vs. Case Temperature

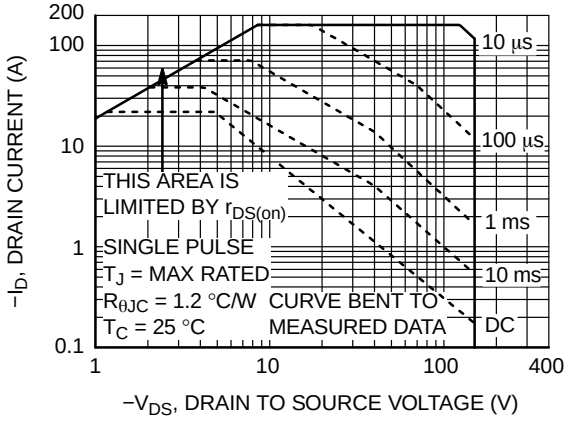


Figure 11. Forward Bias Safe Operating Area

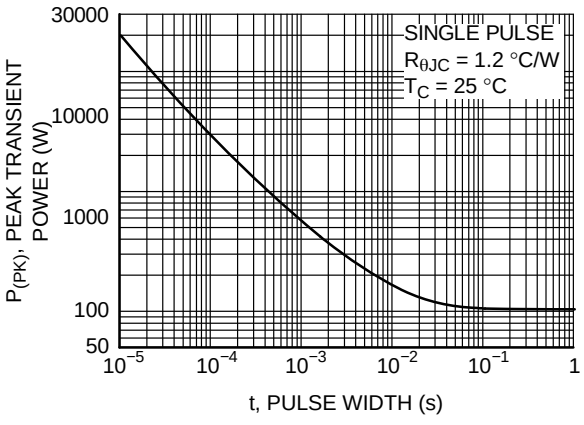


Figure 12. Single Pulse Maximum Power Dissipation

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted) (continued)

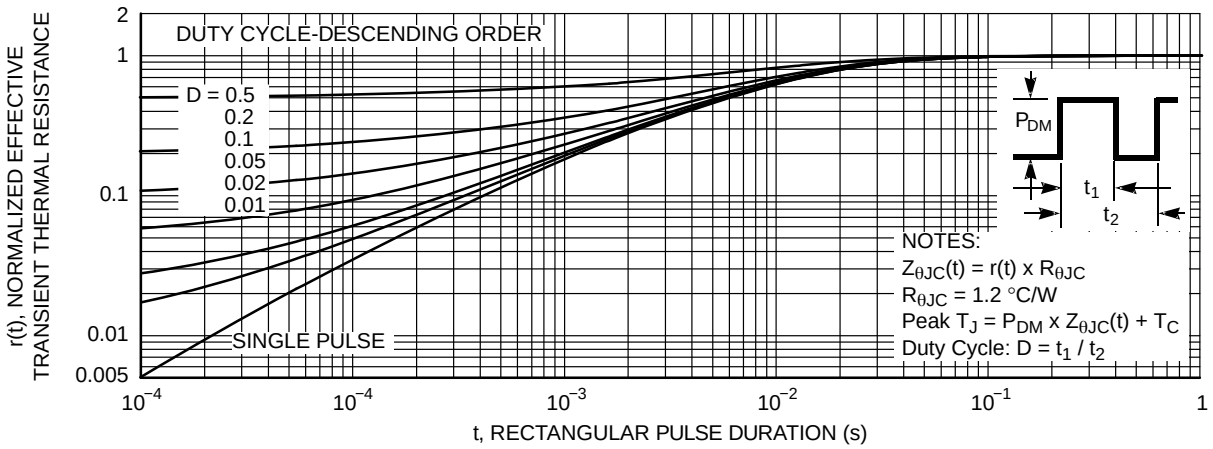


Figure 13. Junction-to-Ambient Transient Thermal Response Curve

PACKAGE MARKING AND ORDERING INFORMATION

Device	Device Marking	Package	Reel Size	Tape Width	Shipping†
FDMS86263P	FDMS86263P	PQFN8 5X6, 1.27P Power 56 (Pb-Free)	13”	12 mm	3000 / Tape & Reel
FDMS86263P-NC					

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

POWERTRENCH is registered trademark of Semiconductor Components Industries, LLC dba “**onsemi**” or its affiliates and/or subsidiaries in the United States and/or other countries.

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.


REVISION HISTORY

Revision	Description of Changes	Date
4	Device FDMS86263P-NC added and made minor formatting updates across the document.	9/7/2026

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.


Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.




PQFN8 5X6, 1.27P
CASE 483AE
ISSUE C


DATE 21 JAN 2022

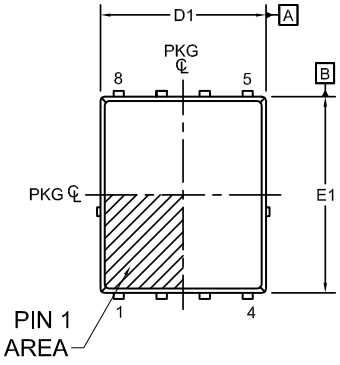


TOP VIEW




OPTIONAL DRAFT
ANGLE MAY APPEAR
ON FOUR SIDES
OF THE PACKAGE



SIDE VIEW

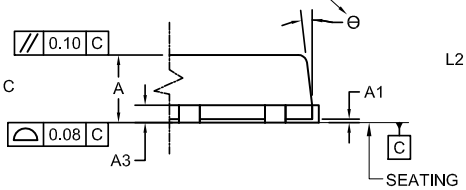

DETAIL C
SCALE: 2:1




DETAIL B
SCALE: 2:1


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. COPLANARITY APPLIES TO THE EXPOSED PADS AS WELL AS THE TERMINALS.
4. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
5. SEATING PLANE IS DEFINED BY THE TERMINALS. "A1" IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.
6. IT IS RECOMMENDED TO HAVE NO TRACES OR VIAS WITHIN THE KEEP OUT AREA.

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.90	1.00	1.10
A1	0.00	-	0.05
b	0.21	0.31	0.41
b1	0.31	0.41	0.51
A3	0.15	0.25	0.35
D	4.90	5.00	5.20
D1	4.80	4.90	5.00
D2	3.61	3.82	3.96
E	5.90	6.15	6.25
E1	5.70	5.80	5.90
E2	3.38	3.48	3.78
E3	0.30 REF		
E4	0.52 REF		
e	1.27 BSC		
e/2	0.635 BSC		
e1	3.81 BSC		
e2	0.50 REF		
L	0.51	0.66	0.76
L2	0.05	0.18	0.30
L4	0.34	0.44	0.54
z	0.34 REF		
Θ	0°	-	12°

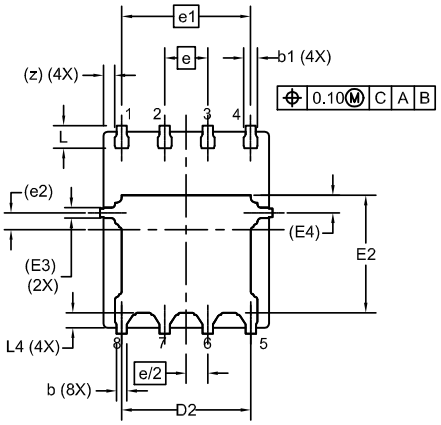

BOTTOM VIEW

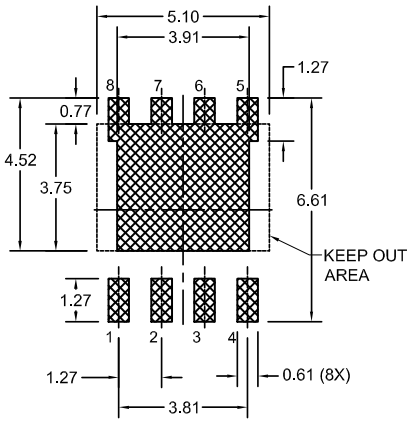

LAND PATTERN
RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DOCUMENT NUMBER:	**98AON13655G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**PQFN8 5X6, 1.27P**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

Downloaded from Arrow.com.

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

◊

Downloaded from Arrow.com.