

# MOSFET - Power, Single N-Channel, μ8FL 30 V, 7.4 mΩ, 47 A NVTFS4C10N

#### **Features**

- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- NVTFS4C10NWF Wettable Flanks Product
- NVT Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS (T<sub>.1</sub> = 25°C unless otherwise stated)

Param	Symbol	Value	Unit		
Drain-to-Source Voltage	$V_{DSS}$	30	V		
Gate-to-Source Voltage			$V_{GS}$	±20	V
Continuous Drain		T <sub>A</sub> = 25°C	I <sub>D</sub>	15.3	Α
Current R <sub>θJA</sub> (Notes 1, 2, 4)		T <sub>A</sub> = 100°C		10.8	
Power Dissipation R <sub>θJA</sub>		T <sub>A</sub> = 25°C	P <sub>D</sub>	3.0	W
(Notes 1, 2, 4)	Steady	T <sub>A</sub> = 100°C		1.5	
Continuous Drain Current R <sub>ψJC</sub>	State	T <sub>C</sub> = 25°C	I <sub>D</sub>	47	Α
(Notes 1, 3, 4)		T <sub>C</sub> = 100°C		33	
Power Dissipation		T <sub>C</sub> = 25°C	$P_{D}$	28	W
R <sub>ψJC</sub> (Notes 1, 3, 4)		T <sub>C</sub> = 100°C		14	
Pulsed Drain Current	T <sub>A</sub> = 25°0	C, t <sub>p</sub> = 10 μs	I <sub>DM</sub>	196	Α
Operating Junction and Storage Temperature Range			T <sub>J</sub> , T <sub>stg</sub>	–55 to +175	°C
Source Current (Body Did	I <sub>S</sub>	53	Α		
Single Pulse Drain-to-Source Avalanche Energy $(T_J = 25^{\circ}C, V_{GS} = 10 \text{ V}, I_L = 10.2 \text{ A}, L = 0.5 \text{ mH})$			E <sub>AS</sub>	26	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			TL	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


#### THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Case (Drain) (Notes 1, 3)	$R_{\psi JC}$	5.4	°C/W
Junction-to-Ambient - Steady State (Notes 1, 2)	$R_{\theta JA}$	50	

- The entire application environment impacts the thermal resistance values shown; they are not constants and are valid for the specific conditions noted.
- 2. Surface-mounted on FR4 board using 650 mm<sup>2</sup>, 2 oz. Cu Pad.
- Assumes heat-sink sufficiently large to maintain constant case temperature independent of device power.
- 4. Continuous DC current rating. Maximum current for pulses as long as one second is higher but dependent on pulse duration and duty cycle.

V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> MAX	I <sub>D</sub> MAX
30 V	7.4 mΩ @ 10 V	47 A
	11 mΩ @ 4.5 V	47.7

#### **N-Channel MOSFET**








WDFN8 (μ8FL) CASE 511AB WDFNW8 (μ8FL WF) CASE 515AN

#### **MARKING DIAGRAM**



4C10 = Specific Device Code for

NVMTS4C10N

WF10 = Specific Device Code of

NVTFS4C10NWF

A = Assembly Location

Y = Year WW = Work Week

= Pb-Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.

Downloaded from Arrow.com.

### **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS							
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$		30			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> /				14.5		mV/°C
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C			1.0	μΑ
		V <sub>DS</sub> = 24 V	T <sub>J</sub> = 125°C			10	
Gate-to-Source Leakage Current	$I_{\mathrm{GSS}}$	$V_{DS} = 0 V, V_{GS}$	<sub>s</sub> = ±20 V			±100	nA
ON CHARACTERISTICS (Note 5)							
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_D$	= 250 μΑ	1.3		2.2	V
Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				-4.5		mV/°C
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V	I <sub>D</sub> = 30 A		5.9	7.4	mΩ
		V <sub>GS</sub> = 4.5 V	I <sub>D</sub> = 15 A		8.8	11	
Forward Transconductance	9 <sub>FS</sub>	V <sub>DS</sub> = 1.5 V, I <sub>E</sub>	<sub>O</sub> = 15 A		43		S
Gate Resistance	$R_{G}$	$T_A = 25^{\circ}$	C		1.0		Ω
CHARGES AND CAPACITANCES							
Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, f = 1 MHz, V <sub>DS</sub> = 15 V			993		pF
Output Capacitance	C <sub>OSS</sub>				574		1
Reverse Transfer Capacitance	C <sub>RSS</sub>				163		
Capacitance Ratio	C <sub>RSS</sub> /C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 15 V, f = 1 MHz			0.164		
Total Gate Charge	Q <sub>G(TOT)</sub>				10.1		nC
Threshold Gate Charge	Q <sub>G(TH)</sub>	1			1.8		1
Gate-to-Source Charge	Q <sub>GS</sub>	V <sub>GS</sub> = 4.5 V, V <sub>DS</sub> = 15 V; I <sub>D</sub> = 30 A			2.6		1
Gate-to-Drain Charge	$Q_GD$				6.1		1
Gate Plateau Voltage	$V_{GP}$	1			3.2		V
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 1	5 V; I <sub>D</sub> = 30 A		19.3		nC
SWITCHING CHARACTERISTICS (Note 6		•					•
Turn-On Delay Time	t <sub>d(ON)</sub>				9.0		ns
Rise Time	t <sub>r</sub>	Vcs = 4.5 V. Vp	e = 15 V.		30		
Turn-Off Delay Time	t <sub>d(OFF)</sub>	$V_{GS} = 4.5 \text{ V}, V_{D}$ $I_{D} = 15 \text{ A}, R_{G}$	$= 3.0 \Omega$		14		1
Fall Time	t <sub>f</sub>	1			7.0		
Turn-On Delay Time	t <sub>d(ON)</sub>				6.0		ns
Rise Time	t <sub>r</sub>	V <sub>GS</sub> = 10 V, V <sub>D</sub>	e = 15 V.		25		1
Turn-Off Delay Time	t <sub>d(OFF)</sub>	$I_D = 15 \text{ A}, R_G = 3.0 \Omega$			18		1
Fall Time	t <sub>f</sub>				4.0		1
DRAIN-SOURCE DIODE CHARACTERIS	TICS						
Forward Diode Voltage	$V_{SD}$	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C		0.80	1.1	V
		$I_{S} = 10 \text{ A}$ $T_{J} = 125^{\circ}\text{C}$			0.67		1
Reverse Recovery Time	t <sub>RR</sub>	0 23 3			23.3		ns
Charge Time	ta	$V_{GS}$ = 0 V, dIS/dt = 100 A/ $\mu$ s, I <sub>S</sub> = 30 A			12.7		1
Discharge Time	t <sub>b</sub>				10.6		1
Reverse Recovery Charge	Q <sub>RR</sub>				8.3		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.

6. Switching characteristics are independent of operating junction temperatures.

#### **TYPICAL CHARACTERISTICS**

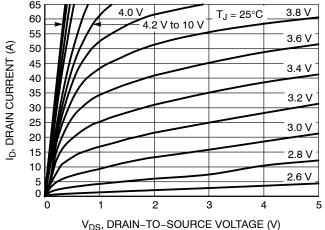


Figure 1. On–Region Characteristics

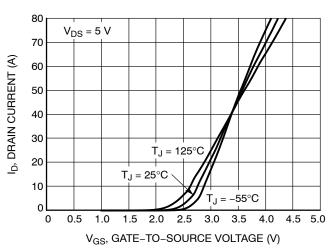


Figure 2. Transfer Characteristics

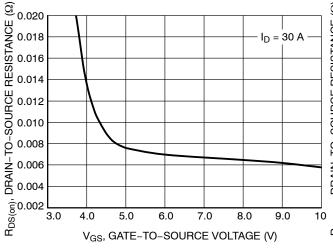


Figure 3. On-Resistance vs. V<sub>GS</sub>

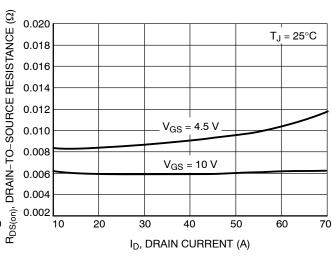


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

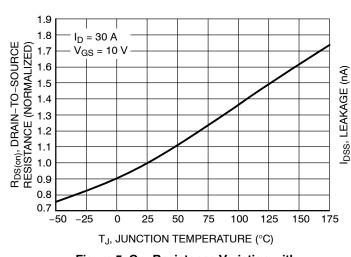


Figure 5. On–Resistance Variation with Temperature

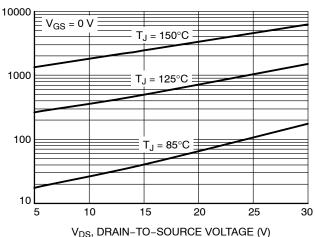


Figure 6. Drain-to-Source Leakage Current vs. Voltage

#### **TYPICAL CHARACTERISTICS**

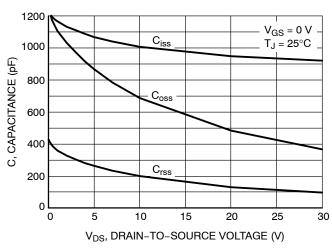


Figure 7. Capacitance Variation

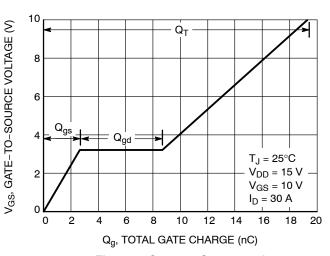


Figure 8. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

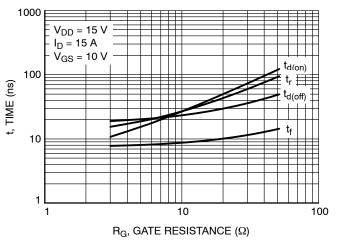


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

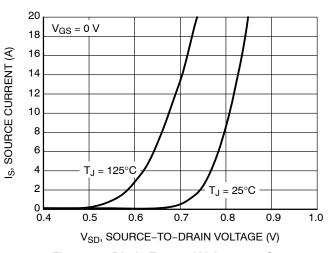


Figure 10. Diode Forward Voltage vs. Current

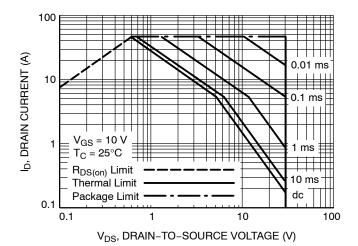


Figure 11. Maximum Rated Forward Biased Safe Operating Area

#### **TYPICAL CHARACTERISTICS**

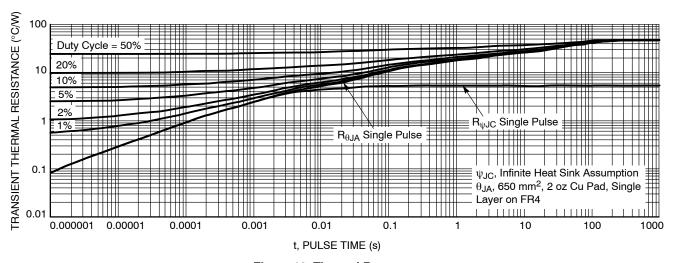


Figure 12. Thermal Response

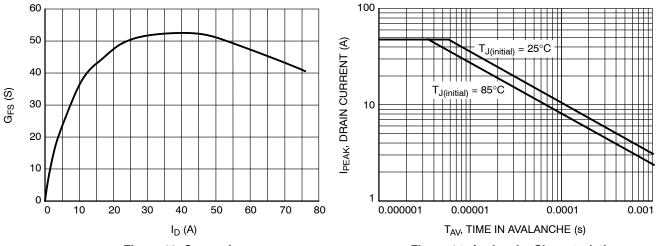


Figure 13. G<sub>FS</sub> vs. I<sub>D</sub>

Figure 14. Avalanche Characteristics

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NVTFS4C10NTAG	WDFN8 (Pb-Free)	1500 / Tape & Reel
NVTFS4C10NWFTAG	WDFNW8 (Pb-Free, Wettable Flanks)	1500 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.






SCALE 2:1

#### WDFN8 3.3x3.3, 0.65P CASE 511AB ISSUE D

**DATE 23 APR 2012** 

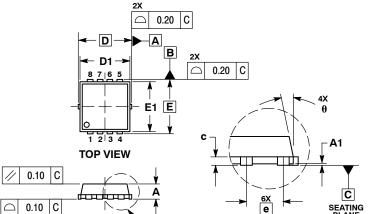


**DETAIL A** 

**DETAIL A** 

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  CONTROLLING DIMENSION: MILLIMETERS.
  DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH
  PROTRUSIONS OR GATE BURRS.

	MILLIMETERS				INCHES	
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.70	0.75	0.80	0.028	0.030	0.031
A1	0.00		0.05	0.000		0.002
b	0.23	0.30	0.40	0.009	0.012	0.016
С	0.15	0.20	0.25	0.006	0.008	0.010
D		3.30 BSC		0	.130 BSC	;
D1	2.95	3.05	3.15	0.116	0.120	0.124
D2	1.98	2.11	2.24	0.078	0.083	0.088
E		3.30 BSC		0	.130 BSC	;
E1	2.95	3.05	3.15	0.116	0.120	0.124
E2	1.47	1.60	1.73	0.058	0.063	0.068
E3	0.23	0.30	0.40	0.009	0.012	0.016
е		0.65 BSC	;	(	0.026 BS	0
G	0.30	0.41	0.51	0.012	0.016	0.020
K	0.65	0.80	0.95	0.026	0.032	0.037
L	0.30	0.43	0.56	0.012	0.017	0.022
L1	0.06	0.13	0.20	0.002	0.005	0.008
М	1.40	1.50	1.60	0.055	0.059	0.063
θ	0 °		12 °	0 °		12 °




#### **GENERIC MARKING DIAGRAM\***

**SIDE VIEW** 



XXXXX = Specific Device Code = Assembly Location

= Year WW = Work Week = Pb-Free Package



DIMENSION: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON30561E	Electronic versions are uncontrolled except when accessed directly from the Document Reposit Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	WDFN8 3.3X3.3, 0.65P		PAGE 1 OF 1	

onsemi and ONSEMI. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.


<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.



## WDFNW8 3.3x3.3, 0.65P (Full-Cut μ8FL WF)

CASE 515AN ISSUE O

**DATE 25 AUG 2020** 

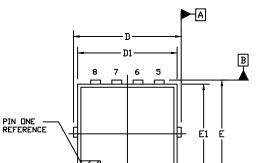



3


TOP VIEW




- 1. DIMENSIONING AND TOLERANCING PERASME Y14.5M, 2009.
- 2. CONTROLLING DIMENSION: MILLIMETERS
- DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.













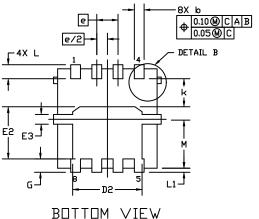

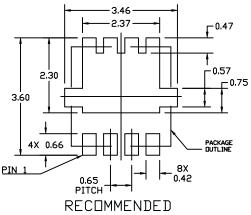

MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# GENERIC MARKING DIAGRAM\*

XXXX AYWW• XXXX = Specific Device Code

A = Assembly Location Y = Year

WW = Work Week

= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

(Note: Microdot may be in either location)

DOCUMENT NUMBER:	98AON24556H	Electronic versions are uncontrolled except when accessed directly from the Document Reposite Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	WDFNW8 3.3x3.3, 0.65P (Full-Cut μ8FL WF)		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales