

NOTES:

THIRD ANGLE PROJ. 

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
C	ADDED COD DRAWING	28-Jul-17	04561	RM




1. MATERIALS AND FINISHES:
- | | |
|-------------|----------------------------------|
| HEX NUT | - BRASS, GOLD PLATING |
| LOCK WASHER | - BRASS, GOLD PLATING |
| BODY | - BRASS, GOLD PLATING |
| CONTACT | - BERYLLIUM COPPER, GOLD PLATING |
| INSULATOR | - PTFE, NATURAL |

2. ELECTRICAL:


- A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: 0-6 GHz
C. D.W.V: 1000 VRMS, MIN.

- ### 3. MECHANICAL:


- A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -55°C TO +155°C

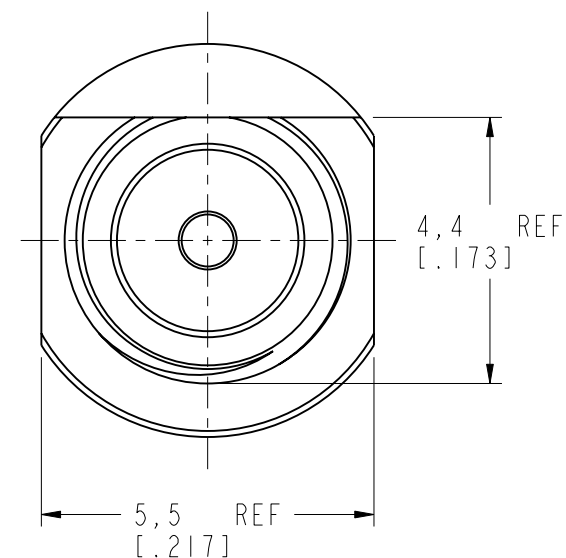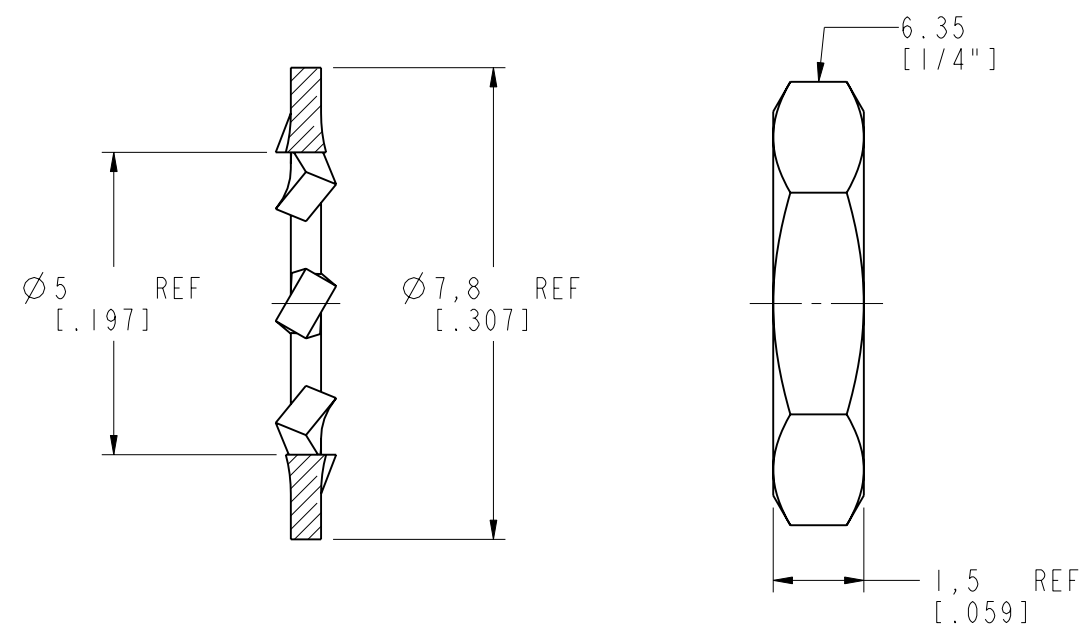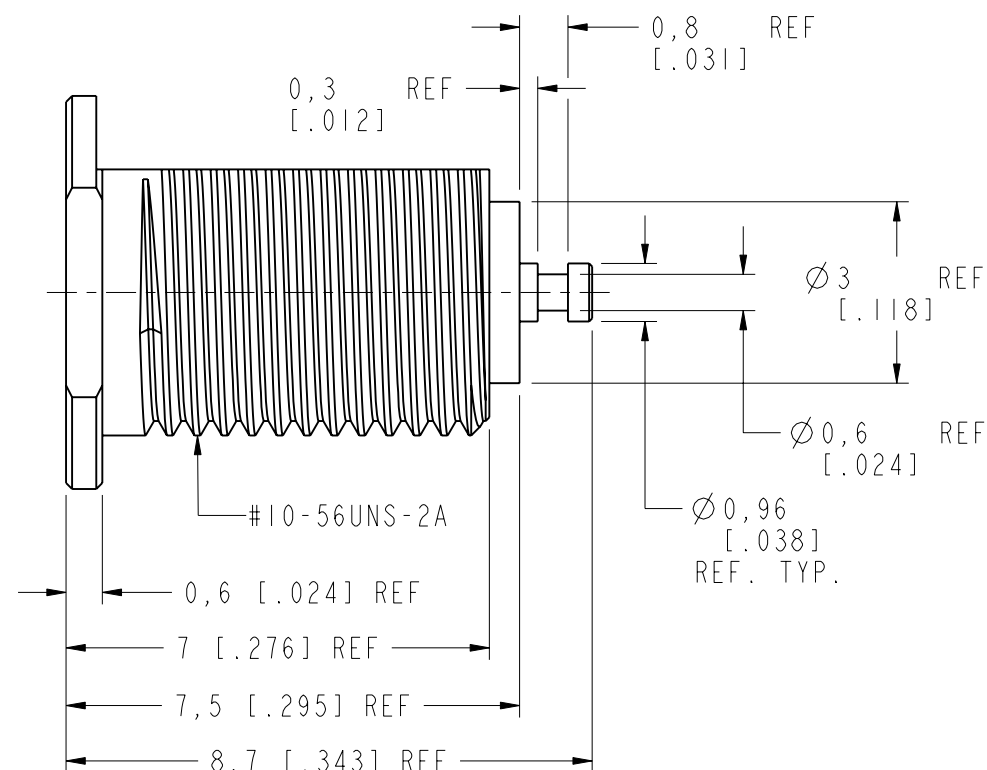

LOCK WASHER & HEX NUT
ARE NOT SHOWN IN THIS VIEW

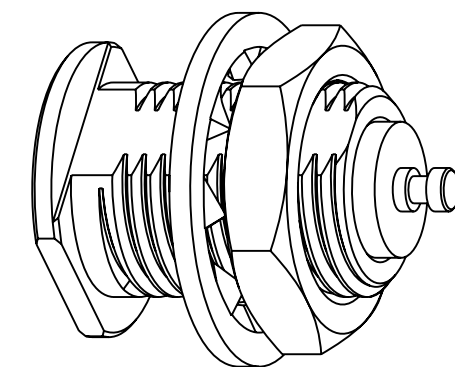

SCALE 6.000

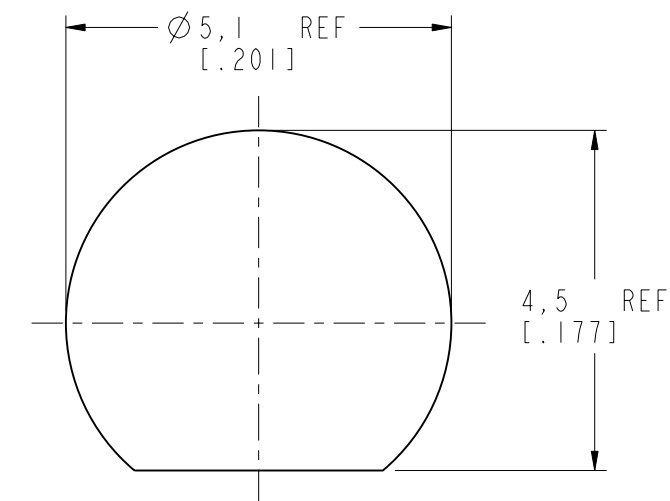

RECOMMENDED
MOUNTING HOLE

SCALE 10,000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ± 0.1mm ± 0.2mm ± 0.3mm ± 1°	MATERIAL	DRAWN R.MAO	DATE 14-Jul-17	TITLE MCX BULKHEAD RECEPT. JACK		Amphenol RF www.amphenolrf.com	
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	-	ENGINEER R.MAO	DATE 14-Jul-17			DRAWING NO. MCX6351B9-3GT30G-50	
	REFERENCE AND	APPROVED S.HSIEH	DATE 28-Jul-17	SCALE: 8.0:1.0	SHEET 2 OF 2	ITEM NO. 086351AAA1IGE5F	
	CONFIGURATION LEVEL: In Work	CAD FILE	DWG SIZE B		REV C	PART NO. 252133	
	FINISH						