

MOSFET – Single, N-Channel, POWERTRENCH®

80 V, 6 A, 36.5 m Ω

FDMA037N08LC

Description

This device has been designed to provide maximum efficiency and thermal performance for synchronous buck converters. The low $R_{DS(on)}$ and gate charge provide excellent switching performance.

Features


- PTNG MOSFET Technology
- Max $R_{DS(on)} = 36.5 \text{ m}\Omega$ at $V_{GS} = 10 \text{ V}$, $I_D = 4 \text{ A}$
- Max $R_{DS(on)} = 56.9 \text{ m}\Omega$ at $V_{GS} = 4.5 \text{ V}$, $I_D = 3 \text{ A}$
- 5 V Drive Capable
- 50% Lower Q_{rr} than Other MOSFET Suppliers
- Lower Switching Noise/EMI
- Low Profile 0.8 mm Maximum in the New Package MicroFET[™]
 2x2 mm
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant


Typical Applications

• DC-DC Buck Converters

| V _{DS} | R _{DS(on)} MAX | I _{D MAX} | | |
|-----------------|-------------------------|--------------------|--|--|
| 80 V | 36.5 mΩ @ 10 V | 6 A | | |

Single N-Channel





MicroFET 2X2 (Bottom View)

WDFN6 2x2, 0.65P

CASE 511DB

MARKING DIAGRAM

&Z&2&K 037L

&Z = Assembly Plant Code &2 = Numeric Date Code &K = Lot Code 037L = Specific Device Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

MOSFET MAXIMUM RATINGS ($T_A = 25$ °C, Unless otherwise specified)

| Symbol | Parameter | Ratings | Unit |
|-----------------------------------|---|-------------|------|
| V _{DS} | Drain to Source Voltage | 80 | V |
| V _{GS} | Gate to Source Voltage | ±20 | V |
| I _D | Continuous T _A = 25°C (Note 1a) | 6 | Α |
| | Pulsed | 55 | |
| P _D | Power Dissipation T _A = 25°C (Note 1a) | 2.4 | W |
| | Power Dissipation T _A = 25°C (Note 1b) | 0.9 | |
| T _J , T _{STG} | Operating and Storage Junction Temperature Range | -55 to +150 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

| Symbol | Parameter | Ratings | Unit |
|----------------|---|---------|------|
| $R_{	heta JA}$ | Thermal Resistance, Junction to Ambient (Note 1a) | 52 | °C/W |
| $R_{	hetaJA}$ | Thermal Resistance, Junction to Ambient (Note 1b) | 145 | |

PACKAGE MARKING AND ORDERING INFORMATION

| Device Marking | Device | Package | Reel Size | Tape Width | Shipping (Qty / Packing) [†] |
|----------------|--------------|--|-----------|------------|---------------------------------------|
| 037L | FDMA037N08LC | WDFN6 2x2, 0.65P (MicroFET) (Pb-Free/Halogen Free) | 7" | 8 mm | 3000 / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}C$ unless otherwise noted)

| Symbol | Parameter | Test Conditions | Min | Тур | Max | Unit |
|--|---|--|-----|------|------|-------|
| OFF CHARA | ACTERISTICS | | • | | • | |
| BV _{DSS} | Drain to Source Breakdown Voltage | $I_D = 250 \mu A, V_{GS} = 0 V$ | 80 | _ | - | V |
| $\frac{\Delta BV_{DSS}}{\Delta T_{J}}$ | Breakdown Voltage Temperature Coefficient | I_D = 250 μ A, referenced to 25°C | - | 69 | _ | mV/°C |
| I _{DSS} | Zero Gate Voltage Drain Current | V _{DS} = 64 V, V _{GS} = 0 V | - | - | -1 | μΑ |
| I _{GSS} | Gate to Source Leakage Current | $V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$ | - | - | ±1 | μΑ |
| ON CHARA | CTERISTICS | | | | | |
| V _{GS(th)} | Gate to Source Threshold Voltage | $V_{GS} = V_{DS}$, $I_D = 20 \mu A$ | 1.0 | 1.3 | 2.5 | V |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate to Source Threshold Voltage Temperature Coefficient | I_D = 20 μ A, referenced to 25°C | - | -5 | - | mV/°C |
| R _{DS(on)} | Static Drain to Source On Resistance | V _{GS} = 10 V, I _D = 4 A | - | 30.9 | 36.5 | mΩ |
| | | V _{GS} = 4.5 V, I _D = 3 A | - | 42.1 | 56.9 | |
| | | V _{GS} = 10 V, I _D = 4 A, T _J = 125°C | - | 51.4 | 61 | |
| 9FS | Forward Transconductance | V _{DD} = 5 V, I _D = 4 A | - | 15 | - | S |
| DYNAMIC C | HARACTERISTICS | | | | _ | |
| C _{iss} | Input Capacitance | V _{DS} = 40 V, V _{GS} = 0 V, f = 1 MHz | - | 425 | 595 | pF |
| C _{oss} | Output Capacitance | 1 | - | 110 | 155 | pF |
| C _{rss} | Reverse Transfer Capacitance | 1 | - | 6.0 | 8.3 | pF |

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

| Parameter | Test Conditions | Min | Тур | Max | Unit | | |
|-------------------------------|--|--|--|-----|------|--|--|
| WITCHING CHARACTERISTICS | | | | | | | |
| Turn-on Delay Time | $V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}, V_{GS} = 10 \text{ V},$ | - | 4.9 | 10 | ns | | |
| Rise Time | H _{GEN} = 6 \$2 | - | 1.3 | 10 | | | |
| Turn-off Delay Time | | - | 14 | 24 | 1 | | |
| Fall Time | | - | 1.7 | 10 | 1 | | |
| Total Gate Charge | V_{GS} = 0V to 10 V, V_{DD} = 40 V, I_D = 4 A | - | 6.5 | 9.0 | nC | | |
| Total Gate Charge | V_{GS} = 0V to 4.5 V, V_{DD} = 40 V, I_D = 4 A | - | 3.2 | 4.5 | nC | | |
| Gate to Source Charge | V _{DD} = 40 V, I _D = 4 A | - | 0.9 | - | nC | | |
| Gate to Drain "Miller" Charge | V _{DD} = 40 V, I _D = 4 A | - | 0.9 | _ | nC | | |
| Output Charge | V _{DD} = 40 V, V _{GS} = 0 V | - | 6.4 | _ | nC | | |
| Total Gate Charge Sync | V _{DS} = 0 V, I _D = 4 A | _ | 5.9 | - | nC | | |
| | Turn-on Delay Time Rise Time Turn-off Delay Time Fall Time Total Gate Charge Total Gate Charge Gate to Source Charge Gate to Drain "Miller" Charge Output Charge | GCHARACTERISTICSTurn-on Delay Time $V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}, V_{GS} = 10 \text{ V},$ Rise Time $R_{GEN} = 6 \Omega$ Turn-off Delay Time $V_{GS} = 0 \text{ V} \text{ to } 10 \text{ V}, V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}$ Total Gate Charge $V_{GS} = 0 \text{ V} \text{ to } 10 \text{ V}, V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}$ Total Gate Charge $V_{CS} = 0 \text{ V} \text{ to } 4.5 \text{ V}, V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}$ Gate to Source Charge $V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}$ Gate to Drain "Miller" Charge $V_{DD} = 40 \text{ V}, V_{GS} = 0 \text{ V}$ | CHARACTERISTICSTurn-on Delay Time $V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}, V_{GS} = 10 \text{ V},$ -Rise TimeTurn-off Delay TimeFall TimeTotal Gate Charge $V_{GS} = 0V \text{ to } 10 \text{ V}, V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}$ -Total Gate Charge $V_{GS} = 0V \text{ to } 4.5 \text{ V}, V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}$ -Gate to Source Charge $V_{DD} = 40 \text{ V}, I_D = 4 \text{ A}$ -Gate to Drain "Miller" Charge $V_{DD} = 40 \text{ V}, V_{GS} = 0 \text{ V}$ -Output Charge $V_{DD} = 40 \text{ V}, V_{GS} = 0 \text{ V}$ - | | | | |

DRAIN-SOURCE DIODE CHARACTERISTICS

| V_{SD} | Source to Drain Diode Forward Voltage | V _{GS} = 0 V, I _S = 2 A (Note 2) | - | 0.8 | 1.2 | V |
|-----------------|---------------------------------------|--|---|-----|-----|----|
| | | V _{GS} = 0 V, I _S = 4 A (Note 2) | - | 8.0 | 1.3 | V |
| t _{rr} | Reverse Recovery Time | I _F = 2 A, di/dt = 300 A/μs | _ | 10 | 20 | ns |
| Q _{rr} | Reverse Recovery Charge | | - | 9 | 14 | nC |
| t _{rr} | Reverse Recovery Time | I _F = 2 A, di/dt = 1000 A/μs | - | 8 | 16 | ns |
| Q _{rr} | Reverse Recovery Charge | | - | 26 | 51 | nC |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOTES

1. $R_{\theta JA}$ is determined with the device mounted on a 1 in² pad 2 oz copper pad on a 1.5 × 1.5 in. board of FR-4 material. $R_{\theta JC}$ is guaranteed by design while $R_{\theta JA}$ is determined by the user's board design.



 a) 52°C/W when mounted on a 1 in² pad of 2 oz copper.



b) 145°C/W when mounted on a minimum pad of 2 oz copper.

- 2. Pulse Test: Pulse Width < 300 μ s, Duty cycle < 2.0%.
- 3. The diode connected between the gate and source serves only as protection against ESD. No gate overvoltage rating is implied.

TYPICAL CHARACTERISTICS (T_J = 25°C UNLESS OTHERWISE NOTED)

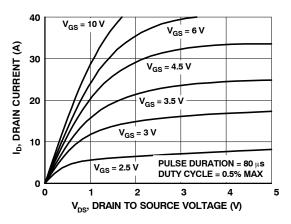


Figure 1. On Region Characteristics

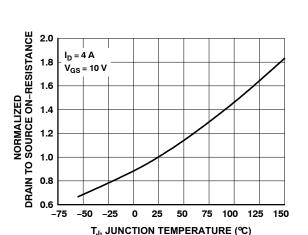


Figure 3. Normalized On Resistance vs. Junction Temperature

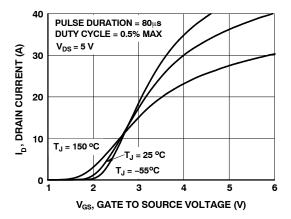


Figure 5. Transfer Characteristics

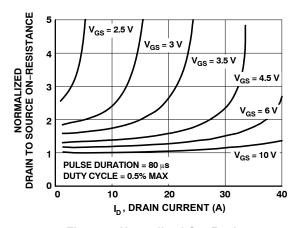


Figure 2. Normalized On-Resistance vs. Drain Current and Gate Voltage

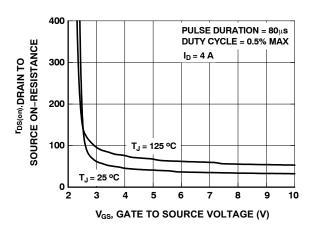


Figure 4. On-Resistance vs. Gate to Source Voltage

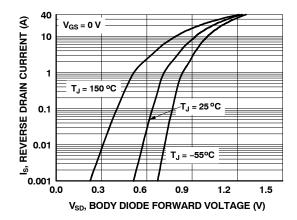


Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

TYPICAL CHARACTERISTICS (CONTINUED)

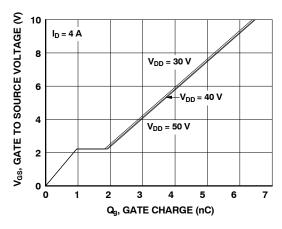


Figure 7. Gate Charge Characteristics

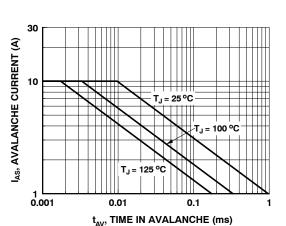


Figure 9. Unclamped Inductive Switching Capability

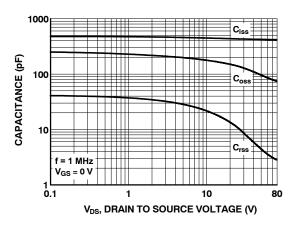


Figure 8. Capacitance vs. Drain to Source Voltage

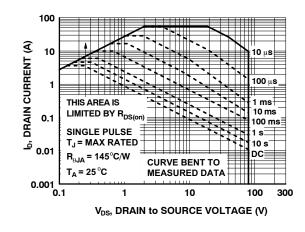


Figure 10. Forward Bias Safe Operating Area

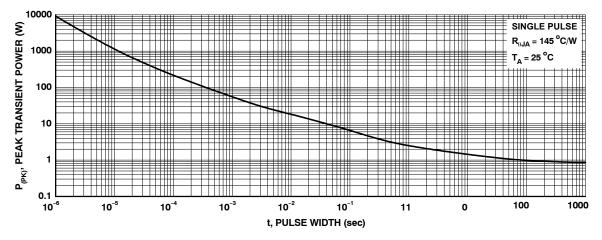


Figure 11. Single Pulse Maximum Power Dissipation

TYPICAL CHARACTERISTICS (CONTINUED)

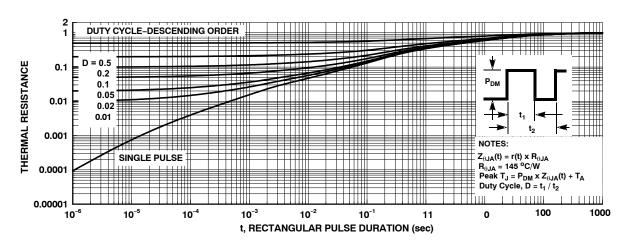



Figure 12. Junction-to-Case Transient Thermal Response Curve


POWERTRENCH is registered trademark and MicroFET is a trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.




WDFN6 2x2, 0.65P CASE 511DB ISSUE O


DATE 31 AUG 2016

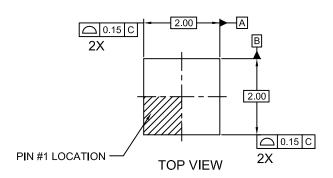


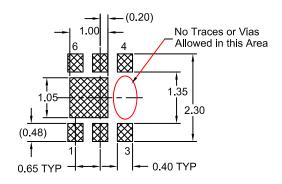

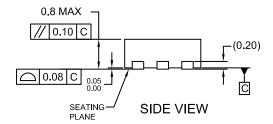

RECOMMENDED LAND PATTERN OPT 1

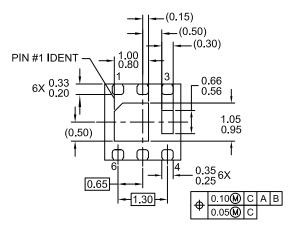



BOTTOM VIEW

RECOMMENDED LAND PATTERN OPT 2

NOTES:

- A. DOES NOT FULLY CONFORM TO JEDEC REGISTRATION MO-229 DATED AUG/2003
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994

| DOCUMENT NUMBER: | 98AON13617G | Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | | |
|------------------|------------------|--|-------------|--|--|
| DESCRIPTION: | WDFN6 2X2, 0.65P | | PAGE 1 OF 1 | | |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales