

# NB6L572M

## 2.5V / 3.3V Differential 4:1 Mux to 1:2 CML Clock/Data Fanout / Translator

### Multi-Level Inputs w/ Internal Termination

#### Description

The NB6L572M is a high performance differential 4:1 Clock / Data input multiplexer and a 1:2 CML Clock / Data fanout buffer that operates up to 6 GHz / 8 Gbps respectively with a 2.5 V or 3.3 V power supply.

The differential Clock / Data inputs have internal 50  $\Omega$  termination resistors and will accept differential LVPECL, CML, or LVDS logic levels. The NB6L572M incorporates a pair of Select pins that will choose one of four differential inputs and will produce two identical CML output copies of Clock or Data.

As such, the NB6L572M is ideal for SONET, GigE, Fiber Channel, Backplane and other Clock/Data distribution applications.

The two differential CML outputs will swing 400 mV when externally loaded and terminated with a 50  $\Omega$  resistor to  $V_{CC}$  and are optimized for low skew and minimal jitter.

The NB6L572M is offered in a low profile 5x5mm 32-pin QFN Pb-Free package. Application notes, models, and support documentation are available at [www.onsemi.com](http://www.onsemi.com). The NB6L572M is a member of the ECLinPS MAX™ family of high performance clock products.


#### Features

- Input Data Rate > 8 Gb/s Typical
- Data Dependent Jitter < 10 ps
- Maximum Input Clock Frequency > 6 GHz Typical
- Random Clock Jitter < 0.8 ps RMS
- Low Skew 1:2 CML Outputs, < 15 ps max
- 4:1 Multi-Level Mux Inputs, accepts LVPECL, CML, LVDS
- 200 ps Typical Propagation Delay
- 35 ps Typical Rise and Fall Times
- Differential CML Outputs, 400 mV Peak-to-Peak, Typical
- Operating Range:  $V_{CC}$  = 2.375 V to 3.6 V with  $GND = 0$  V
- Internal 50  $\Omega$  Input Termination Resistors
- $V_{REFAC}$  Reference Output
- QFN-32 Package, 5mm x 5mm
- 40°C to +85°C Ambient Operating Temperature
- These are Pb-Free Devices




ON Semiconductor®

<http://onsemi.com>



QFN32  
MN SUFFIX  
CASE 488AM

#### MARKING DIAGRAM



|    |                     |
|----|---------------------|
| A  | = Assembly Location |
| WL | = Wafer Lot         |
| YY | = Year              |
| WW | = Work Week         |
| ▪  | = Pb-Free Package   |

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering and shipping information on page 8 of this data sheet.

# NB6L572M

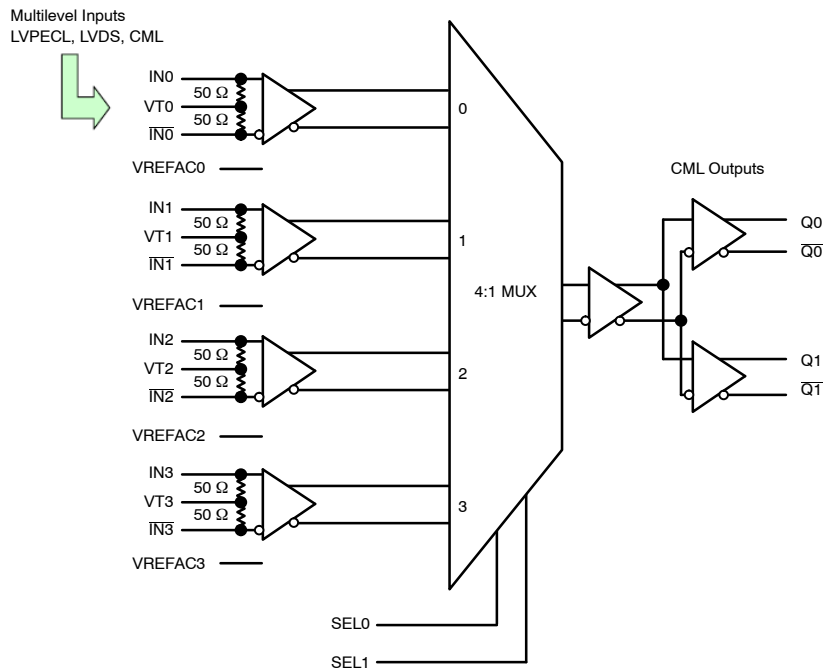


Figure 1. Simplified Block Diagram

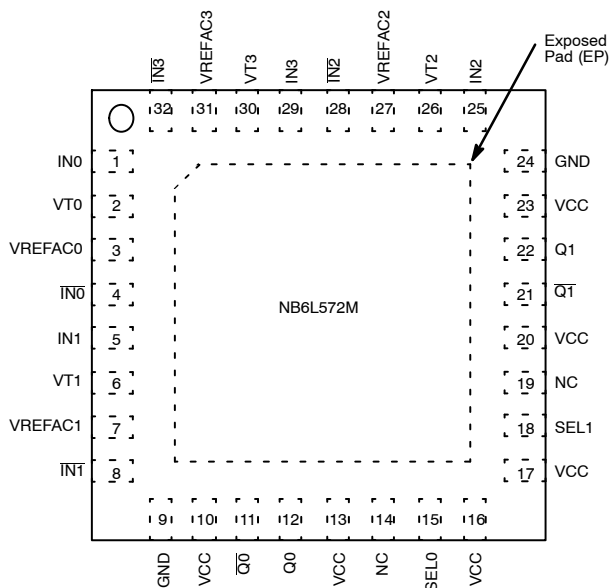


Figure 2. Pinout: QFN-32 (Top View)

Table 1. INPUT SELECT FUNCTION TABLE

| SEL1* | SEL0* | Clock / Data Input Selected |
|-------|-------|-----------------------------|
| 0     | 0     | IN0 Input Selected          |
| 0     | 1     | IN1 Input Selected          |
| 1     | 0     | IN2 Input Selected          |
| 1     | 1     | IN3 Input Selected          |

\*Defaults HIGH when left open.

# NB6L572M

**Table 2. PIN DESCRIPTION**

| Pin Number                       | Pin Name                                                                                                                     | I/O                        | Pin Description                                                                                                                                                                                                                                                                     |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 4<br>5, 8<br>25, 28<br>29, 32 | IN0, $\overline{\text{IN0}}$<br>IN1, $\overline{\text{IN1}}$<br>IN2, $\overline{\text{IN2}}$<br>IN3, $\overline{\text{IN3}}$ | LVPECL, CML,<br>LVDS Input | Non-inverted, Inverted, Differential Clock or Data Inputs                                                                                                                                                                                                                           |
| 2, 6<br>26, 30                   | VT0, VT1<br>VT2, VT3                                                                                                         |                            | Internal 100 $\Omega$ Center-tapped Termination Pin for INx/ $\overline{\text{INx}}$                                                                                                                                                                                                |
| 15<br>18                         | SEL0<br>SEL1                                                                                                                 | LVTTTL/LVCMOS<br>Input     | Input Select pins, default HIGH when left open through a 131 k $\Omega$ pullup resistor. Input logic threshold is $V_{CC}/2$ . See Select Function, Table 1.                                                                                                                        |
| 14, 19                           | NC                                                                                                                           | –                          | No Connect                                                                                                                                                                                                                                                                          |
| 10, 13, 16<br>17, 20, 23         | VCC                                                                                                                          | –                          | Positive Supply Voltage. All VCC pins must be connected to the positive power supply for correct DC and AC operation.                                                                                                                                                               |
| 11, 12<br>21, 22                 | $\overline{\text{Q0}}$ , Q0<br>$\overline{\text{Q1}}$ , Q1                                                                   | CML Output                 | Non-inverted, Inverted Differential Outputs.                                                                                                                                                                                                                                        |
| 9, 24                            | GND                                                                                                                          |                            | Negative Supply Voltage, connected to Ground                                                                                                                                                                                                                                        |
| 3<br>7<br>27<br>31               | VREF-AC0<br>VREF-AC1<br>VREF-AC2<br>VREF-AC3                                                                                 | –                          | Output Voltage Reference for Capacitor-Coupled Inputs                                                                                                                                                                                                                               |
| –                                | EP                                                                                                                           | –                          | The Exposed Pad (EP) on the QFN-32 package bottom is thermally connected to the die for improved heat transfer out of package. The exposed pad must be attached to a heat-sinking conduit. The pad is electrically connected to the die, and must be electrically connected to GND. |

1. In the differential configuration when the input termination pins (VT0, VT1, VT2, VT3) are connected to a common termination voltage or left open, and if no signal is applied on INx/ $\overline{\text{INx}}$  input, then the device will be susceptible to self-oscillation.
2. All VCC, and GND pins must be externally connected to a power supply for proper operation.

# NB6L572M

**Table 3. ATTRIBUTES**

| Characteristics                                        | Value                |
|--------------------------------------------------------|----------------------|
| ESD Protection Human Body Model<br>Machine Model       | > 2 kV<br>> 200 V    |
| R <sub>PU</sub> – SELx Input Pull-up Resistor          | 131 kΩ               |
| Moisture Sensitivity (Note 3) QFN-32                   | Level 1              |
| Flammability Rating Oxygen Index: 28 to 34             | UL 94 V-0 @ 0.125 in |
| Transistor Count                                       | 275                  |
| Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test |                      |

3. For additional information, see Application Note AND8003/D.

**Table 4. MAXIMUM RATINGS**

| Symbol              | Parameter                                                    | Condition 1        | Condition 2    | Rating                       | Unit |
|---------------------|--------------------------------------------------------------|--------------------|----------------|------------------------------|------|
| V <sub>CC</sub>     | Positive Power Supply                                        | GND = 0 V          |                | –0.5 V to +4.0               | V    |
| V <sub>IN</sub>     | Positive Input Voltage                                       | GND = 0 V          |                | –0.5 to V <sub>CC</sub> +0.5 | V    |
| V <sub>INPP</sub>   | Differential Input Voltage  I <sub>N</sub> – I <sub>Nx</sub> |                    |                | 1.89                         | V    |
| I <sub>out</sub>    | Output Current Through R <sub>T</sub> (50 Ω Resistor)        |                    |                | ± 40                         | mA   |
| I <sub>IN</sub>     | Input current Through RT (50 Ω resistor)                     |                    |                | ± 40                         | mA   |
| I <sub>VREFAC</sub> | VREFAC Sink or Source Current                                |                    |                | ± 1.5                        | mA   |
| T <sub>A</sub>      | Operating Temperature Range                                  |                    |                | –40 to +85                   | °C   |
| T <sub>stg</sub>    | Storage Temperature Range                                    |                    |                | –65 to +150                  | °C   |
| θ <sub>JA</sub>     | Thermal Resistance (Junction-to-Ambient) (Note 4)            | 0 lfpm<br>500 lfpm | QFN32<br>QFN32 | 31<br>27                     | °C/W |
| θ <sub>JC</sub>     | Thermal Resistance (Junction-to-Case) (Note 4)               |                    | QFN32          | 12                           | °C/W |
| T <sub>sol</sub>    | Wave Solder                                                  | ≤ 20 sec           |                | 265                          | °C   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

4. JEDEC standard multilayer board – 2S2P (2 signal, 2 power) with 8 filled thermal vias under exposed pad.

# NB6L572M

**Table 5. DC CHARACTERISTICS CML OUTPUT**  $V_{CC} = 2.375 \text{ V to } 3.6 \text{ V}$ ,  $GND = 0 \text{ V}$ ,  $T_A = -40^\circ\text{C to } +85^\circ\text{C}$  (Note 5)

| Symbol | Characteristic | Min | Typ | Max | Unit |
|--------|----------------|-----|-----|-----|------|
|--------|----------------|-----|-----|-----|------|

## POWER SUPPLY

|          |                                                                |                                                      |              |            |              |    |
|----------|----------------------------------------------------------------|------------------------------------------------------|--------------|------------|--------------|----|
| $V_{CC}$ | Power Supply Voltage                                           | $V_{CC} = 3.3 \text{ V}$<br>$V_{CC} = 2.5 \text{ V}$ | 3.0<br>2.375 | 3.3<br>2.5 | 3.6<br>2.625 | V  |
| $I_{CC}$ | Power Supply Current for $V_{CC}$<br>(Inputs and Outputs Open) | $V_{CC} = 3.3 \text{ V}$<br>$V_{CC} = 2.5 \text{ V}$ |              | 130<br>115 | 165<br>150   | mA |

## CML OUTPUTS (Note 6)

|          |                     |                                                      |                                                  |                                                  |                                                  |    |
|----------|---------------------|------------------------------------------------------|--------------------------------------------------|--------------------------------------------------|--------------------------------------------------|----|
| $V_{OH}$ | Output HIGH Voltage | $V_{CC} = 3.3 \text{ V}$<br>$V_{CC} = 2.5 \text{ V}$ | $V_{CC} - 30$<br>3270<br>2470                    | $V_{CC} - 10$<br>3290<br>2490                    | $V_{CC}$<br>3300<br>2500                         | mV |
| $V_{OL}$ | Output LOW Voltage  | $V_{CC} = 3.3 \text{ V}$<br>$V_{CC} = 2.5 \text{ V}$ | $V_{CC} - 650$<br>2650<br>$V_{CC} - 650$<br>1850 | $V_{CC} - 450$<br>2850<br>$V_{CC} - 450$<br>2050 | $V_{CC} - 300$<br>3000<br>$V_{CC} - 300$<br>2200 | mV |

## DIFFERENTIAL CLOCK INPUTS DRIVEN SINGLE-ENDED (Figures 5 & 6) (Note 8)

|           |                                                  |                |  |                |    |
|-----------|--------------------------------------------------|----------------|--|----------------|----|
| $V_{IH}$  | Single-ended Input HIGH Voltage                  | $V_{th} + 100$ |  | $V_{CC}$       | mV |
| $V_{IL}$  | Single-ended Input LOW Voltage                   | GND            |  | $V_{th} - 100$ | mV |
| $V_{th}$  | Input Threshold Reference Voltage Range (Note 8) | 1100           |  | $V_{CC} - 100$ | mV |
| $V_{ISE}$ | Single-ended Input Voltage ( $V_{IH} - V_{IL}$ ) | 200            |  | 1200           | mV |

## VREFAC

|              |                                                   |      |                 |                 |    |
|--------------|---------------------------------------------------|------|-----------------|-----------------|----|
| $V_{REF-AC}$ | Output Reference Voltage (100 $\mu\text{A}$ Load) | 1050 | $V_{CC} - 1250$ | $V_{CC} - 1050$ | mV |
|--------------|---------------------------------------------------|------|-----------------|-----------------|----|

## DIFFERENTIAL INPUTS DRIVEN DIFFERENTIALLY (Figures 7 & 8) (Note 9)

|           |                                                                                  |      |  |                 |               |
|-----------|----------------------------------------------------------------------------------|------|--|-----------------|---------------|
| $V_{IHD}$ | Differential Input HIGH Voltage ( $I_N, \overline{I_N}$ )                        | 1200 |  | $V_{CC}$        | mV            |
| $V_{ILD}$ | Differential Input LOW Voltage ( $I_N, \overline{I_N}$ )                         | 0    |  | $V_{IHD} - 100$ | mV            |
| $V_{ID}$  | Differential Input Voltage ( $I_N, \overline{I_N}$ ) ( $V_{IHD} - V_{ILD}$ )     | 100  |  | 1200            | mV            |
| $V_{CMR}$ | Input Common Mode Range (Differential Configuration, Note 10) (Figure 9)         | 1050 |  | $V_{CC} - 50$   | mV            |
| $I_{IH}$  | Input HIGH Current $I_N / \overline{I_N}$ ( $V_{TIN} / \overline{V_{TIN}}$ Open) | -150 |  | 150             | $\mu\text{A}$ |
| $I_{IL}$  | Input LOW Current $I_N / \overline{I_N}$ ( $V_{TIN} / \overline{V_{TIN}}$ Open)  | -150 |  | 150             | $\mu\text{A}$ |

## CONTROL INPUT (SELx Pin)

|          |                                    |                      |  |                      |               |
|----------|------------------------------------|----------------------|--|----------------------|---------------|
| $V_{IH}$ | Input HIGH Voltage for Control Pin | $V_{CC} \times 0.65$ |  | $V_{CC}$             | V             |
| $V_{IL}$ | Input LOW Voltage for Control Pin  | GND                  |  | $V_{CC} \times 0.35$ | V             |
| $I_{IH}$ | Input HIGH Current                 | -150                 |  | 150                  | $\mu\text{A}$ |
| $I_{IL}$ | Input LOW Current                  | -150                 |  | 150                  | $\mu\text{A}$ |

## TERMINATION RESISTORS

|            |                                                                        |    |    |    |          |
|------------|------------------------------------------------------------------------|----|----|----|----------|
| $R_{TIN}$  | Internal Input Termination Resistor (Measured from $I_N$ to $V_{Tx}$ ) | 45 | 50 | 55 | $\Omega$ |
| $R_{TOUT}$ | Internal Output Termination Resistor                                   | 45 | 50 | 55 | $\Omega$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

- Input and Output parameters vary 1:1 with  $V_{CC}$ .
- CML outputs loaded with 50  $\Omega$  to  $V_{CC}$  for proper operation.
- $V_{th}$  is applied to the complementary input when operating in single-ended mode.
- $V_{th}$ ,  $V_{IH}$ ,  $V_{IL}$ , and  $V_{ISE}$  parameters must be complied with simultaneously.
- $V_{IHD}$ ,  $V_{ILD}$ ,  $V_{ID}$  and  $V_{CMR}$  parameters must be complied with simultaneously.
- $V_{CMR}$  min varies 1:1 with GND,  $V_{CMR}$  max varies 1:1 with  $V_{CC}$ . The  $V_{CMR}$  range is referenced to the most positive side of the differential input signal.


# NB6L572M

**Table 6. AC CHARACTERISTICS**  $V_{CC} = 2.375\text{ V to }3.6\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C to }+85^\circ\text{C}$  (Note 11)

| Symbol                   | Characteristic                                                                                                                                           | Min                                                                       | Typ                                          | Max             | Unit                 |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------|-----------------|----------------------|
| $f_{MAX}$                | Maximum Input Clock Frequency $V_{OUT} \geq 250\text{ mV}$                                                                                               | 5                                                                         | 6                                            |                 | GHz                  |
| $f_{DATAMAX}$            | Maximum Operating Data Rate NRZ, (PRBS23)                                                                                                                | 6.5                                                                       | 8                                            |                 | Gbps                 |
| $f_{SEL}$                | Maximum Toggle Frequency, SELx                                                                                                                           | 20                                                                        | 40                                           |                 | MHz                  |
| $V_{OUTPP}$              | Output Voltage Amplitude (@ $V_{INPPmin}$ ) $f_{in} \leq 5\text{ GHz}$<br>(Note 12) (Figure 10)                                                          | 250                                                                       | 400                                          |                 | mV                   |
| $t_{PLH}$ ,<br>$t_{PHL}$ | Propagation Delay to Differential Outputs<br>Measured at Differential Crosspoint                                                                         | @ 1 GHz $INx/\overline{INx}$ to $Qx/\overline{Qx}$<br>@ 50 MHz SELx to Qx |                                              | 125<br>200<br>4 | ps<br>ns             |
| $t_{PD}$<br>Tempco       | Differential Propagation Delay Temperature Coefficient                                                                                                   |                                                                           | 100                                          |                 | $\Delta fs/^\circ C$ |
| tskew                    | Output – Output skew (within device) (Note 13)<br>Device – Device skew ( $tpd_{max} - tpd_{min}$ )                                                       |                                                                           | 0<br>5                                       | 15<br>25        | ps                   |
| $t_{DC}$                 | Output Clock Duty Cycle (Reference Duty Cycle = 50%) $f_{in} = 1\text{ GHz}$                                                                             | 45                                                                        | 50                                           | 55              | %                    |
| $\Phi_N$                 | Phase Noise, $f_{in} = 1\text{ GHz}$<br>10 kHz<br>100 kHz<br>1 MHz<br>10 MHz<br>20 MHz<br>40 MHz                                                         |                                                                           | -134<br>-136<br>-149<br>-150<br>-150<br>-150 |                 | dBc                  |
| $t_{J\Phi N}$            | Integrated Phase Jitter (Figure x) $f_{in} = 1\text{ GHz}$ , 12 kHz – 20 MHz Offset (RMS)                                                                |                                                                           | 35                                           |                 | fs                   |
| $t_{JITTER}$             | Random Clock Jitter, RJ(RMS) (Note 14) $f_{in} \leq 5\text{ GHz}$<br>Deterministic Jitter, DJ (Note 15) ( $FR4 \leq 12'$ ) $f_{in} \leq 6.5\text{ Gbps}$ |                                                                           | 0.2<br>1                                     | 0.8<br>5        | ps RMS<br>ps pk-pk   |
|                          | Crosstalk Induced Jitter (Adjacent Channel) (Note 16)                                                                                                    |                                                                           | 0.35                                         | 0.7             | ps RMS               |
| $V_{INPP}$               | Input Voltage Swing (Differential Configuration) (Note 17)                                                                                               | 100                                                                       |                                              | 1200            | mV                   |
| $t_r, t_f$               | Output Rise/Fall Times @ 1 GHz; (20% – 80%), $V_{IN} = 400\text{ mV } Qx, \overline{Qx}$                                                                 | 20                                                                        | 35                                           | 50              | ps                   |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

11. Measured using a 100 mVpk-pk source, 50% duty cycle clock source. All output loading with external 50  $\Omega$  to  $V_{CC}$ . Input edge rates 40 ps (20% – 80%).
12. Output voltage swing is a single-ended measurement operating in differential mode.
13. Skew is measured between outputs under identical transitions and conditions. Duty cycle skew is defined only for differential operation when the delays are measured from cross-point of the inputs to the cross-point of the outputs.
14. Additive RMS jitter with 50% duty cycle clock signal.
15. Additive Peak-to-Peak data dependent jitter with input NRZ data at PRBS23.
16. Crosstalk is measured at the output while applying two similar clock frequencies that are asynchronous with respect to each other at the inputs.
17. Input voltage swing is a single-ended measurement operating in differential mode.

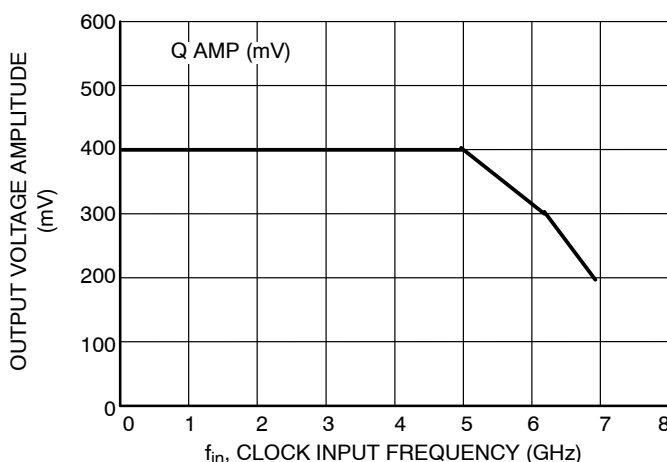

**Figure 3. Clock Output Voltage Amplitude ( $V_{OUTPP}$ ) vs. Input Frequency ( $f_{in}$ ) at Ambient Temperature (Typical)**

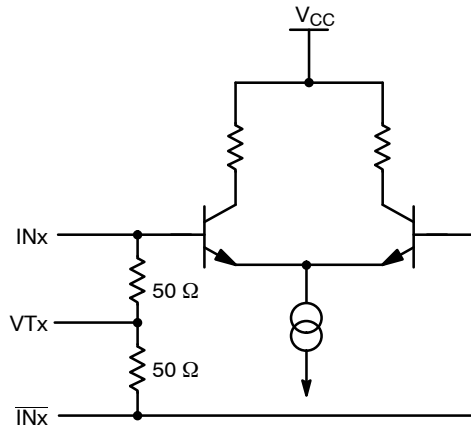


Figure 4. Input Structure

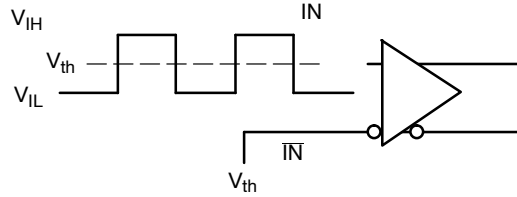


Figure 5. Differential Input Driven Single-Ended

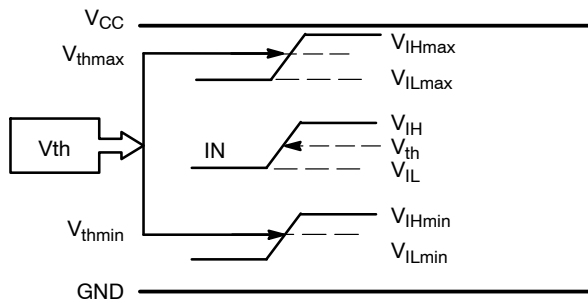


Figure 6.  $V_{th}$  Diagram




Figure 7. Differential Inputs Driven Differentially

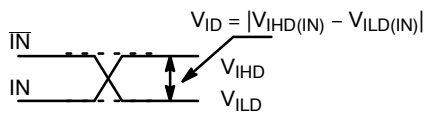


Figure 8. Differential Inputs Driven Differentially

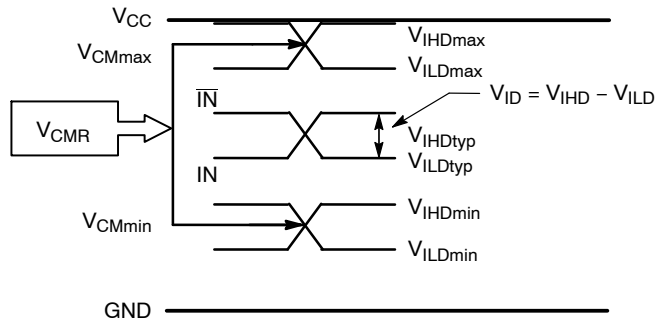


Figure 9.  $V_{CMR}$  Diagram

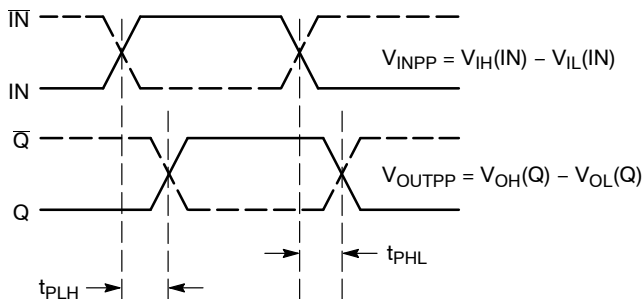


Figure 10. AC Reference Measurement

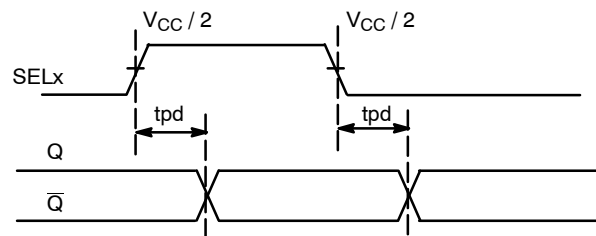


Figure 11. SELx to Qx Timing Diagram

# NB6L572M

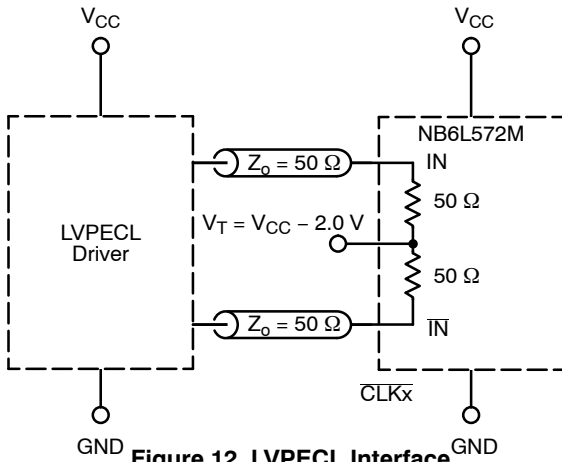


Figure 12. LVPECL Interface

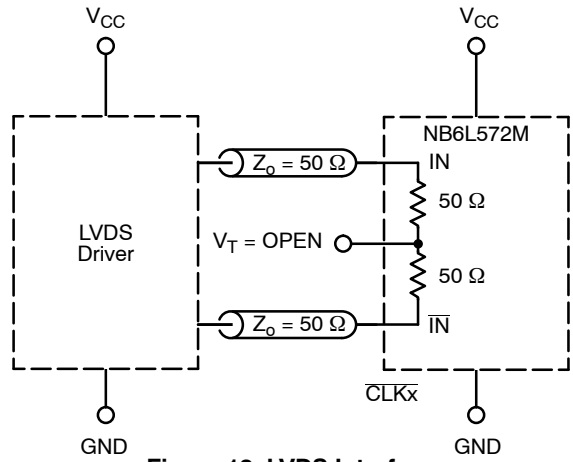


Figure 13. LVDS Interface

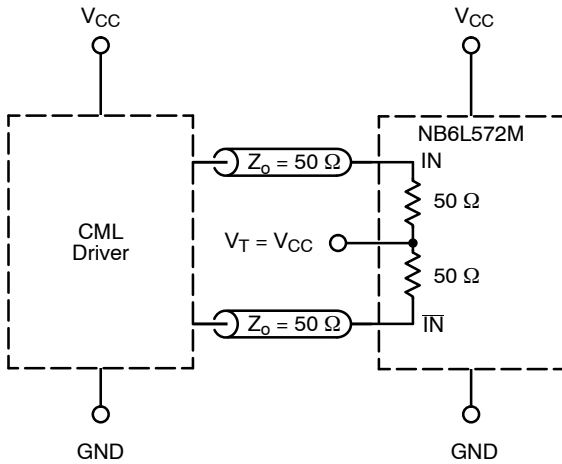


Figure 14. Standard 50 Ω Load CML Interface

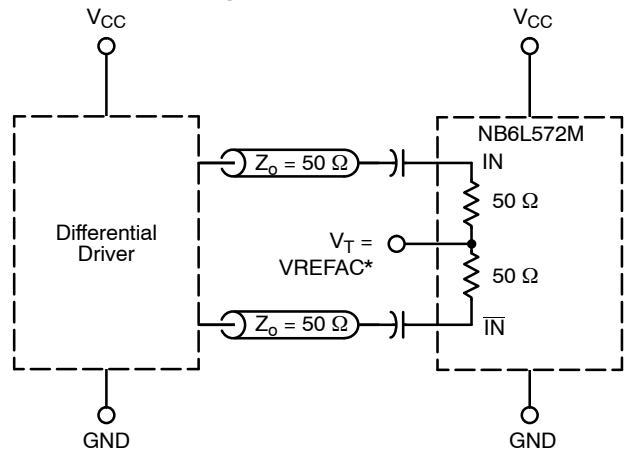


Figure 15. Capacitor-Coupled Differential Interface ( $V_T$  Connected to External  $V_{REFAC}$ )

\* $V_{REFAC}$  bypassed to ground with a 0.01  $\mu F$  capacitor.

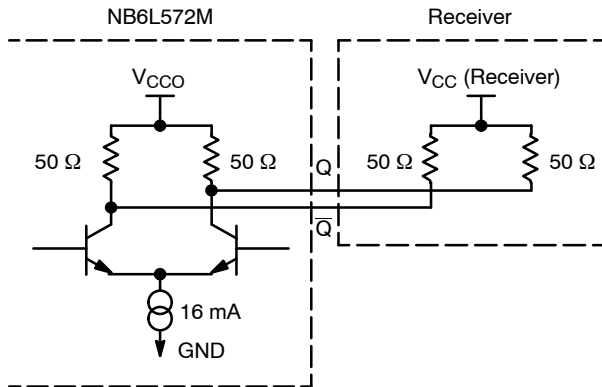


Figure 16. Typical CML Output Structure and Termination ( $V_{CC} = 2.5 V$  or  $3.3 V$ )

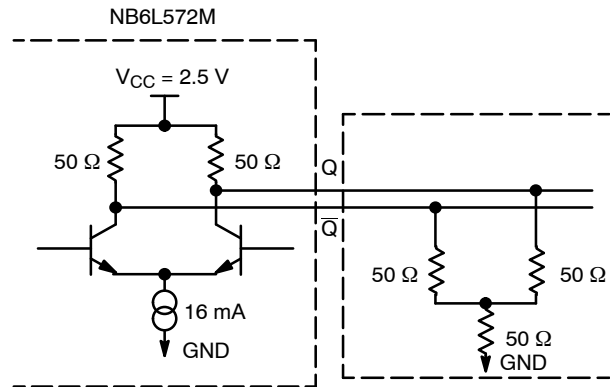


Figure 17. Alternative Output Termination ( $V_{CC} = 2.5 V$ , Only)

## DEVICE ORDERING INFORMATION

| Device        | Package             | Shipping <sup>†</sup> |
|---------------|---------------------|-----------------------|
| NB6L572MMNG   | QFN-32<br>(Pb-Free) | 74 Units / Rail       |
| NB6L572MMNR4G | QFN-32<br>(Pb-Free) | 1000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


ECLinPS MAX is a trademark of Semiconductor Component Industries, LLC (SCILLC).

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS

ON Semiconductor®




ON




1 32  
SCALE 2:1

QFN32 5x5, 0.5P  
CASE 488AM  
ISSUE A


DATE 23 OCT 2013

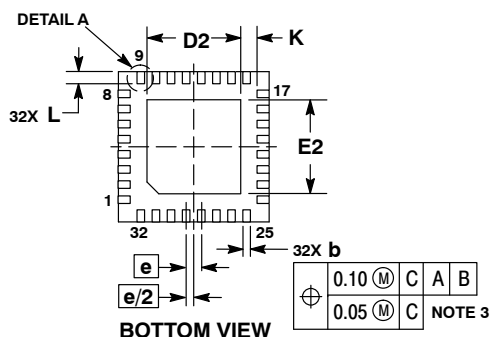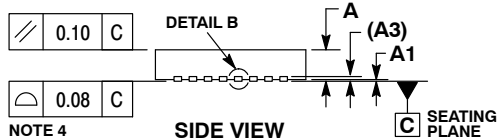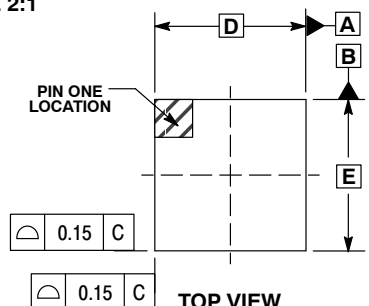


### RECOMMENDED SOLDERING FOOTPRINT\*

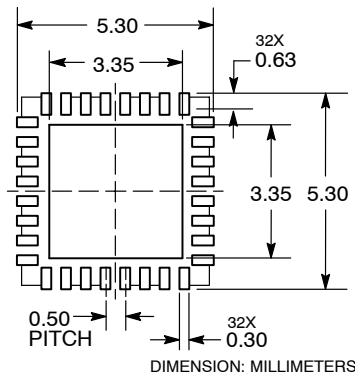

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



DETAIL A  
ALTERNATE TERMINAL CONSTRUCTIONS




DETAIL B  
ALTERNATE CONSTRUCTION

### NOTES:

1. DIMENSIONS AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30MM FROM THE TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| MILLIMETERS |          |      |
|-------------|----------|------|
| DIM         | MIN      | MAX  |
| A           | 0.80     | 1.00 |
| A1          |          | 0.05 |
| A3          | 0.20 REF |      |
| b           | 0.18     | 0.30 |
| D           | 5.00 BSC |      |
| D2          | 2.95     | 3.25 |
| E           | 5.00 BSC |      |
| E2          | 2.95     | 3.25 |
| e           | 0.50 BSC |      |
| K           | 0.20     |      |
| L           | 0.30     | 0.50 |
| L1          |          | 0.15 |

### GENERIC MARKING DIAGRAM\*



XXXXX = Specific Device Code  
A = Assembly Location  
WL = Wafer Lot  
YY = Year  
WW = Work Week  
■ = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking.  
Pb-Free indicator, "G" or microdot "■", may or may not be present.

|                  |                |                                                                                                                                                                                     |
|------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON20032D    | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | QFN32 5x5 0.5P | PAGE 1 OF 1                                                                                                                                                                         |

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

#### North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

#### Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

