

1405239

https://www.phoenixcontact.com/us/products/1405239

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Universal, 4-position, Pin, straight, M12-Standard, coding: A, on free cable end, Rear mounting, Pg9, Individual wires, cable length: 0.5 m, 0.34 mm², TPE litz wire, potted

Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- Standard pin assignments and codings for signal transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

| Item number | 1405239 |
|--------------------------------------|---------------------|
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB24 |
| Product key | ABQCWE |
| Catalog page | Page 270 (C-2-2013) |
| GTIN | 4046356746755 |
| Weight per piece (including packing) | 34.3 g |
| Weight per piece (excluding packing) | 34.3 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |



1405239

https://www.phoenixcontact.com/us/products/1405239

Technical data

Notes

| Notes on operation | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
|--------------------|--|
| Order information: | Lock nut is included in the scope of delivery |
| General | Contact connection method: Crimp connection |

Safety note

| Sa | tety | no | te |
|----|------|----|----|
| | | | |

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
 The products must be regularly inspected for damage.
 Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- · Only use tools recommended by Phoenix Contact
- Use a protective cap to protect connectors that are not in use.



1405239

https://www.phoenixcontact.com/us/products/1405239

| | The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products |
|--|--|
| | • Ensure that the protective or functional ground has been properly connected. |
| | VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector |
| | • The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12). |
| Mounting | |
| Mounting type | Rear mounting Pg9 With locking nut |
| Assembly note | With locking nut |
| Product properties | |
| | O're leaves when (In New York) |
| Product type | Circular connectors (device side) |
| Application | Signal |
| Sensor type | Universal |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | no . |
| Coding | A |
| Thread type | M12 |
| Insulation characteristics | |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Material specifications | |
| Material Molding compound | PUR (potted) |
| Flammability rating according to UL 94 | V0 |
| Seal material | FKM |
| Contact material | CuZn |
| Contact surface material | Au |
| Contact carrier material | PA 6.6 |
| Material for screw connection | Stainless steel |
| Conductor material | Tin-plated Cu litz wires |
| Electrical properties | |
| Rated surge voltage | 2.5 kV |
| Contact resistance | ≤ 3 mΩ |
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage U _N | 250 V (AC) |
| | 250 V (DC) |



1405239

https://www.phoenixcontact.com/us/products/1405239

| Nominal current I _N | 4 A |
|--------------------------------|-----------|
| Test voltage | 2.5 kV |
| | 2000 V AC |
| Max. conductor resistance | 57.6 mΩ/m |

Connection data

Conductor connection

| Connection method | Individual wires |
|-------------------------|-------------------------------|
| Contact connection type | Pin |
| Conductor cross section | 0.34 mm² |
| Tightening torque | 2 Nm 3 Nm (Installation-side) |

Mechanical properties

Mechanical data

| Insertion/withdrawal cycles | > 100 |
|--|-------|
| meet de la valle de la communication de la com | 100 |

Connector

Connection 1

| Head design | Pin |
|-------------------|----------|
| Head cable outlet | straight |
| Head thread type | M12 |
| Head locking type | Standard |
| Coding | A |

Connection 2

Cable/line

| Cable length | 0.5 m |
|---------------------------------|---------------------------|
| Cable type | TPE litz wire |
| Signal type/category | Universal |
| Wire diameter incl. insulation | 1.2 mm ±0.07 mm |
| Single wire, color | black, brown, blue, white |
| Cable cross section | 0.34 mm² |
| Conductor material | Tin-plated Cu litz wires |
| Conductor structure signal line | 7x 0.25 mm |
| AWG signal line | 22 |
| Material wire insulation | TPE |
| Thickness, insulation | 0.21 mm (Core insulation) |
| Nominal voltage, cable | 300 V |
| Test voltage, cable | 2000 V AC |
| Cable resistance | ≤ 57.6 mΩ/m |



1405239

https://www.phoenixcontact.com/us/products/1405239

| Cable insulation resistance | ≥ 20 MΩ*km |
|---------------------------------|---|
| Ambient temperature (operation) | -40 °C 85 °C (cable, fixed installation) |
| | -25 °C 85 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| Degree of protection | IP65/IP67/IP69/IP69K |
|---------------------------------|---|
| | IP65/IP67/IP69K |
| Ambient temperature (operation) | -25 °C 85 °C (Plug / socket) |
| | -40 °C 85 °C (without mechanical actuation) |
| | -25 °C 85 °C (Cable, flexible installation) |
| | -40 °C 85 °C (cable, fixed installation) |

Standards and regulations

| Standard designation | M12 circular connector |
|--------------------------|------------------------------|
| Standards/specifications | according to IEC 61076-2-101 |




1405239

https://www.phoenixcontact.com/us/products/1405239

Drawings

Schematic diagram

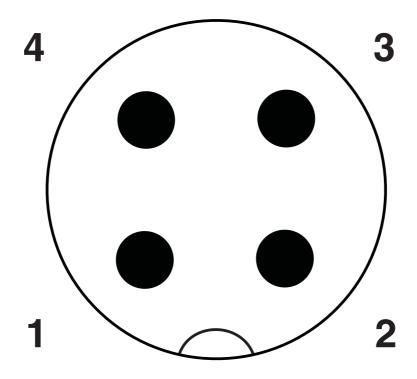


Pin assignment M12 plug, 4-pos., A-coded, view plug side




1405239

https://www.phoenixcontact.com/us/products/1405239

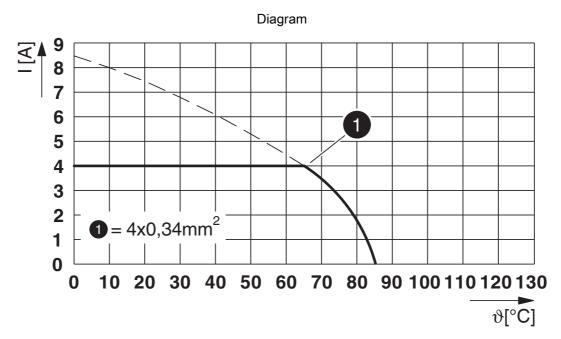

I = current strength, T = ambient temperature

Circuit diagram

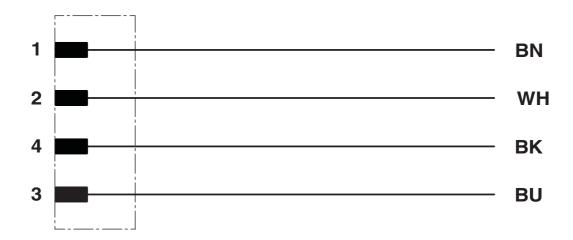

Contact assignment of the M12 connector



1405239

https://www.phoenixcontact.com/us/products/1405239

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1405239

| .71 | cUL Recognized Approval ID: E118976-2010 | 00522 | | | |
|-----|---|--------------------------------|--------------------------------|-------------------|-------------------------------|
| | | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| | | 250 V | 4 A | 22 | - |

| 71 | UL Recognized Approval ID: E118976-20100522 | | | | |
|----|---|--------------------------------|--------------------------------|-------------------|-------------------------------|
| | | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| | | 250 V | 4 A | 22 | - |

| c 911 us | cULus Recognized Approval ID: E221474-20140616 | | | | |
|-----------------|--|--------------------------------|--------------------------------|-------------------|-------------------------------|
| | | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| | | 250 V | 4 A | 22 - 20 | - |



1405239

https://www.phoenixcontact.com/us/products/1405239

Classifications

UNSPSC 21.0

| | \sim | 1 / 0 | C |
|---|--------|-------------------|---|
| _ | | \perp A \circ | |

ECLASS-13.0 27440103

ETIM

ETIM 9.0 EC003570

UNSPSC

39121400



1405239

https://www.phoenixcontact.com/us/products/1405239

Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--|
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com