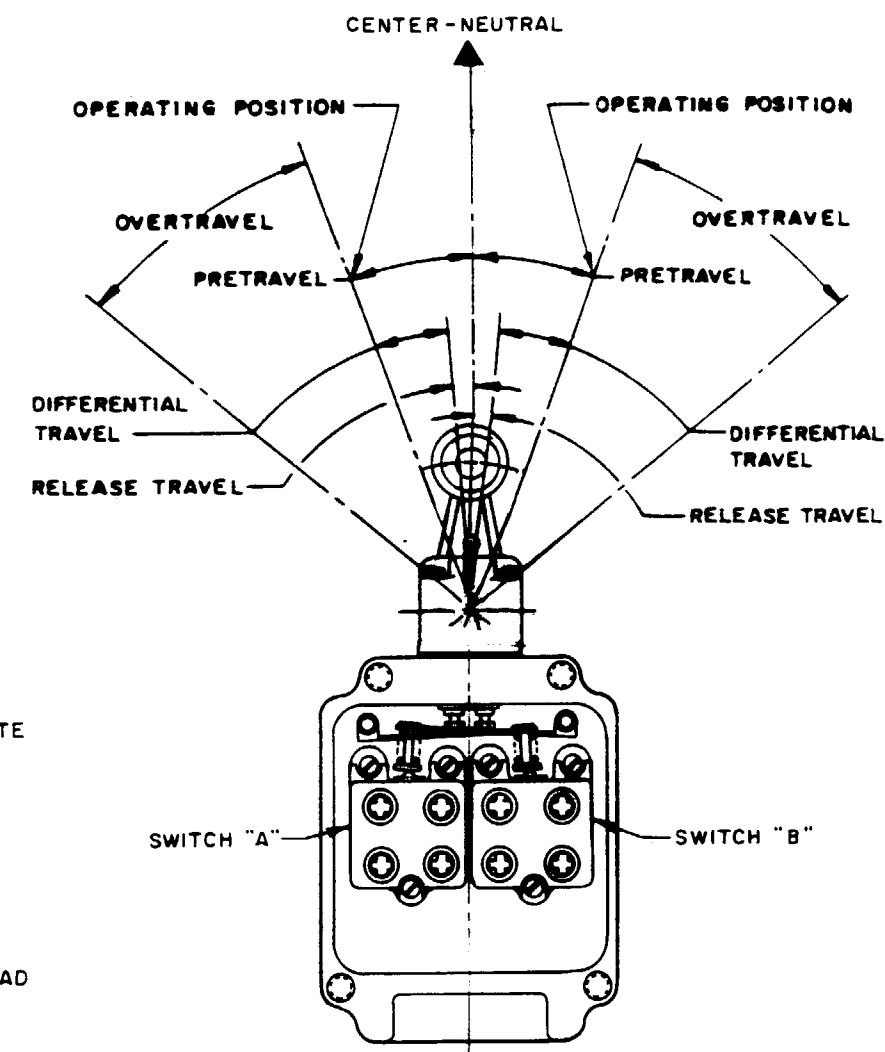


NOTES

- ① ROLLER LEVER MAY BE LOCKED IN ANY POSITION THRU 360°. WHEN HEAD MECHANISM IS POSITIONED IN OTHER THREE QUADRANTS, LEVER LOCATION IS RESTRICTED TO APPROX 180°
- 2- ROLLER LEVER WILL OPERATE BOTH SWITCHES IN EITHER DIRECTION FROM NEUTRAL
 - 3- LEVER FURNISHED UNASSEMBLED IN UNIT PACKING BOX
 - 4- BASIC SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING TORQUE — — — — 75 IN-LB MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
FULL OVERTRAVEL TORQUE — — 9.0 IN-LB MAX		UNLESS OTHERWISE NOTED
RELEASE TORQUE — — — — 75 IN-LB MIN	10A-120, 240, OR 480 VAC; 1/3 HP - 120 VAC	DIMENSIONS ARE IN INCHES
PRETRAVEL — — — — — 15° MAX	3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC	TOLERANCES ARE:
DIFFERENTIAL TRAVEL — — — — 10° MAX	.1A - 550 VDC	ONE PLACE (.0) ±.030
OVERTRAVEL — — — — — 30° MIN	PILOT DUTY: 600 VAC MAX	TWO PLACE (.00) ±.015
RELEASE TRAVEL — — — — — 5° MIN		THREE PLACE (.000) ±.005
SWITCH-BASIC REPLACEMENT — — — 2MN6 (2)		ANGLES ±
		WEIGHT