ON Semiconductor

Is Now



To learn more about onsemi[™], please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,


Quad TTL to MECL Translator

The MC10124 is a quad translator for interfacing data and control signals between a saturated logic section and the MECL section of digital systems. The MC10124 has TTL compatible inputs, and MECL complementary open–emitter outputs that allow use as an inverting/ non–inverting translator or as a differential line driver. When the common strobe input is at the low logic level, it forces all true outputs to a MECL low logic state and all inverting outputs to a MECL high logic state.


Power supply requirements are ground, +5.0 Volts, and -5.2 Volts. Propagation delay of the MC10124 is typically 3.5 ns. The dc levels are standard or Schottky TTL in, MECL 10,000 out.

An advantage of this device is that TTL level information can be transmitted differentially, via balanced twisted pair lines, to the MECL equipment, where the signal can be received by the MC10115 or MC10116 differential line receivers. The MC10124 is useful in computers, instrumentation, peripheral controllers, test equipment, and digital communications systems.

- $P_D = 380 \text{ mW typ/pkg (No Load)}$
- $t_{pd} = 3.5 \text{ ns typ } (+1.5 \text{ Vdc in to } 50\% \text{ out})$
- t_r , $t_f = 2.5$ ns typ (20%–80%)



DIP PIN ASSIGNMENT



Pin assignment is for Dual–in–Line Package.
For PLCC pin assignment, see the Pin Conversion Tables on page 18 of the ON Semiconductor MECL Data Book (DL122/D).



ON Semiconductor

http://onsemi.com

MARKING DIAGRAMS




CDIP-16 L SUFFIX CASE 620





PDIP-16 P SUFFIX CASE 648





PLCC-20 FN SUFFIX CASE 775



A = Assembly Location

WL = Wafer Lot YY = Year

WW = Work Week

ORDERING INFORMATION

Device	Package	Shipping
MC10124L	CDIP-16	25 Units / Rail
MC10124P	PDIP-16	25 Units / Rail
MC10124FN	PLCC-20	46 Units / Rail

ELECTRICAL CHARACTERISTICS

			Test Limits							
		Pin Under	-30	o∘C		+25°C		+85	5°C	
Characteristic	Symbol	Test	Min	Max	Min	Тур	Max	Min	Max	Unit
Negative Power Supply Drain Current	Ι _Ε	8		72			66		72	mAdc
Positive Power Supply	Іссн	9		16			16		18	mAdc
Drain Current	I _{CCL}	9		25			25		25	mAdc
Reverse Current	I _R	6 7		200 50			200 50		200 50	μAdc
Forward Current	I _F	6 7		-12.8 -3.2			-12.8 -3.2		-12.8 -3.2	mAdc
Input Breakdown Voltage	BV _{in}	6 7	5.5 5.5		5.5 5.5			5.5 5.5	C	Vdc
Clamp Input Voltage	V _I	6 7		-1.5 -1.5			-1.5 -1.5		-1.5 -1.5	Vdc
High Output Voltage	V _{OH}	1 3	-1.060 -1.060	-0.890 -0.890	-0.960 -0.960		-0.810 -0.810	-0.890 -0.890	-0.700 -0.700	Vdc
Low Output Voltage	V _{OL}	1 3	-1.890 -1.890	-1.675 -1.675	-1.850 -1.850		-1.650 -1.650	-1.825 -1.825	-1.615 -1.615	Vdc
High Threshold Voltage	V _{OHA}	1 3	-1.080 -1.080		-0.980 -0.980			-0.910 -0.910		Vdc
Low Threshold Voltage	V _{OLA}	1 3		-1.655 -1.655		0	-1.630 -1.630		-1.595 -1.595	Vdc
Switching Times (50 Ω Load)						,O				ns
Propagation Delay (+3.5Vdc to 50%) ¹	t ₆₊₁₊ t ₆₋₁₋ t ₇₊₁₊ t ₇₋₁₋ t ₇₊₃₋ t ₇₋₃₊	1 1 1 1 3 3	1.5 1.0 1.5 1.0 1.5	6.8 6.0 6.8 6.0 6.8 6.0	1.0 1.0 1.0 1.0 1.0	3.5 3.5 3.5 3.5 3.5 3.5	6.0 6.0 6.0 6.0 6.0	1.0 1.5 1.0 1.5 1.0	6.0 6.8 6.0 6.8 6.0 6.8	
Rise Time (20 to 80%)	t ₁₊	1	1.0	4.2	1.1	2.5	3.9	1.1	4.3	
Fall Time (20 to 80%)	t ₁₋	1 .	1.0	4.2	1.1	2.5	3.9	1.1	4.3	

See switching time test circuit. Propagation delay for this circuit is specified from +1.5Vdc in to the 50% point on the output waveform. The +3.5Vdc is shown here because all logic and supply levels are shifted 2 volts positive.

ELECTRICAL CHARACTERISTICS (continued)

			TEST VOLTAGE VALUES (Volts)					
	@ Test Te	mperature	V _{IH}	V _{ILmax}	V _{IHA} ,	V _{ILA} ,	V _F	
−30°C			+4.0	+0.40	+2.00	+1.10	+0.40	
		+25°C	+4.0	+0.40	+1.80	+1.10	+0.40	
		+85°C	+4.0	+0.40	+1.80	+0.90	+0.40	
		Pin	TEST VO	DLTAGE APF	PLIED TO PI	NS LISTED E	BELOW	
Characteristic	Symbol	Under Test	V _{IH}	V _{ILmax}	V _{IHA} ,	V _{ILA} ,	V _F	Gnd
Negative Power Supply Drain Current	ΙE	8						16
Positive Power Supply Drain	I _{CCH}	9	5,6,7,10,11					16
Current	I _{CCL}	9						5,6,7,10,11,16
Reverse Current	I _R	6 7					5,7,10,11 6	16 16
Forward Current	I _F	6 7	5,7,10,11 6				6 7	16 16
Input Breakdown Voltage	BV _{in}	6 7					O,	5,7,10,11,16 6,16
Clamp Input Voltage	VI	6 7						16 16
High Output Voltage	V _{OH}	1 3	6,7	6,7				16 16
Low Output Voltage	V _{OL}	1 3	6,7	6,7	,0			16 16
High Threshold Voltage	V _{OHA}	1 3	6 6		7	7		16 16
Low Threshold Voltage	V _{OLA}	1 3	6		7	7		16 16
Switching Times (50Ω Load)			+6.0 V	Pulse In	Pulse Out			+2.0 V
Propagation Delay (+3.5Vdc to 50%) ¹	t ₆₊₁₊	1	7 7	6 6	1 1			16 16
(+3.3 vac to 30%)	t ₆₋₁₋ t ₇₊₁₊	1	6	7	1			16
	t ₇₋₁₋	1	6	7	1			16
	t ₇₊₃₋ t ₇₋₃₊	3	6 6	7 7	3 3			16 16
Rise Time (20 to 80%)	t ₁₊	.Q	6	, 7	1			16
Fall Time (20 to 80%)	t ₁₌		6	, 7	1			16

^{1.} See switching time test circuit. Propagation delay for this circuit is specified from +1.5Vdc in to the 50% point on the output waveform. The +3.5Vdc is shown here because all logic and supply levels are shifted 2 volts positive.

OF VICE NO


ELECTRICAL CHARACTERISTICS (continued)

			TEST VOLTAGE VALUES (Volts)		(mA)			
	@ Test Te	mperature	V _R	V _{CC}	V _{EE}	lı	l _{in}	
		-30°C	+2.40	+5.00	-5.2	-10	+1.0	
		+25°C	+2.40	+5.00	-5.2	-10	+1.0	
		+85°C	+2.40	+5.00	-5.2	-10	+1.0	
		Pin	TEST V	OLTAGE AP	PLIED TO PI	NS LISTED I	BELOW	
Characteristic	Symbol	Under Test	V _R	V _{CC}	V _{EE}	l _l	l _{in}	Gnd
Negative Power Supply Drain Current	ΙE	8		9	8			16
Positive Power Supply Drain	I _{CCH}	9		9	8			16
Current	I _{CCL}	9		9	8			5,6,7,10,11,16
Reverse Current	I _R	6 7	6 7	9 9	8 8			16 16
Forward Current	l _F	6 7		9 9	8 8			16 16
Input Breakdown Voltage	BV _{in}	6 7		9 9	8 8		6 7	5,7,10,11,16 6,16
Clamp Input Voltage	VI	6 7		9 9	8 8	6 7		16 16
High Output Voltage	V _{OH}	1 3		9 9	8 8			16 16
Low Output Voltage	V _{OL}	1 3		9 9	8 8			16 16
High Threshold Voltage	V _{OHA}	1 3		9 9	8 8			16 16
Low Threshold Voltage	V _{OLA}	1 3		9	8 8			16 16
Switching Times (50 Ω Load)				+7.0 V	-3.2 V			+2.0 V
Propagation Delay (+3.5Vdc to 50%) ¹	t ₆₊₁₊ t ₆₋₁₋	1		9 9	8 8		,	16 16
(10.01.00.0070)	t ₇₊₁₊	1		9	8			16
	t ₇₋₁₋	1		9	8			16
	t ₇₊₃₋ t ₇₋₃₊	3		9 9	8 8			16 16
Rise Time (20 to 80%)	t ₁₊	4		9	8			16
Fall Time (20 to 80%)	t ₁₋	1		9	8			16

^{1.} See switching time test circuit. Propagation delay for this circuit is specified from +1.5Vdc in to the 50% point on the output waveform. The +3.5Vdc is shown here because all logic and supply levels are shifted 2 volts positive.

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50-ohm resistor to -2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

SWITCHING TIME TEST CIRCUIT

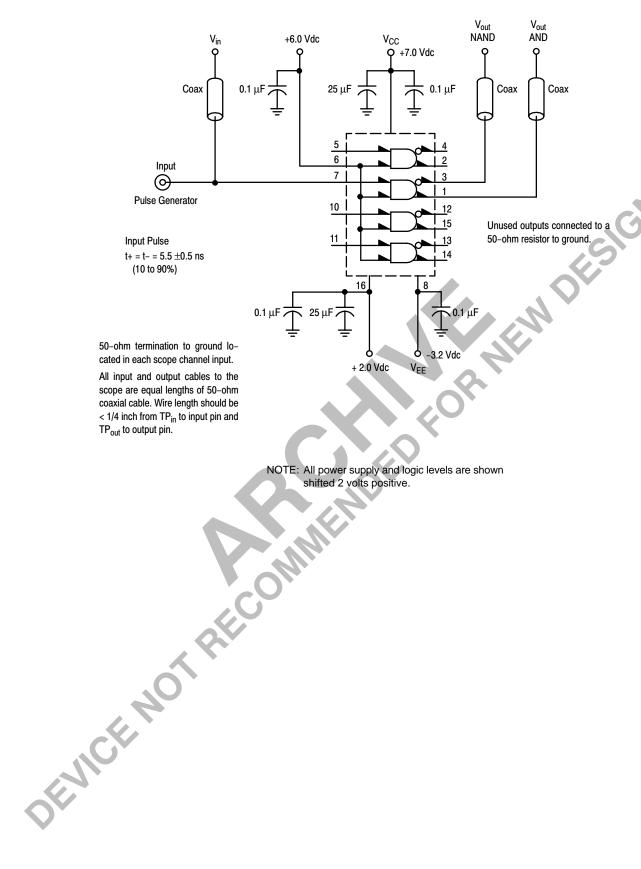


NOTE: All power supply and logic levels are shown shifted 2 volts positive.

PACKAGE DIMENSIONS

PLCC-20 **FN SUFFIX**

PLASTIC PLCC PACKAGE CASE 775-02 ISSUE C

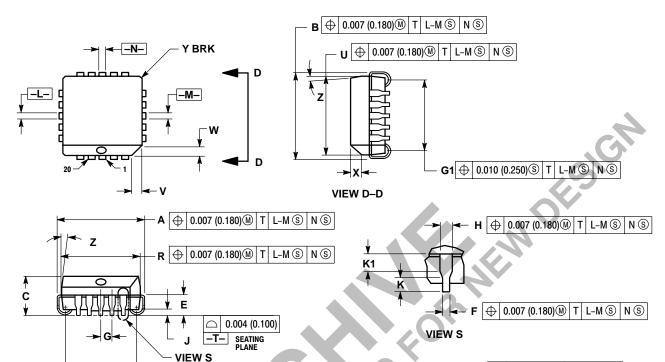

NOTES:

G1 ⊕ 0.010 (0.250)③ T L-M ⑤ N ⑤

OF NICE, NOT RECO

- OTES:

 1. DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.


 2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.

 3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.

 4. DIMENSIONING AND TOLERANCING PER ANSI Y14 5M 1982
- Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

	INC	HES	MILLIM	ETERS
DIM	MIN	MAX	MIN	MAX
Α	0.385	0.395	9.78	10.03
В	0.385	0.395	9.78	10.03
С	0.165	0.180	4.20	4.57
Ε	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050	BSC	1.27	BSC
Н	0.026	0.032	0.66	0.81
J	0.020		0.51	
K	0.025		0.64	
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
٧	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
Х	0.042	0.056	1.07	1.42
Υ		0.020		0.50
Z	2°	10°	2 °	10 °
G1	0.310	0.330	7.88	8.38
K1	0.040		1.02	

PACKAGE DIMENSIONS

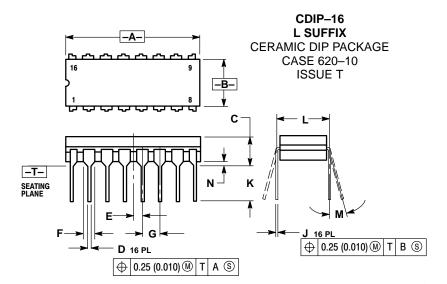

NOTES:


- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 CONTROLLING DIMENSION: INCH.
 DIMENSION LTO CENTER OF LEAD WHEN CONTROLLING DIMENSION LTO CENTER OF LEAD WHEN

- FORMED PARALLEL

 DIMENSION F MAY NARROW TO 0.76 (0.030)
 WHERE THE LEAD ENTERS THE CERAMIC
 BODY.

	INC	HES	MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.750	0.785	19.05	19.93
В	0.240	0.295	6.10	7.49
С		0.200		5.08
D	0.015	0.020	0.39	0.50
E	0.050	BSC	1.27 BSC	
F	0.055	0.065	1.40	1.65
G	0.100	BSC	2.54 BSC	
Н	0.008	0.015	0.21	0.38
K	0.125	0.170	3.18	4.31
L	0.300 BSC		7.62 BSC	
M	0 °	15°	0 0	15°
N	0.020	0.040	0.51	1.01



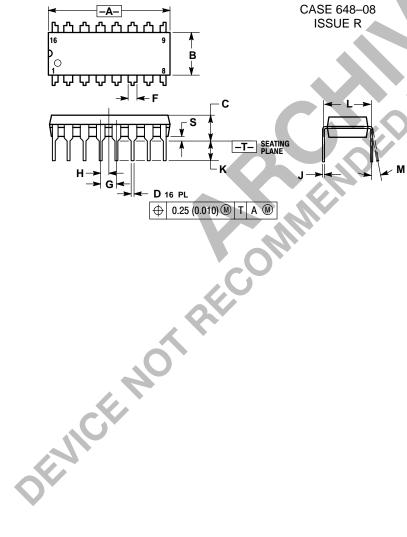

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
 4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
 5. ROUNDED CORNERS OPTIONAL

	INC	HES	MILLIN	IETERS	
DIM	MIN	MAX	MIN	MAX	
Α	0.740	0.770	18.80	19.55	
В	0.250	0.270	6.35	6.85	
С	0.145	0.175	3.69	4.44	
D	0.015	0.021	0.39	0.53	
F	0.040	0.70	1.02	1.77	
G	0.100	BSC	2.54	BSC	
Н	0.050	BSC	1.27 BSC		
J	0.008	0.015	0.21	0.38	
K	0.110	0.130	2.80	3.30	
L	0.295	0.305	7.50	7.74	
M	0°	10 °	0°	10 °	
S	0.020	0.040	0.51	1.01	



ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada **Fax:** 303–675–2176 or 800–344–3867 Toll Free USA/Canada

Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center 4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031

Phone: 81–3–5740–2700 Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local

Sales Representative.