

SMD Power Inductor


CDH2D09B



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 3.0 × 2.8 x1.0 mm Max.
- Product weight: 23mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Dimension - [mm]

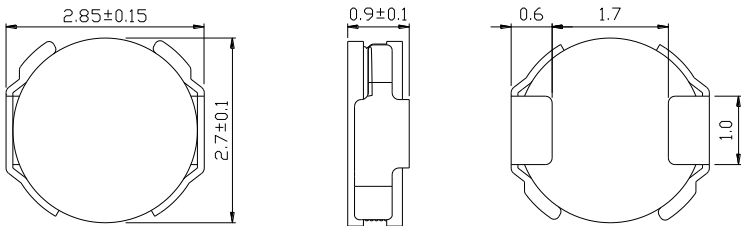


Environmental Data

- Operating temperature range:-40℃~+105℃ (including coil's self temperature rise)
- Storage temperature range:-40℃~+105℃
- Solder reflow temperature: 260 ℃ peak.

Packaging

- Carrier tape and reel packaging
- 7.0" diameter reel
- 1500pcs per reel

Land pattern and Schematics - [mm]

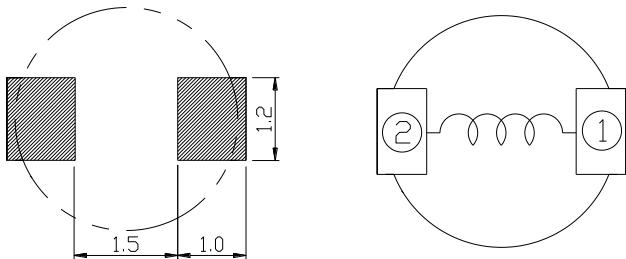

Applications

- Ideally used in Mobilephone,PDA,MP3,HDD, DSC/DVC, etc as DC-DC inverter inductors.

Electrical Characteristics

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (mΩ) [Max.] (Typ.) (at 20℃)	Saturation Current (A) ※2	Temperature Rise Current (A) ※3
CDH2D09BNP-2R4MC	E	2.4±20%	160(128)	1.00	1.18
CDH2D09BNP-3R3MC	F	3.3±20%	188(150)	0.85	1.06
CDH2D09BNP-4R7MC	G	4.7±20%	273(218)	0.70	0.85
CDH2D09BNP-6R4MC	J	6.4±20%	400(320)	0.60	0.64
CDH2D09BNP-100MC	L	10±20%	588(470)	0.48	0.47
CDH2D09BNP-150MC	M	15±20%	956(765)	0.38	0.39
CDH2D09BNP-220MC	P	22±20%	1313(1050)	0.31	0.34

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40℃(Ta=20℃).








SMD Power Inductor

CDH2D09B




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

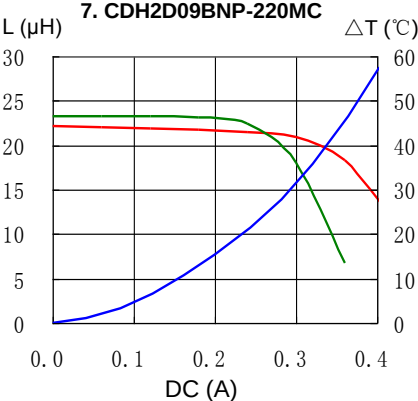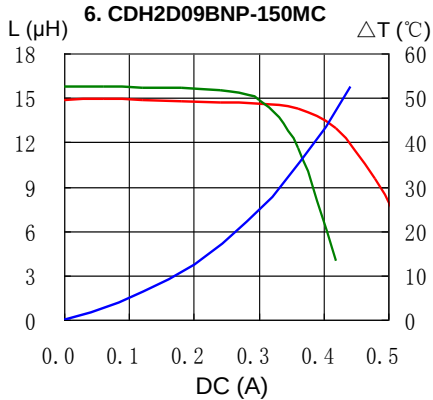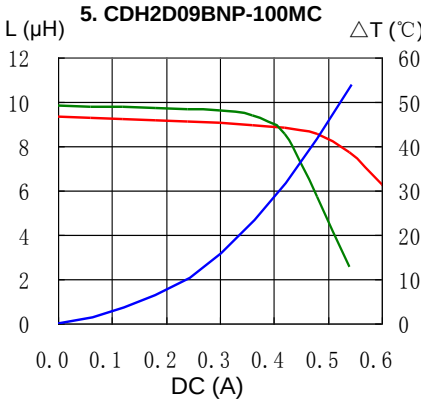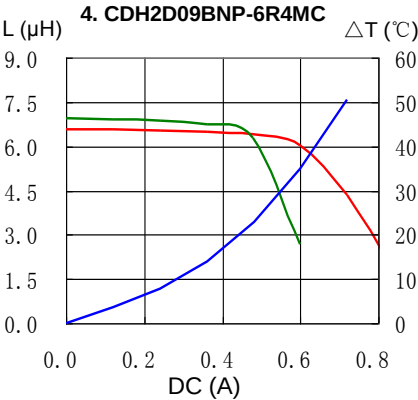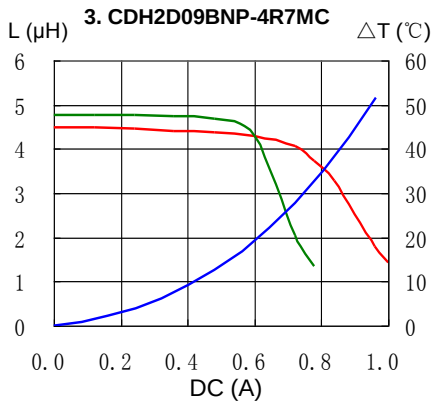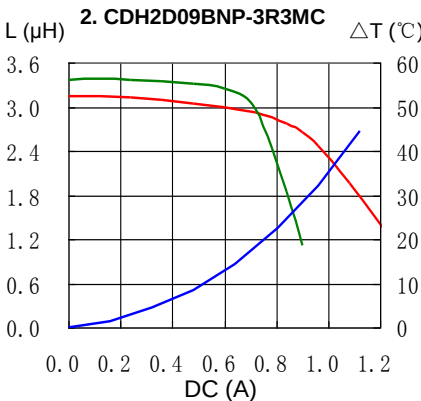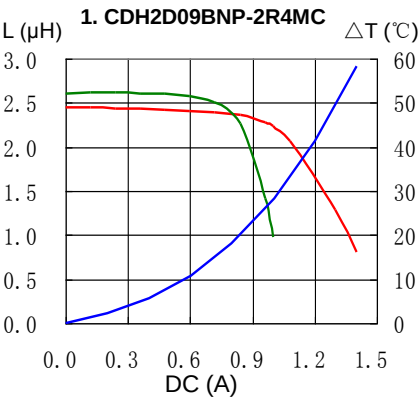


SMD Power Inductor CDH2D09B




Solder Reflow Condition

Heat Endurance

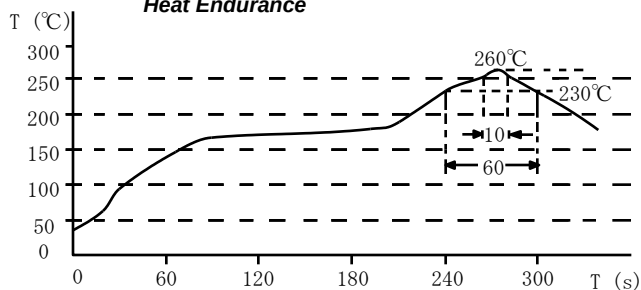

Temperature Chart

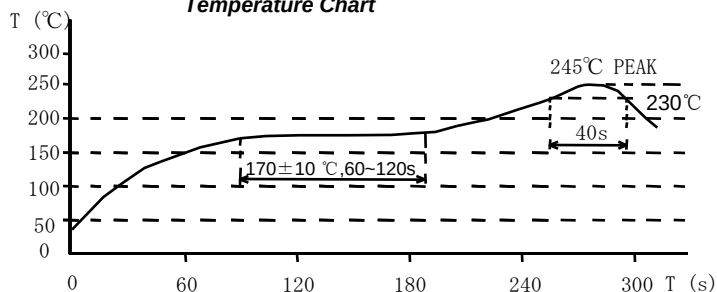

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com