

# 2N6071A/B Series

Preferred Device

## Sensitive Gate Triacs

### Silicon Bidirectional Thyristors

Designed primarily for full-wave AC control applications, such as light dimmers, motor controls, heating controls and power supplies; or wherever full-wave silicon gate controlled solid-state devices are needed. Triac type thyristors switch from a blocking to a conducting state for either polarity of applied anode voltage with positive or negative gate triggering.

#### Features

- Sensitive Gate Triggering Uniquely Compatible for Direct Coupling to TTL, HTL, CMOS and Operational Amplifier Integrated Circuit Logic Functions
- Gate Triggering: 4 Mode - 2N6071A, B; 2N6073A, B; 2N6075A, B
- Blocking Voltages to 600 V
- All Diffused and Glass Passivated Junctions for Greater Parameter Uniformity and Stability
- Small, Rugged, Thermopad Construction for Low Thermal Resistance, High Heat Dissipation and Durability
- Device Marking: Device Type, e.g., 2N6071A, Date Code





**Littelfuse®**

Expertise Applied | Answers Delivered

Littelfuse.com

### TRIACS 4.0 A RMS, 200 – 600 V




REAR VIEW  
SHOW TAB

TO-225  
CASE 077  
STYLE 5

#### MARKING DIAGRAM

1. Cathode
2. Anode
3. Gate



|    |                   |
|----|-------------------|
| x  | = 1, 3, 5         |
| y  | = A, B            |
| Y  | = Year            |
| WW | = Work Week       |
| G  | = Pb-Free Package |

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

**Preferred** devices are recommended choices for future use and best overall value.

## 2N6071A/B Series

### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

| Rating                                                                                                                                                   | Symbol                                 | Value             | Unit             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------|------------------|
| *Peak Repetitive Off-State Voltage (Note 1)<br>(T <sub>J</sub> = -40 to 110°C, Sine Wave, 50 to 60 Hz, Gate Open)<br>2N6071A,B<br>2N6073A,B<br>2N6075A,B | V <sub>DRM</sub> ,<br>V <sub>RRM</sub> | 200<br>400<br>600 | V                |
| *On-State RMS Current (T <sub>C</sub> = 85°C) Full Cycle Sine Wave 50 to 60 Hz                                                                           | I <sub>T(RMS)</sub>                    | 4.0               | A                |
| *Peak Non-repetitive Surge Current (One Full cycle, 60 Hz, T <sub>J</sub> = +110°C)                                                                      | I <sub>TSM</sub>                       | 30                | A                |
| Circuit Fusing Considerations (t = 8.3 ms)                                                                                                               | I <sup>2</sup> t                       | 3.7               | A <sup>2</sup> s |
| *Peak Gate Power (Pulse Width ≤ 1.0 μs, T <sub>C</sub> = 85°C)                                                                                           | P <sub>GM</sub>                        | 10                | W                |
| *Average Gate Power (t = 8.3 ms, T <sub>C</sub> = 85°C)                                                                                                  | P <sub>G(AV)</sub>                     | 0.5               | W                |
| *Peak Gate Voltage (Pulse Width ≤ 1.0 μs, T <sub>C</sub> = 85°C)                                                                                         | V <sub>GM</sub>                        | 5.0               | V                |
| *Operating Junction Temperature Range                                                                                                                    | T <sub>J</sub>                         | -40 to +110       | °C               |
| *Storage Temperature Range                                                                                                                               | T <sub>stg</sub>                       | -40 to +150       | °C               |
| Mounting Torque (6-32 Screw) (Note 2)                                                                                                                    | -                                      | 8.0               | in. lb.          |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. V<sub>DRM</sub> and V<sub>RRM</sub> for all types can be applied on a continuous basis. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.
2. Torque rating applies with use of a compression washer. Mounting torque in excess of 6 in. lb. does not appreciably lower case-to-sink thermal resistance. Main terminal 2 and heatsink contact pad are common.

### THERMAL CHARACTERISTICS

| Characteristic                                                                | Symbol           | Max | Unit |
|-------------------------------------------------------------------------------|------------------|-----|------|
| *Thermal Resistance, Junction-to-Case                                         | R <sub>θJC</sub> | 3.5 | °C/W |
| Thermal Resistance, Junction-to-Ambient                                       | R <sub>θJA</sub> | 75  | °C/W |
| Maximum Lead Temperature for Soldering Purposes 1/8" from Case for 10 Seconds | T <sub>L</sub>   | 260 | °C   |

\*Indicates JEDEC Registered Data.

## 2N6071A/B Series

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

#### OFF CHARACTERISTICS

|                                                                               |                          |   |   |    |               |
|-------------------------------------------------------------------------------|--------------------------|---|---|----|---------------|
| *Peak Repetitive Blocking Current<br>( $V_D = V_{DRM} = V_{RRM}$ ; Gate Open) | $I_{DRM}$ ,<br>$I_{RRM}$ | - | - | 10 | $\mu\text{A}$ |
| $T_J = 25^\circ\text{C}$<br>$T_J = 110^\circ\text{C}$                         |                          | - | - | 2  | $\text{mA}$   |

#### ON CHARACTERISTICS

|                                                                                                                                                                    |          |     |     |          |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----|-----|----------|---------------|
| *Peak On-State Voltage (Note 3) ( $I_{TM} = \pm 6.0\text{ A Peak}$ )                                                                                               | $V_{TM}$ | -   | -   | 2        | V             |
| *Gate Trigger Voltage (Continuous DC), All Quadrants<br>(Main Terminal Voltage = 12 Vdc, $R_L = 100\ \Omega$ , $T_J = -40^\circ\text{C}$ )                         | $V_{GT}$ | -   | 1.4 | 2.5      | V             |
| Gate Non- Trigger Voltage, All Quadrants<br>(Main Terminal Voltage = 12 Vdc, $R_L = 100\ \Omega$ , $T_J = 110^\circ\text{C}$ )                                     | $V_{GD}$ | 0.2 | -   | -        | V             |
| *Holding Current<br>(Main Terminal Voltage = 12 Vdc, Gate Open, Initiating Current = $\pm 1\text{ Adc}$ )<br>$T_J = -40^\circ\text{C}$<br>$T_J = 25^\circ\text{C}$ | $I_H$    | -   | -   | 30<br>15 | $\text{mA}$   |
| Turn-On Time ( $I_{TM} = 14\text{ Adc}$ , $I_{GT} = 100\text{ mAdc}$ )                                                                                             | $t_{gt}$ | -   | 1.5 | -        | $\mu\text{s}$ |

#### QUADRANT (Maximum Value)

|                                                                                                | Type    | $I_{GT} @ T_J$ | I<br>mA | II<br>mA | III<br>mA | IV<br>mA |
|------------------------------------------------------------------------------------------------|---------|----------------|---------|----------|-----------|----------|
| Gate Trigger Current (Continuous DC)<br>(Main Terminal Voltage = 12 Vdc, $R_L = 100\ \Omega$ ) | 2N6071A | +25°C          | 5       | 5        | 5         | 10       |
|                                                                                                | 2N6073A | -40 °C         | 20      | 20       | 20        | 30       |
|                                                                                                | 2N6075A |                |         |          |           |          |
|                                                                                                | 2N6071B | +25°C          | 3       | 3        | 3         | 5        |
|                                                                                                | 2N6073B | -40 °C         | 15      | 15       | 15        | 20       |
|                                                                                                | 2N6075B |                |         |          |           |          |


#### DYNAMIC CHARACTERISTICS

|                                                                                                                                                                                              |            |   |   |   |                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---|---|---|------------------------|
| Critical Rate of Rise of Commutation Voltage<br>@ $V_{DRM}$ , $T_J = 85^\circ\text{C}$ , Gate Open, $I_{TM} = 5.7\text{ A}$ , Exponential Waveform,<br>Commutating $di/dt = 2.0\text{ A/ms}$ | $dv/dt(c)$ | - | 5 | - | $\text{V}/\mu\text{s}$ |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---|---|---|------------------------|

3. Pulse Test: Pulse Width  $\leq 2.0\text{ ms}$ , Duty Cycle  $\leq 2\%$ .

\*Indicates JEDEC Registered Data.

### SAMPLE APPLICATION: TTL-SENSITIVE GATE 4 AMPERE TRIAC TRIGGERS IN MODES II AND III

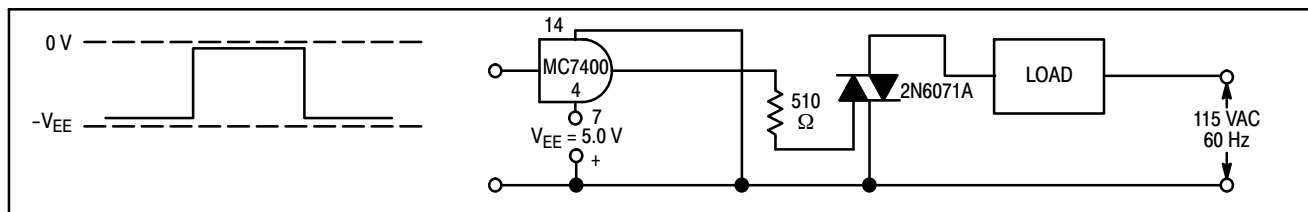


Trigger devices are recommended for gating on Triacs. They provide:

1. Consistent predictable turn-on points.
2. Simplified circuitry.
3. Fast turn-on time for cooler, more efficient and reliable operation.


## 2N6071A/B Series

### Voltage Current Characteristic of Triacs (Bidirectional Device)

| Symbol    | Parameter                                 |
|-----------|-------------------------------------------|
| $V_{DRM}$ | Peak Repetitive Forward Off State Voltage |
| $I_{DRM}$ | Peak Forward Blocking Current             |
| $V_{RRM}$ | Peak Repetitive Reverse Off State Voltage |
| $I_{RRM}$ | Peak Reverse Blocking Current             |
| $V_{TM}$  | Maximum On State Voltage                  |
| $I_H$     | Holding Current                           |

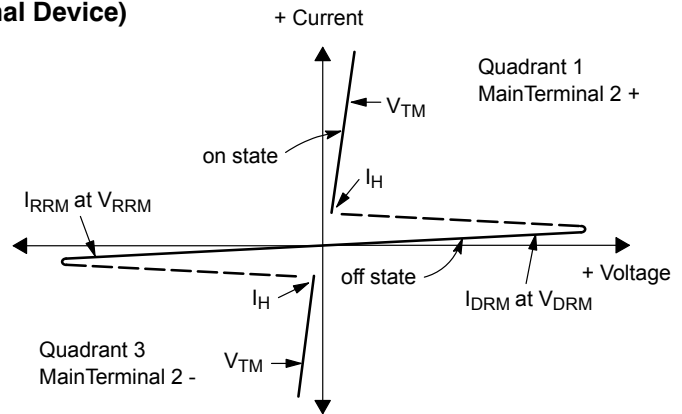

### Quadrant Definitions for a Triac

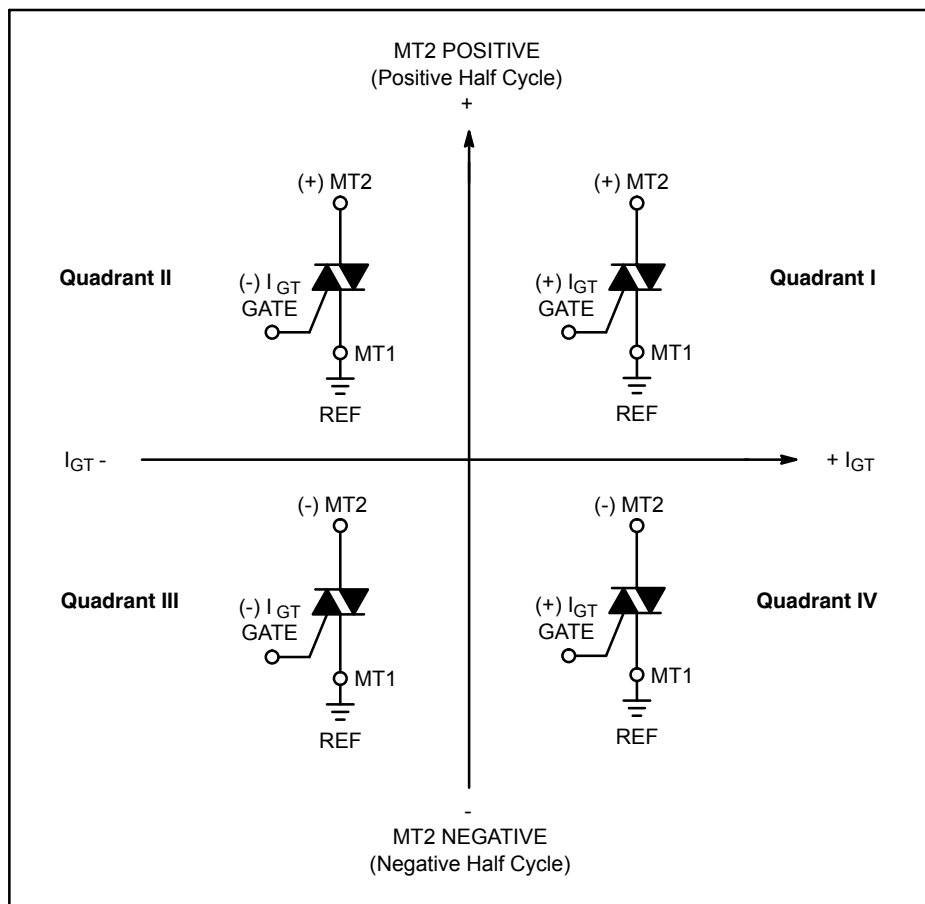

All polarities are referenced to MT1.

With in-phase signals (using standard AC lines) quadrants I and III are used.

### SENSITIVE GATE LOGIC REFERENCE

| IC Logic Functions    | Firing Quadrant |                |                |                |
|-----------------------|-----------------|----------------|----------------|----------------|
|                       | I               | II             | III            | IV             |
| TTL                   |                 | 2N6071A Series | 2N6071A Series |                |
| HTL                   |                 | 2N6071A Series | 2N6071A Series |                |
| CMOS (NAND)           | 2N6071B Series  |                |                | 2N6071B Series |
| CMOS (Buffer)         |                 | 2N6071B Series | 2N6071B Series |                |
| Operational Amplifier | 2N6071A Series  |                |                | 2N6071A Series |
| Zero Voltage Switch   |                 | 2N6071A Series | 2N6071A Series |                |

## 2N6071A/B Series

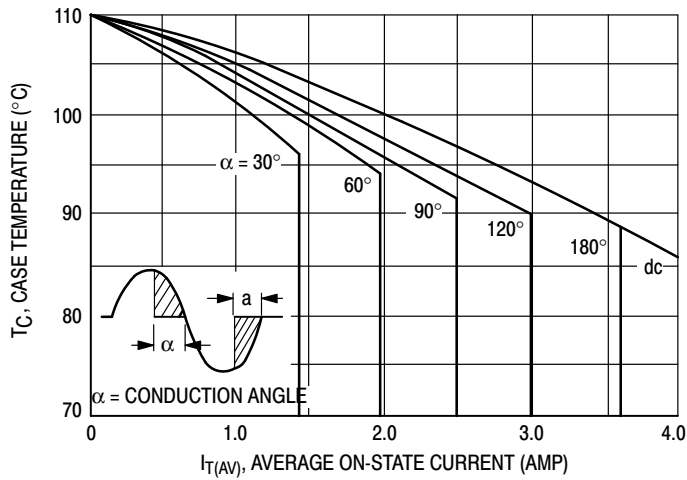


Figure 1. Average Current Derating

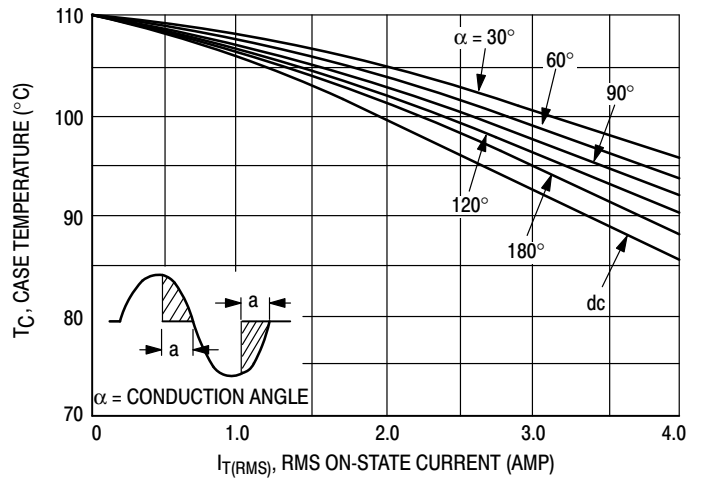


Figure 2. RMS Current Derating

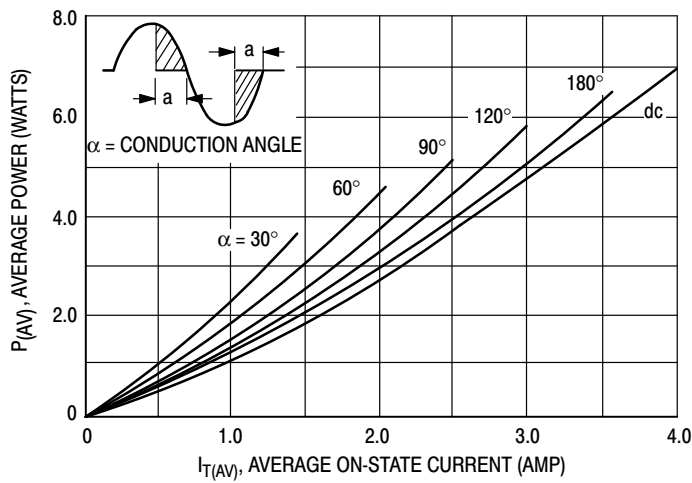


Figure 3. Power Dissipation

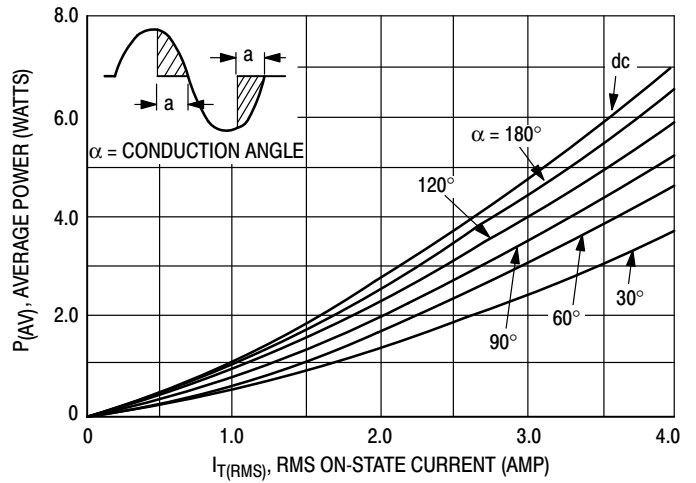


Figure 4. Power Dissipation

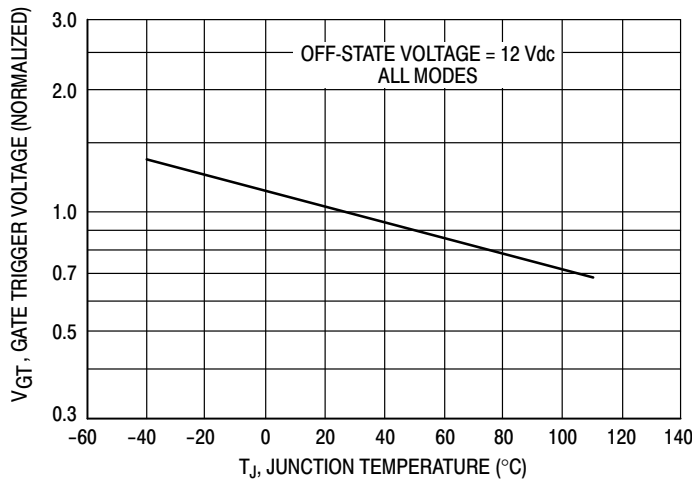


Figure 5. Typical Gate-Trigger Voltage

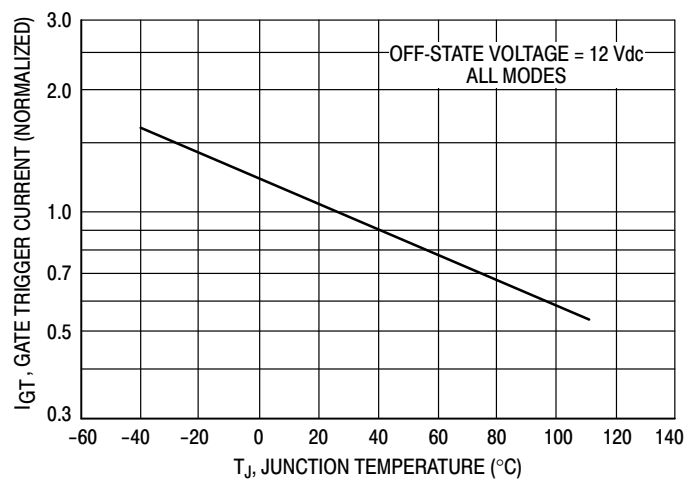


Figure 6. Typical Gate-Trigger Current

## 2N6071A/B Series

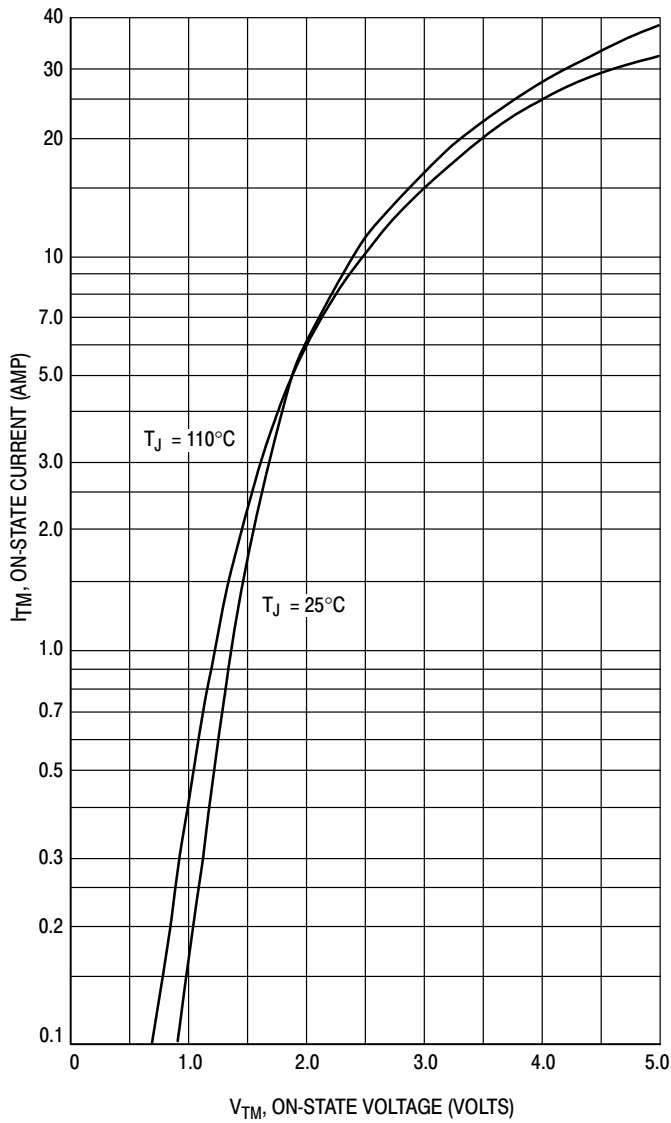


Figure 7. Maximum On-State Characteristics

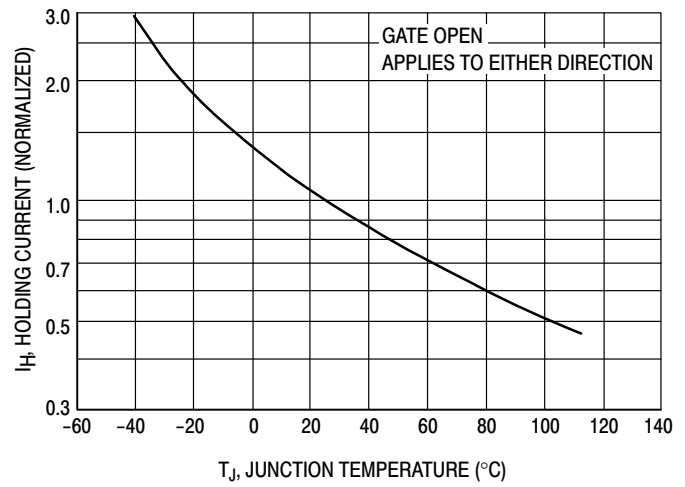


Figure 8. Typical Holding Current

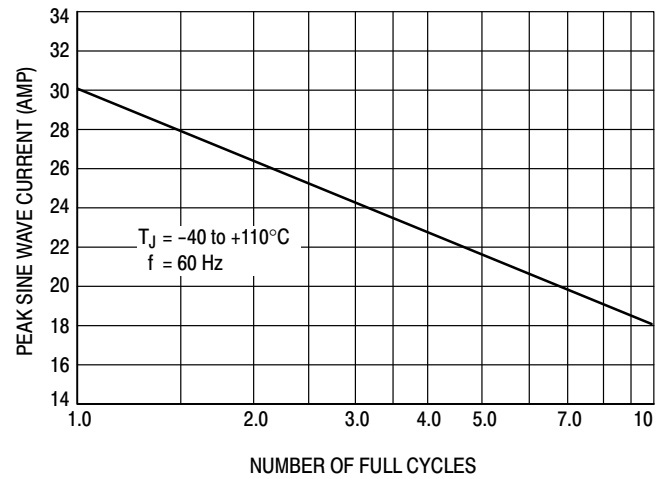


Figure 9. Maximum Allowable Surge Current

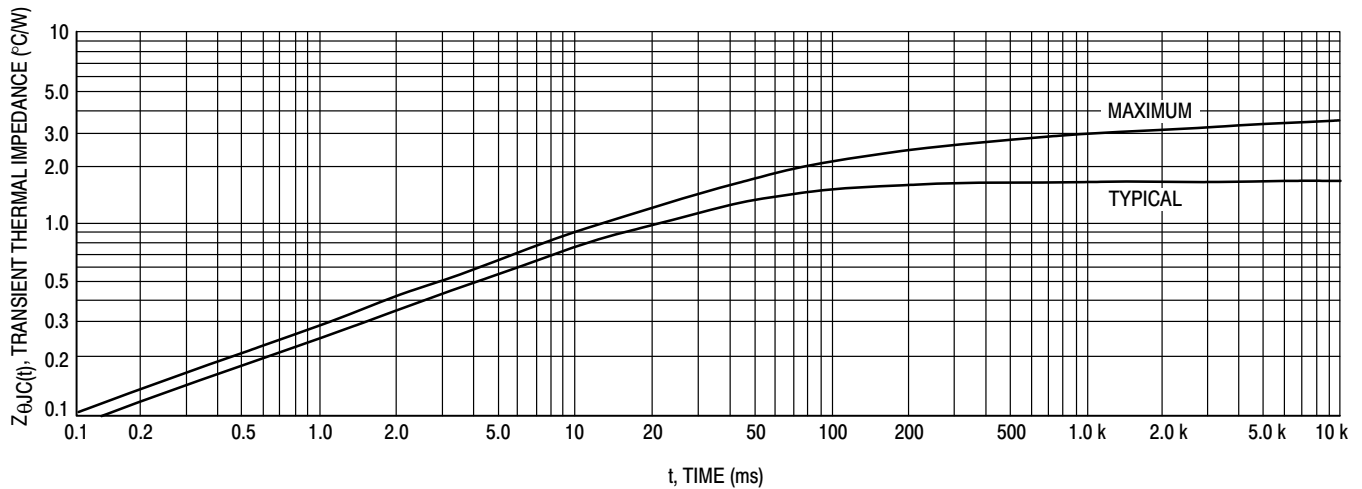


Figure 10. Thermal Response

## 2N6071A/B Series


### ORDERING INFORMATION

| Device    | Package             | Shipping <sup>†</sup>               |
|-----------|---------------------|-------------------------------------|
| 2N6071A   | TO-225              | 500 Units / Box                     |
| 2N6071AG  | TO-225<br>(Pb-Free) |                                     |
| 2N6071AT  | TO-225              | 50 Units / Tube<br>2000 Units / Box |
| 2N6071ATG | TO-225<br>(Pb-Free) | 50 Units / Tube<br>2000 Units / Box |
| 2N6071B   | TO-225              | 500 Units / Box                     |
| 2N6071BG  | TO-225<br>(Pb-Free) |                                     |
| 2N6071BT  | TO-225              | 50 Units / Tube<br>2000 Units / Box |
| 2N6071BTG | TO-225<br>(Pb-Free) | 50 Units / Tube<br>2000 Units / Box |
| 2N6073A   | TO-225              | 500 Units / Box                     |
| 2N6073AG  | TO-225<br>(Pb-Free) |                                     |
| 2N6073B   | TO-225              |                                     |
| 2N6073BG  | TO-225<br>(Pb-Free) |                                     |
| 2N6075A   | TO-225              |                                     |
| 2N6075AG  | TO-225<br>(Pb-Free) |                                     |
| 2N6075B   | TO-225              |                                     |
| 2N6075BG  | TO-225<br>(Pb-Free) |                                     |

# 2N6071A/B Series

## PACKAGE DIMENSIONS

TO-225  
CASE 77-09  
ISSUE Z

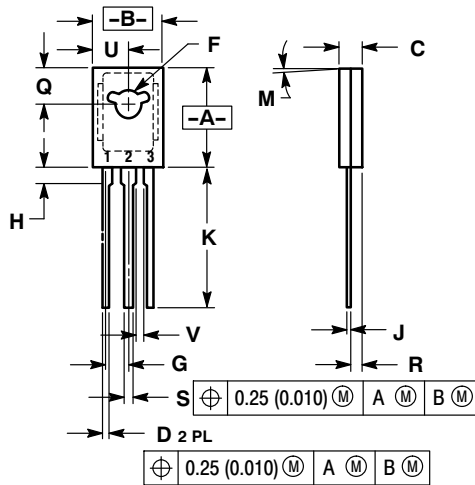

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 077-01 THRU -08 OBSOLETE, NEW STANDARD 077-09.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.425     | 0.435 | 10.80       | 11.04 |
| B   | 0.295     | 0.305 | 7.50        | 7.74  |
| C   | 0.095     | 0.105 | 2.42        | 2.66  |
| D   | 0.020     | 0.026 | 0.51        | 0.66  |
| F   | 0.115     | 0.130 | 2.93        | 3.30  |
| G   | 0.094 BSC |       | 2.39 BSC    |       |
| H   | 0.050     | 0.095 | 1.27        | 2.41  |
| J   | 0.015     | 0.025 | 0.39        | 0.63  |
| K   | 0.575     | 0.655 | 14.61       | 16.63 |
| M   | 5° TYP    |       | 5° TYP      |       |
| Q   | 0.148     | 0.158 | 3.76        | 4.01  |
| R   | 0.045     | 0.065 | 1.15        | 1.65  |
| S   | 0.025     | 0.035 | 0.64        | 0.88  |
| U   | 0.145     | 0.155 | 3.69        | 3.93  |
| V   | 0.040     | ---   | 1.02        | ---   |

### STYLE 5:

1. MT 1
2. MT 2
3. GATE

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

Littelfuse.com