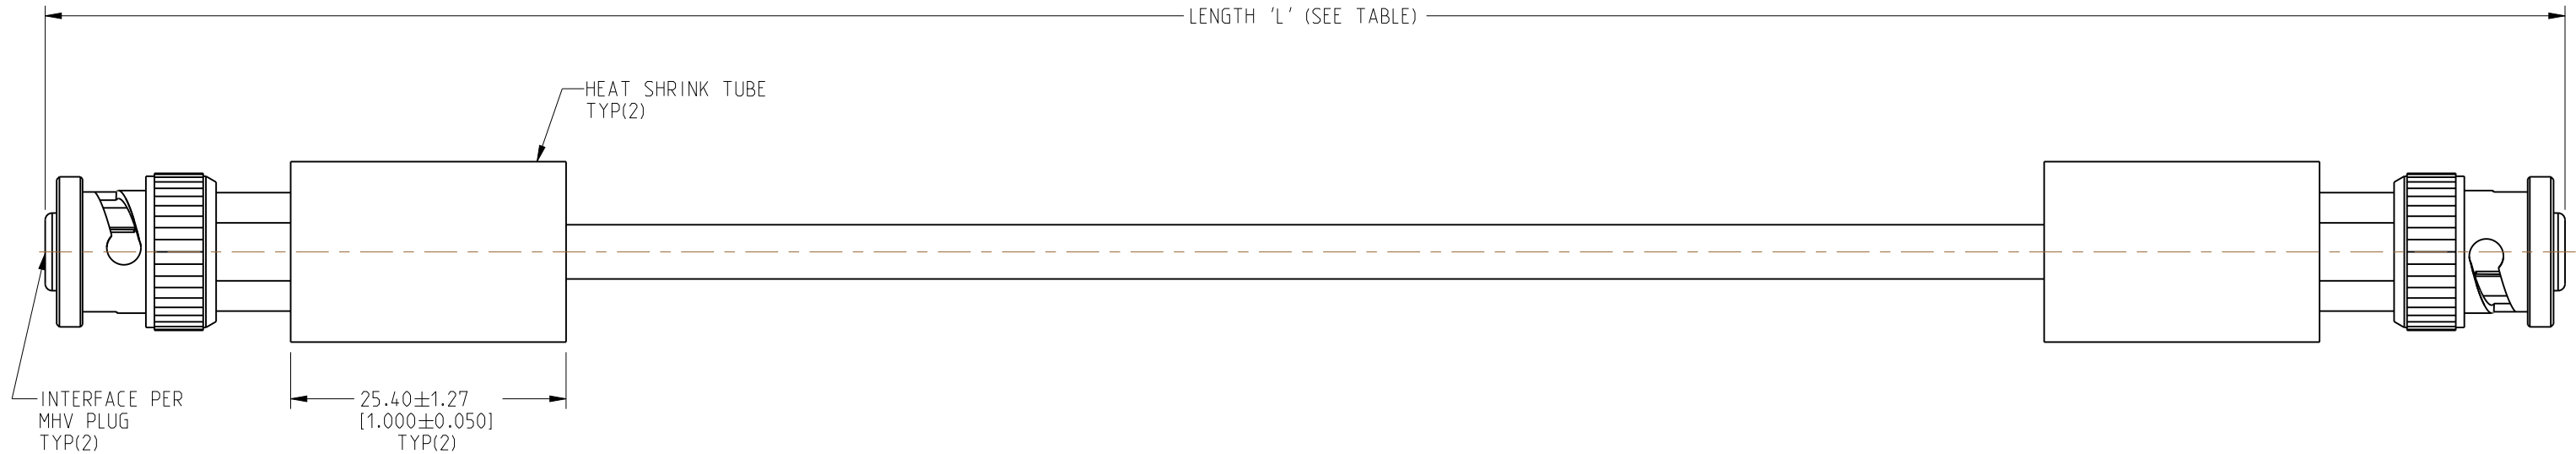


3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-825-121-XXX AND DATE CODE".

SCALE 0.400

LENGTH TABLE		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES [METERS]
-	95-825-121M025	9.84 [0.250]
95-825-121-012	-	12.00 [0.305]
95-825-121-018	-	18.00 [0.457]
-	95-825-121M050	19.69 [0.500]
95-825-121-024	-	24.00 [0.610]
95-825-121-036	-	36.00 [0.914]
-	95-825-121M100	39.37 [1.000]
95-825-121-048	-	48.00 [1.219]
-	95-825-121M200	78.74 [2.000]
-	95-825-121M300	118.11 [3.000]

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.99" [0 - 0.609]	±0.25" [0.006]
24.00" - 59.99" [0.610 - 1.523]	±0.50" [0.013]
5.0' - 24.99' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

<input checked="" type="checkbox"/> FREQUENCY: DC - 500 MHz	<input checked="" type="checkbox"/> CONTINUITY
<input type="checkbox"/> VSWR: ____ 1 MAX.	<input checked="" type="checkbox"/> HI-POT: 5000 VRMS
<input type="checkbox"/> INS. LOSS: ____ dB MAX.	<input type="checkbox"/> OTHER

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Amphenol RF			
SIZE B	DRAWING NO.	95-825-121-XXX	REV A
	ITEM NO.	95-825-121-XXX	
	PART NO.	95-825-121-XXX	

THIRD ANGLE PROJ. 

REFERENCE

REFERENCE	EAR# 11747
-----------	---------------

 ANGLES = $\pm 1^\circ$

ENGR.1
SIVA

ENGR.2

DATE
22-FEB-23

SHEET NO. 2 OF 2

SCALE: 1.7:1.0

SIZE B	DRAWING NO.	95-825-121-XXX	REV A
	ITEM NO.	95-825-121-XXX	
	PART NO.	95-825-121-XXX	