Product Summary

BV_{DSS}	$R_{DS(ON)}$ Max	I_D Max T_A = +25°C
20V	0.4Ω @ V_{GS} = 4.5V	1.3A
	0.5Ω @ V_{GS} = 2.5V	1.2A
	0.7Ω @ V_{GS} = 1.8V	1.0A

Features and Benefits

- Footprint of just 0.6mm^2 – Thirteen Times Smaller than SOT23
- 0.4mm Profile – Ideal for Low Profile Applications
- Low Gate Threshold Voltage
- Fast Switching Speed
- **ESD Protected Gate**
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **The DMN2451UFB4Q is suitable for automotive applications requiring specific change control; this part is AEC-Q101 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.**
  https://www.diodes.com/quality/product-definitions/

Description and Applications

This MOSFET is designed to minimize the on-state resistance ($R_{DS(ON)}$) yet maintain superior switching performance, making it ideal for high-efficiency power management applications.

- Load Switch

Mechanical Data

- Case: X2-DFN1006-3
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – NiPdAu over Copper Lead-Frame. Solderable per MIL-STD-202, Method 208 e4
- Weight: 0.001 grams (Approximate)

ESD Protected Gate

X2-DFN1006-3

Bottom View



Top View
Internal Schematic



Equivalent Circuit

Ordering Information (Note 4)

Part Number	Marking	Reel Size (inches)	Tape Width (mm)	Tape Pitch (mm)	Packaging
DMN2451UFB4Q-7B	46	7	8	2	10,000/Reel
DMN2451UFB4Q-7R	46	7	8	4	3,000/Reel

Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

© Diodes Incorporated
Downloaded from Arrow.com.

Marking Information

DMN2451UFB4Q-7R	 Top View Bar Denotes Gate and Source Side 	$\overline{46}$ = Part Marking Code
DMN2451UFB4Q-7B	 Top View Bar Denotes Gate and Source Side 	$\overline{46}$ = Part Marking Code

© Diodes Incorporated

Downloaded from Arrow.com.

Maximum Ratings (@ T_A = +25°C, unless otherwise specified.)

Characteristic			Symbol	Value	Unit
Drain-Source Voltage			V_{DSS}	20	V
Gate-Source Voltage			V_{GSS}	±12	V
Continuous Drain Current (Note 6) V_{GS} = 4.5V	Steady State	T_A = +25°C T_A = +70°C	I_D	1.3 1.0	A
Pulsed Drain Current (10µs Pulse, Duty Cycle = 1%)			I_{DM}	3	A

Thermal Characteristics (@ T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Total Power Dissipation (Note 5)	P_D	0.66	W
Thermal Resistance, Junction to Ambient (Note 5)	$R_{\theta JA}$	189	°C/W
Total Power Dissipation (Note 6)	P_D	1.1	W
Thermal Resistance, Junction to Ambient (Note 6)	$R_{\theta JA}$	113	°C/W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

Electrical Characteristics (@ T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 7)						
Drain-Source Breakdown Voltage	BV_{DSS}	20	—	—	V	V_{GS} = 0V, I_D = 250µA
Zero Gate Voltage Drain Current T_J = +25°C	I_{DSS}	—	—	100	nA	V_{DS} = 20V, V_{GS} = 0V
Gate-Source Leakage	I_{GSS}	—	—	±1.0	µA	V_{GS} = ±4.5V, V_{DS} = 0V
ON CHARACTERISTICS (Note 7)						
Gate Threshold Voltage	$V_{GS(TH)}$	0.5	—	1.0	V	V_{DS} = V_{GS}, I_D = 250µA
Static Drain-Source On-Resistance	$R_{DS(ON)}$	—	0.26	0.4	Ω	V_{GS} = 4.5V, I_D = 600mA
		—	0.35	0.5		V_{GS} = 2.5V, I_D = 500mA
		—	0.5	0.7		V_{GS} = 1.8V, I_D = 350mA
Diode Forward Voltage	V_{SD}	—	0.7	1.2	V	V_{GS} = 0V, I_S = 150mA
DYNAMIC CHARACTERISTICS (Note 8)						
Input Capacitance	C_{iss}	—	32	—	pF	V_{DS} =16V, V_{GS} = 0V, f = 1.0MHz
Output Capacitance	C_{oss}	—	5.5	—	pF	
Reverse Transfer Capacitance	C_{rss}	—	3.7	—	pF	
Gate Resistance	R_g	—	86	—	Ω	V_{DS} = 0V, V_{GS} = 0V
Total Gate Charge (V_{GS} = 4.5V)	Q_g	—	3.4	—	nC	V_{DS} = 10V, I_D = 250mA
Total Gate Charge (V_{GS} = 10V)	Q_g	—	6.4	—	nC	
Gate-Source Charge	Q_{gs}	—	0.4	—	nC	
Gate-Drain Charge	Q_{gd}	—	1.3	—	nC	
Turn-On Delay Time	$t_{D(ON)}$	—	5.5	—	ns	V_{DD} = 10V, V_{GS} = 4.5V, R_L = 47Ω, R_g = 10Ω, I_D = 200mA
Turn-On Rise Time	t_R	—	2.9	—	ns	
Turn-Off Delay Time	$t_{D(OFF)}$	—	11	—	ns	
Turn-Off Fall Time	t_F	—	12	—	ns	

Notes:
5. Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.
6. Device mounted on FR-4 substrate PC board, 2oz copper, with 25mm X 25mm square copper plate.
7. Short duration pulse test used to minimize self-heating effect.
8. Guaranteed by design. Not subject to product testing.

© Diodes Incorporated
Downloaded from Arrow.com.

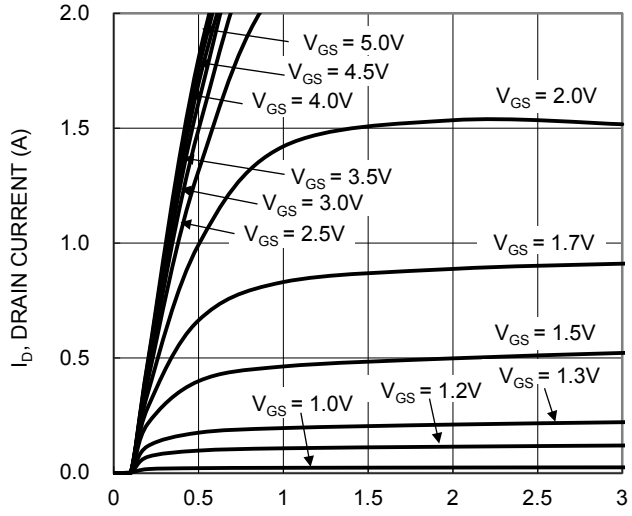

Figure 1. Typical Output Characteristic

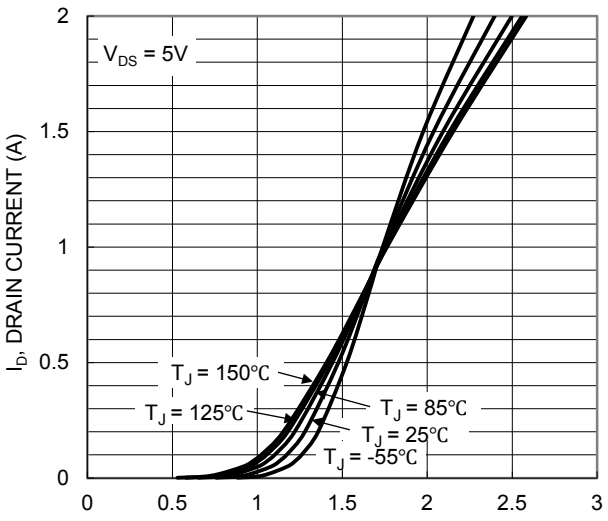

Figure 2. Typical Transfer Characteristic

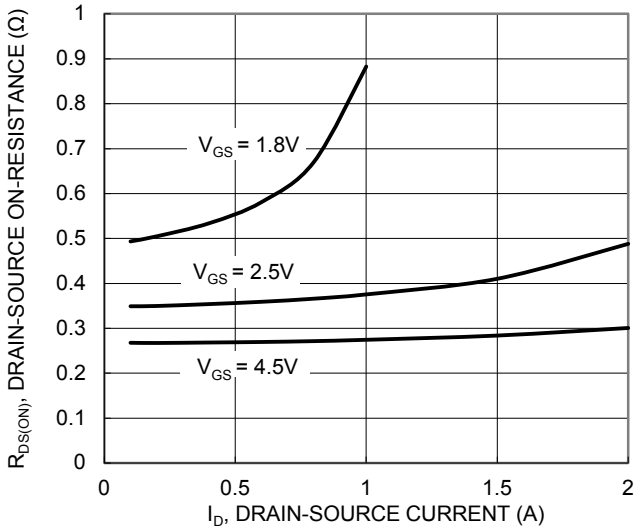

Figure 3. Typical On-Resistance vs. Drain Current and Gate Voltage

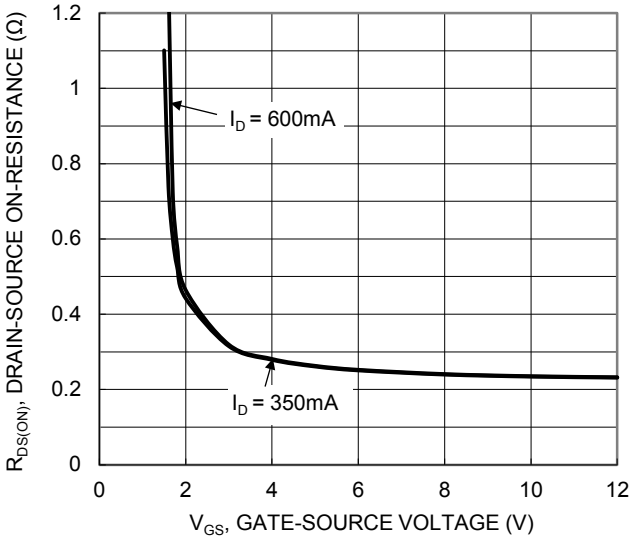

Figure 4. Typical Transfer Characteristic

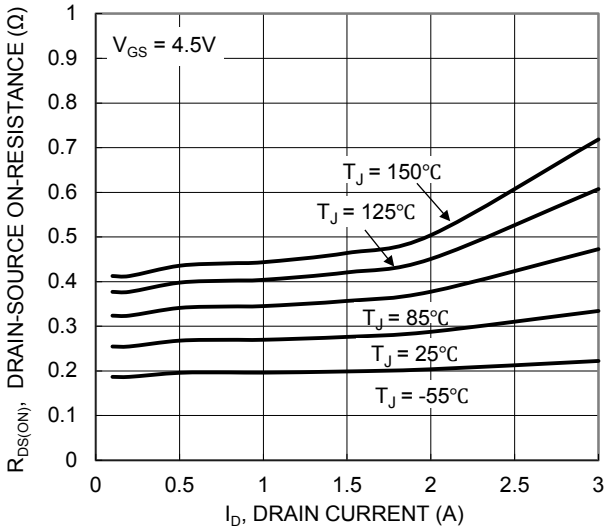

Figure 5. Typical On-Resistance vs. Drain Current and Junction Temperature

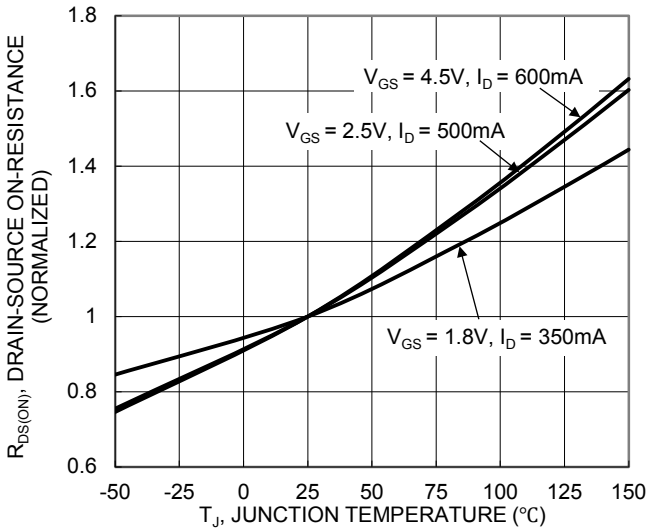

Figure 6. On-Resistance Variation with Junction Temperature

© Diodes Incorporated
Downloaded from Arrow.com.

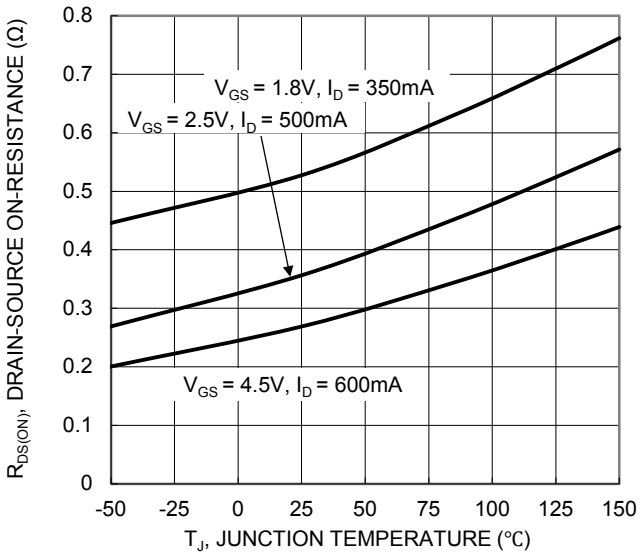

Figure 7. On-Resistance Variation with Junction Temperature

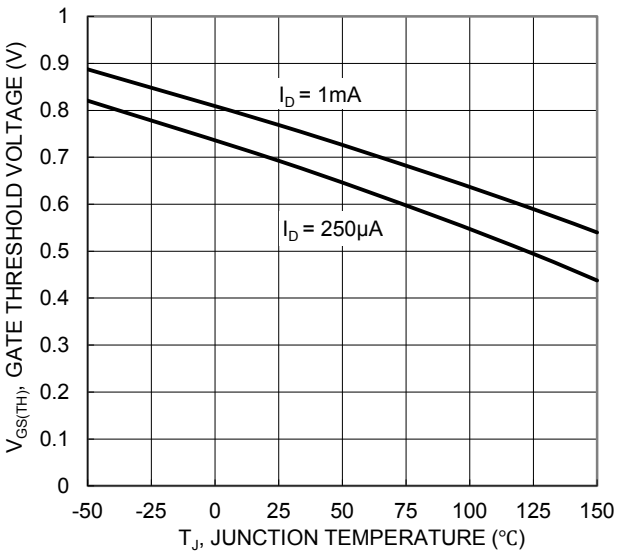

Figure 8. Gate Threshold Variation vs. Junction Temperature

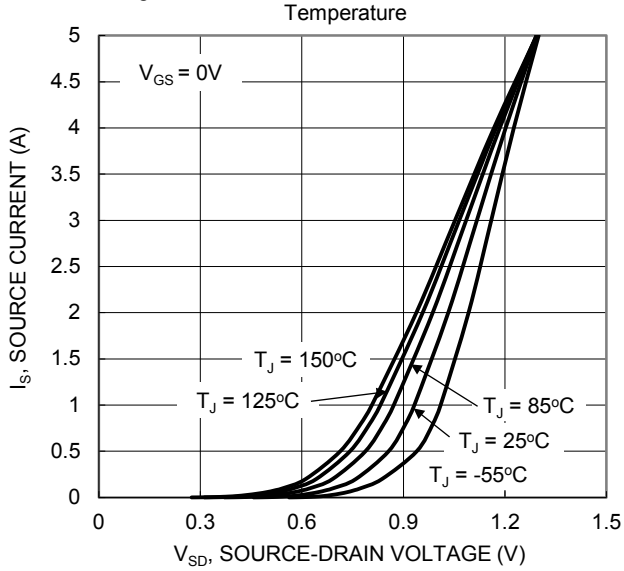

Figure 9. Diode Forward Voltage vs. Current

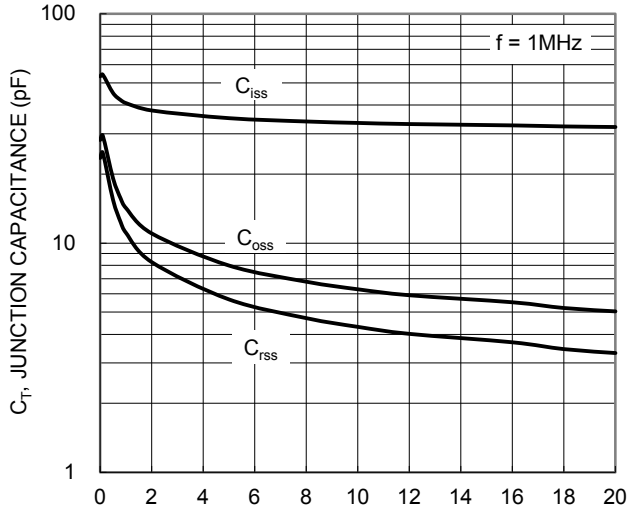

Figure 10. Typical Junction Capacitance

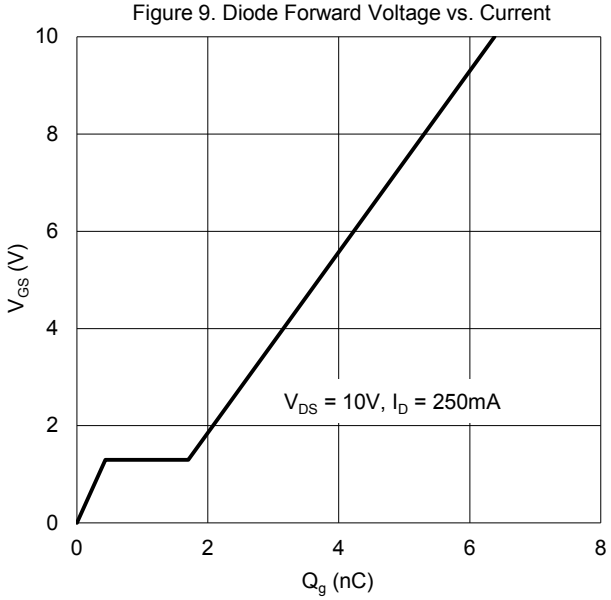

Figure 11. Gate Charge

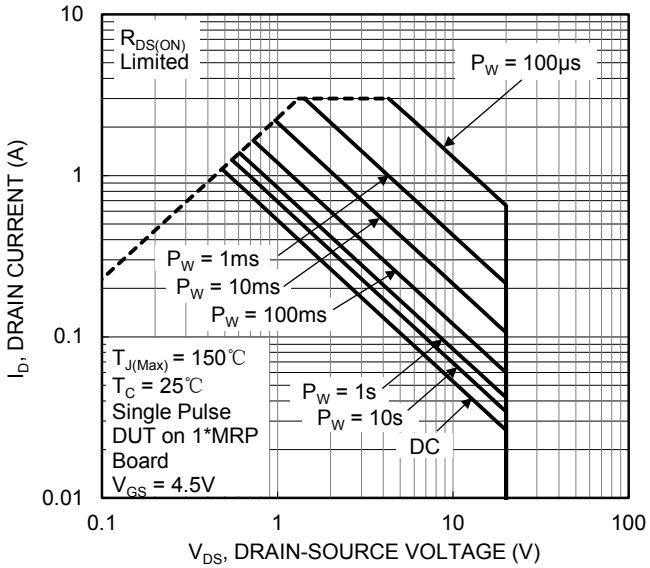

Figure 12. SOA, Safe Operation Area

© Diodes Incorporated
Downloaded from Arrow.com.

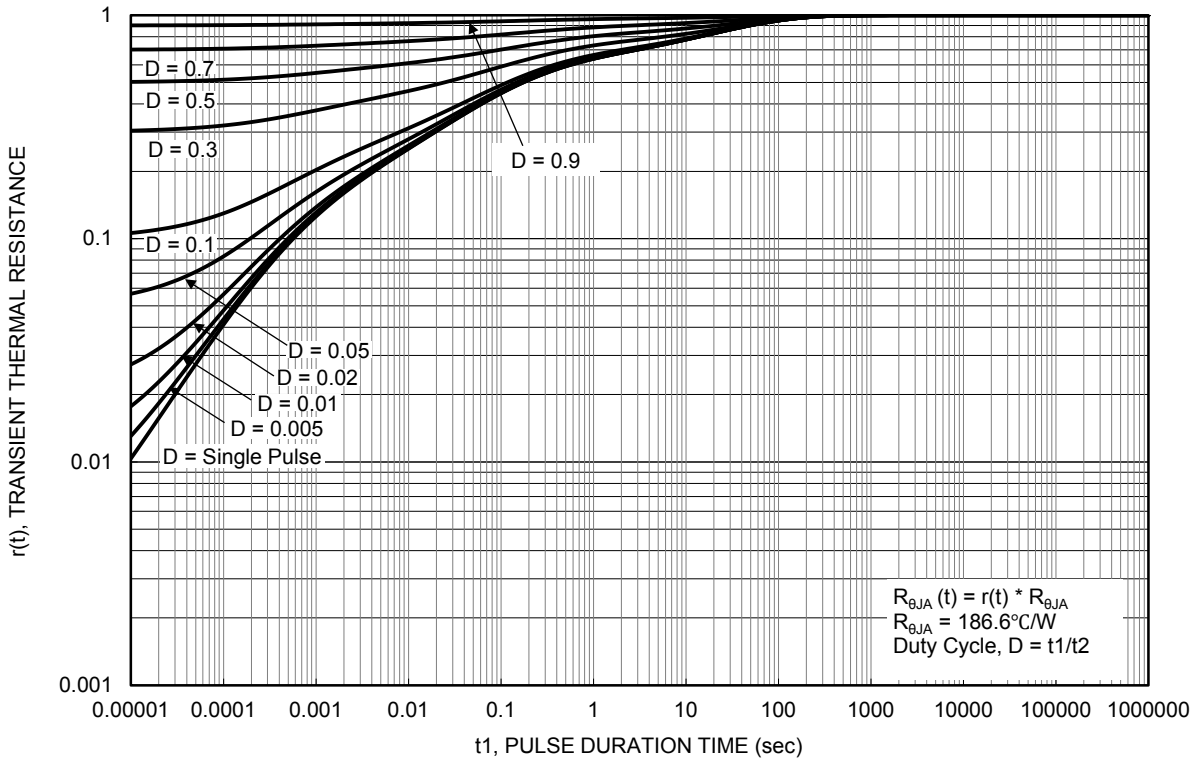

Figure 13. Transient Thermal Resistance

© Diodes Incorporated

Downloaded from Arrow.com.

Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

X2-DFN1006-3

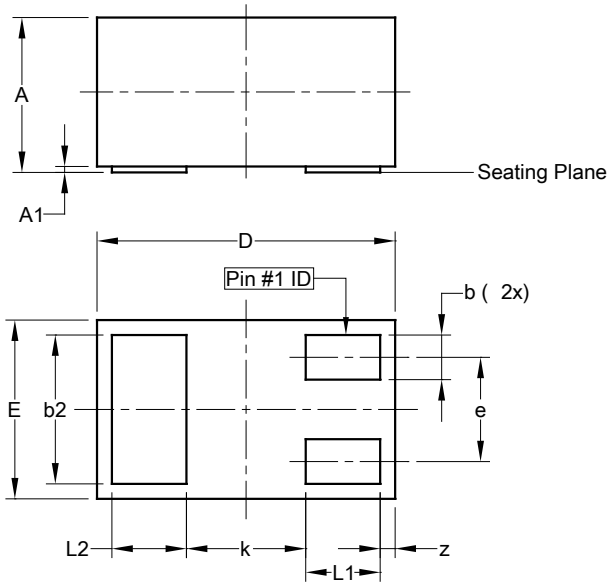

X2-DFN1006-3			
Dim	**Min**	**Max**	**Typ**
A	—	0.40	—
A1	0.00	0.05	0.03
b	0.10	0.20	0.15
b2	0.45	0.55	0.50
D	0.95	1.05	1.00
E	0.55	0.65	0.60
e	-	-	0.35
L1	0.20	0.30	0.25
L2	0.20	0.30	0.25
k	-	-	0.40
z	0.02	0.08	0.05
All Dimensions in mm			

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

X2-DFN1006-3

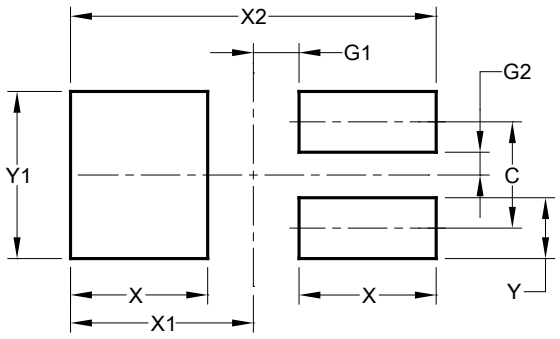

Dimensions	Value (in mm)
C	0.350
G1	0.150
G2	0.075
X	0.450
X1	0.600
X2	1.200
Y	0.200
Y1	0.550

© Diodes Incorporated

Downloaded from Arrow.com.

IMPORTANT NOTICE

1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.

3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.

4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.

5. Diodes products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.

7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.

8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2021 Diodes Incorporated

www.diodes.com

Downloaded from Arrow.com.