High Voltage Isolator

OPI1268

Features:

- TTL compatible output
- 16 kV dc isolation
- 2Mbit/s
- t_{PHL}-t_{PLH} ≤ 500 ns
- Creepage path: 0.970" (24.64 mm)
- Air path: 0.970" (24.64 mm)
- UL recognized file No. E58730

Description:

The **OPI1268** is a high voltage isolator with a digital output that is capable of high speed data transmission. The input of the OPI1268 consists of a high-efficiency GaAlAs LED with a peak wavelength of 850 nm, which is optically coupled to the output optical IC. A photodiode in the output IC detects the incoming modulated light and converts it to a proportionate current. This current is fed into a high-gain linear amplifier which is temperature, current and voltage compensated. The result is a highly stable digital output with an open collector inverter configuration. This device produces DC and AC voltage isolation between the input and output circuitry while providing TTL signal integrity.

Applications:

- Data transmission for High voltage isolation
- PCBoard power system isolation
- Industrial equipment power isolation
- Medical equipment power isolation
- Office equipment

Ordering Information							
Part Number	LED Peak Wavelength	Sensor Photologic®	Isolation Voltage kVDC	t_{PLH} / t_{PHL} Max (ns)	I_F (mA) Typ / Max	V_{CE} (V) Max	Lead Length / Spacing
OPI1268	850 nm	Open Collector	16	100 / 200	10 / 50	18	0.12" / 0.98"

Pin	Function
1	Cathode
2	Anode
3	Vcc
4	Output
5	Ground

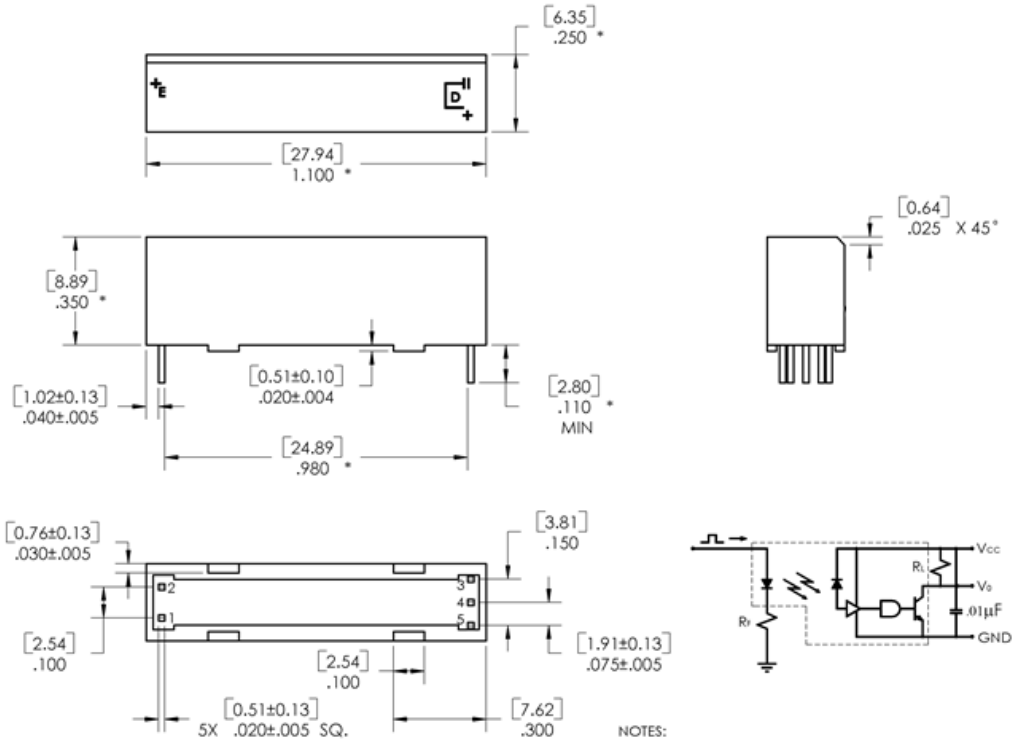

Pb-Free (RoHS)

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Storage Temperature	-40° C to +100° C
Operating Temperature	-40° C to +100° C
Input-to-Output Isolation Voltage[2]	16 kVDC
Lead Soldering Temperature (1/16" (1.6 mm) from case for 5 seconds with soldering iron)[3]	260° C
Input Diode	
Continuous Forward Current	30 mA
Peak Forward current (1 µs pulse width, 300 pps)	3.0 A
Reverse Voltage	3.0 V
Power Dissipation[1]	100 mW
Output IC	
Maximum Supply Voltage	7 V
Power Dissipation[4]	40 mW
Maximum Output Voltage	18 V
Maximum Output Current	25 mA

Electrical Characteristics (T_A = 0° C to 70° C unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode						
V_F	Forward Voltage	-	1.3	1.6	V	I_F = 20 mA
I_R	Reverse Current	-	0.1	100	µA	V_R = 2.0 V
Output IC (V_{CC} = 4.5 V to 5.25 V) (See OPL550 for additional information—for reference only.)						
I_{OH}	High Level Output Current	-	0.20	10	µA	I_F = 0.0 mA, V_{OH} = 18.0 V, Vcc = 5.25 V
V_{OL}	Low Level Output Voltage	-	0.44	0.55	V	I_F = 10.0 mA, I_{OL} = 8.0 mA, Vcc = 4.5 V
I_{CCH}	High Level Supply Current	-	4.2	7	mA	I_F = 0, Vcc = 5.25V
I_{CCL}	Low Level Supply Current	-	6.7	10		I_F = 10.0 mA, Vcc = 5.25 V
Coupled Characteristics (V_{CC} = 5 V)						
C_{IO}	Coupling Capacitance	-	-	2	pF	Input and output leads shorted.
t_{PLH}	Propagation Delay to Low Output Level	-	-	200	ns	Vcc=5V, I_F=30mA, R_L=560Ω
t_{PHL}	Propagation Delay to High Output Level	-	-	100		
I_{ISO}	Isolation Leakage Current[5]	-	-	20	µA	VISO = 19.2kV dc
I_F+	LED Positive Going Threshold Current	0.8	1.7	5.0	mA	V_{CC} = 5V, I_{OL} = 8.0mA

Notes:
(1) Derate LED linearly 1.33 mW/°C above 25°C.
(2) UL recognition is for 16kV dc for one minute.
(3) RMA flux is recommended. The duration can be extended to 10 seconds maximum when flow soldering.
(4) Derate linearly 0.54m W/°C above 25°C.
(5) Measured with input leads shorted together and output leads shorted together in air with a maximum relative humidity of 50%.

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

IF(+) vs Ta

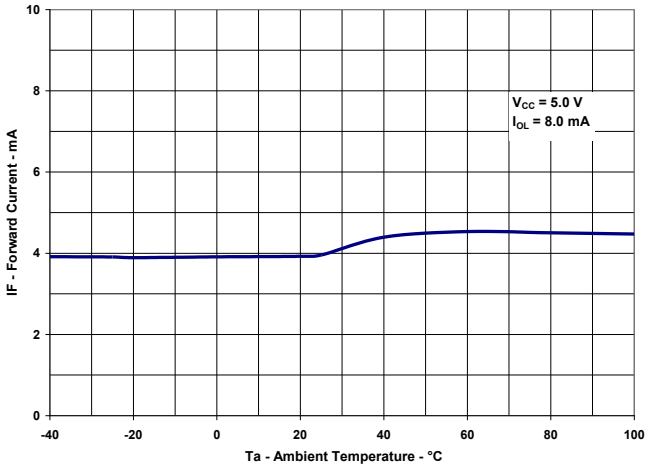

$V_{(out)}$ vs I_F

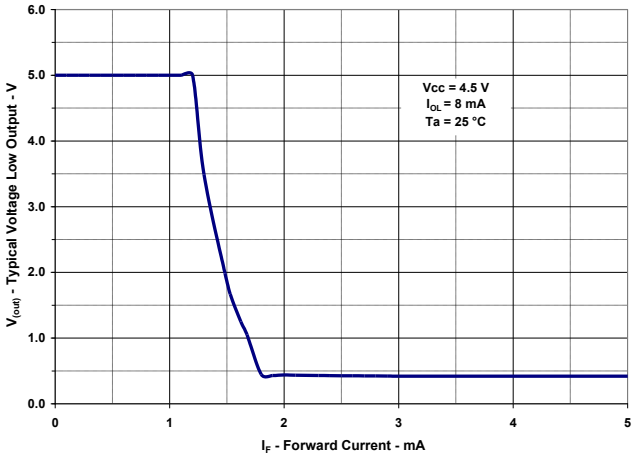

Vol vs Ambient Temperature

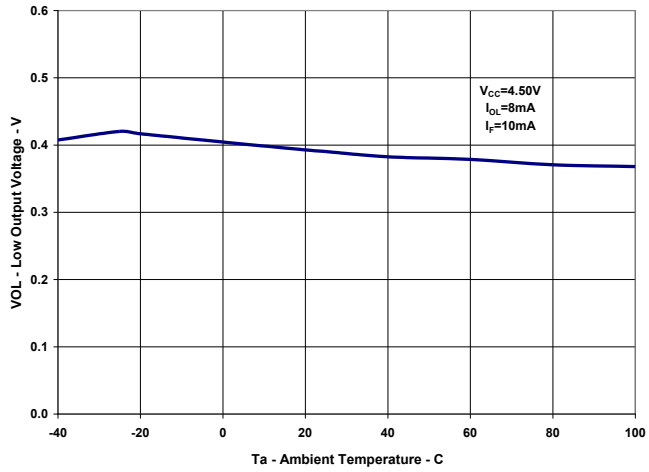

I_{OH} vs. Ambient Temperature

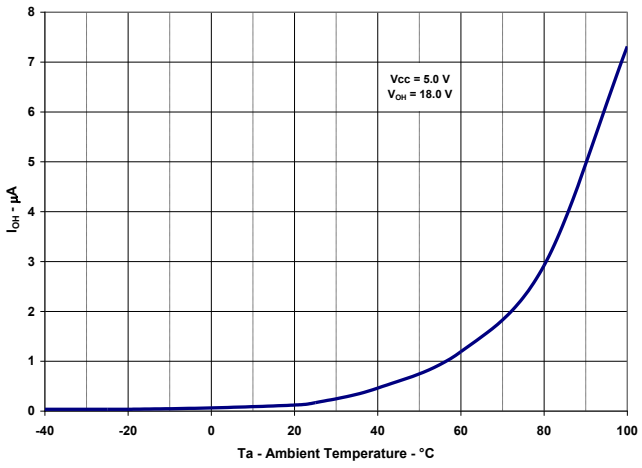

Supply Current vs I_{CCH} and I_{CCL} vs Ambient temperature

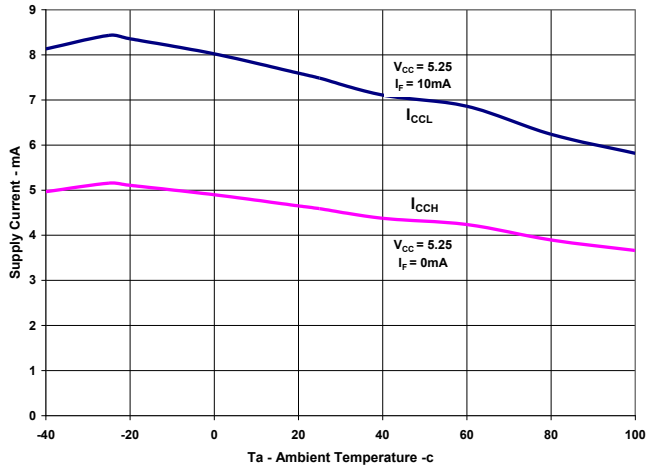

Variable Diode Forward Current (I_F) vs Propagation Delay Time - (t_{PLH}, t_{PHL})

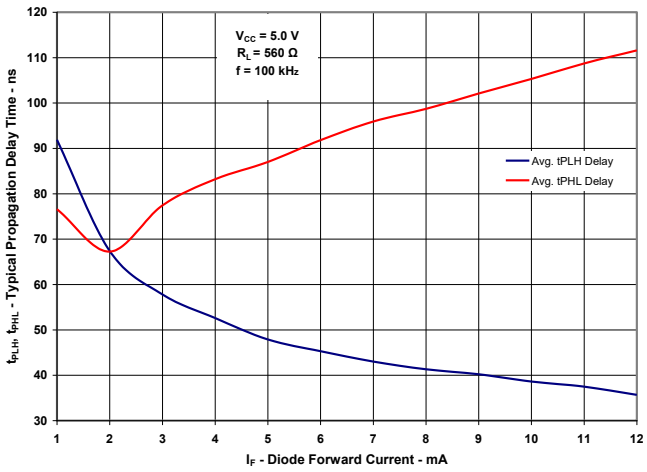

dV/dT

OPI1268 dV/dT Emitter

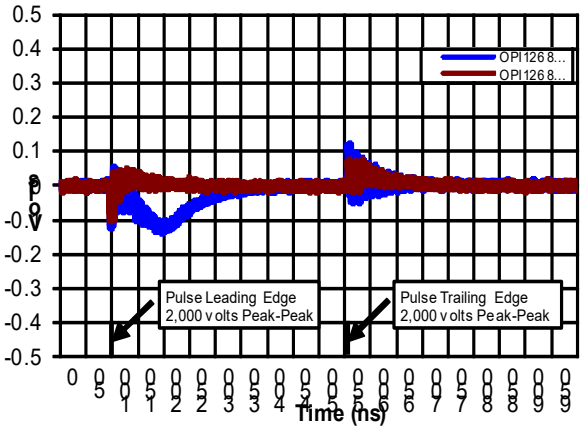

OPI1268 dV/dT Sensor

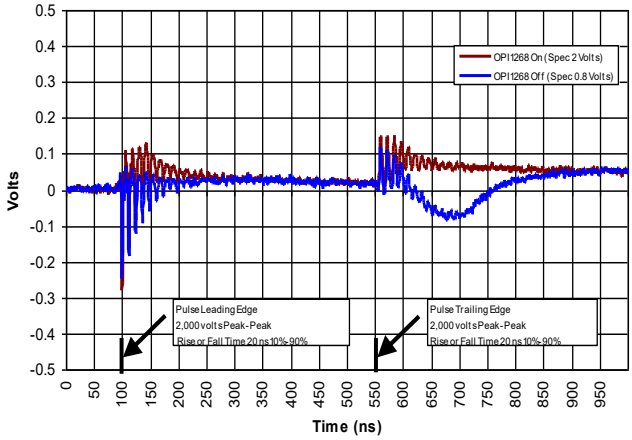

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com