

MOSFET – N-Channel, POWERTRENCH® 100 V, 2.7 A, 109 mΩ

FDN8601

General Description

This N-Channel MOSFET is produced using onsemi's advanced POWERTRENCH process that has been optimized for $r_{DS(on)}$, switching performance and ruggedness.

Features

- Max $r_{DS(on)} = 109 \text{ m}\Omega$ at $V_{GS} = 10 \text{ V}$, $I_D = 1.5 \text{ A}$
- Max $r_{DS(on)} = 175 \text{ m}\Omega$ at $V_{GS} = 6 \text{ V}$, $I_D = 1.2 \text{ A}$
- High Performance Trench Technology for Extremely Low $r_{DS(on)}$
- High Power and Current Handling Capability in a Widely Used Surface Mount Package
- Fast Switching Speed
- 100% UIL Tested
- This Device is Pb-Free, Halide Free and is RoHS Compliant

Applications

- Primary DC-DC Switch
- Load Switch

MOSFET MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$, unless otherwise noted)


Symbol	Parameter	Ratings	Unit
V_{DS}	Drain to Source Voltage	100	V
V_{GS}	Gate to Source Voltage	± 20	V
I_D	Continuous (Note 1a)	2.7	A
	Pulsed	12	
E_{AS}	Single Pulse Avalanche Energy (Note 3)	13	mJ
P_D	Power Dissipation (Note 1a)	1.5	W
	(Note 1b)	0.6	
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to 150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case (Note 1)	75	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 1a)	80	°C/W

V_{DS}	$r_{DS(on)} \text{ MAX}$	$I_D \text{ MAX}$
100 V	109 mΩ @ 10 V	2.7 A
	175 mΩ @ 6 V	




SOT-23/SUPERSOT™ -23, 3 LEAD, 1.4x2.9
CASE 527AG

MARKING DIAGRAM



8601 = Specific Device Code
M = Date Code

PIN ASSIGNMENT



ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
BV_{DSS}	Drain to Source Breakdown Voltage	$I_D = 250 \mu\text{A}, V_{\text{GS}} = 0 \text{ V}$	100	–	–	V
$\frac{\Delta \text{BV}_{\text{DSS}}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	$I_D = 250 \mu\text{A}$, referenced to 25°C	–	68	–	$\text{mV}/^\circ\text{C}$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 80 \text{ V}, V_{\text{GS}} = 0 \text{ V}$	–	–	1	μA
I_{GSS}	Gate to Source Leakage Current	$V_{\text{GS}} = \pm 20 \text{ V}, V_{\text{DS}} = 0 \text{ V}$	–	–	± 100	nA

ON CHARACTERISTICS (Note 2)

$V_{\text{GS}(\text{th})}$	Gate to Source Threshold Voltage	$V_{\text{GS}} = V_{\text{DS}}, I_D = 250 \mu\text{A}$	2.0	3.0	4.0	V
$\frac{\Delta V_{\text{GS}(\text{th})}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	$I_D = 250 \mu\text{A}$, referenced to 25°C	–	–8	–	$\text{mV}/^\circ\text{C}$
$r_{\text{DS}(\text{on})}$	Static Drain to Source On Resistance	$V_{\text{GS}} = 10 \text{ V}, I_D = 1.5 \text{ A}$	–	85.4	109	$\text{m}\Omega$
		$V_{\text{GS}} = 6 \text{ V}, I_D = 1.2 \text{ A}$	–	117	175	
		$V_{\text{GS}} = 10 \text{ V}, I_D = 1.5 \text{ A}, T_J = 125^\circ\text{C}$	–	143	183	
g_{FS}	Forward Transconductance	$V_{\text{DS}} = 10 \text{ V}, I_D = 1.5 \text{ A}$	–	8	–	S

DYNAMIC CHARACTERISTICS

C_{iss}	Input Capacitance	$V_{\text{DS}} = 50 \text{ V}, V_{\text{GS}} = 0 \text{ V}, f = 1 \text{ MHz}$	–	156	210	pF
C_{oss}	Output Capacitance		–	47	65	pF
C_{rss}	Reverse Transfer Capacitance		–	2.7	5	pF
R_g	Gate Resistance		–	1.0	–	Ω

SWITCHING CHARACTERISTICS (Note 2)

$t_{\text{d}(\text{on})}$	Turn-On Delay Time	$V_{\text{DD}} = 50 \text{ V}, I_D = 1.5 \text{ A}, V_{\text{GS}} = 10 \text{ V}, R_{\text{GEN}} = 6 \Omega$	–	4.3	10	ns
t_r	Rise Time		–	1.3	10	ns
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time		–	7.8	16	ns
t_f	Fall Time		–	3.4	10	ns
Q_g	Total Gate Charge	$V_{\text{GS}} = 0 \text{ V} \text{ to } 10 \text{ V}$ $V_{\text{DD}} = 50 \text{ V}, I_D = 1.5 \text{ A}$	–	3	5	nC
Q_g	Total Gate Charge	$V_{\text{GS}} = 0 \text{ V} \text{ to } 5 \text{ V}$ $V_{\text{DD}} = 50 \text{ V}, I_D = 1.5 \text{ A}$	–	1.8	3	nC
Q_{gs}	Gate to Source Gate Charge	$V_{\text{DD}} = 50 \text{ V}, I_D = 1.5 \text{ A}$	–	0.9	–	nC
Q_{gd}	Gate to Drain "Miller" Charge		–	0.8	–	nC

DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS


V_{SD}	Source to Drain Diode Forward Voltage	$V_{\text{GS}} = 0 \text{ V}, I_S = 1.5 \text{ A}$ (Note 2)	–	0.81	1.3	V
t_{rr}	Reverse Recovery Time	$I_F = 1.5 \text{ A}, \text{di/dt} = 100 \text{ A}/\mu\text{s}$	–	29	46	ns
Q_{rr}	Reverse Recovery Charge		–	15	27	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. $R_{\theta,\text{JA}}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta,\text{JC}}$ is guaranteed by design while $R_{\theta,\text{CA}}$ is determined by the user's board design.



a. $80^\circ\text{C}/\text{W}$ when mounted on a 1 in² pad of 2 oz copper.



b. $180^\circ\text{C}/\text{W}$ when mounted on a minimum pad.

2. Pulse Test: Pulse Width < 300 μs , Duty Cycle < 2.0%.

3. Starting $T_J = 25^\circ\text{C}$; N-ch: $L = 3 \text{ mH}, I_{AS} = 3 \text{ A}, V_{DD} = 100 \text{ V}, V_{GS} = 10 \text{ V}$.

TYPICAL CHARACTERISTICS

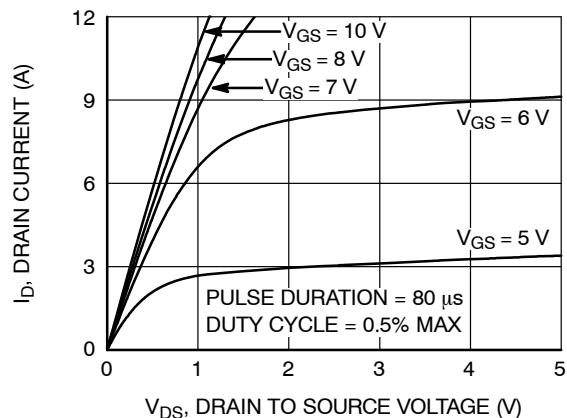
(T_J = 25°C unless otherwise noted)

Figure 1. On-Region Characteristics

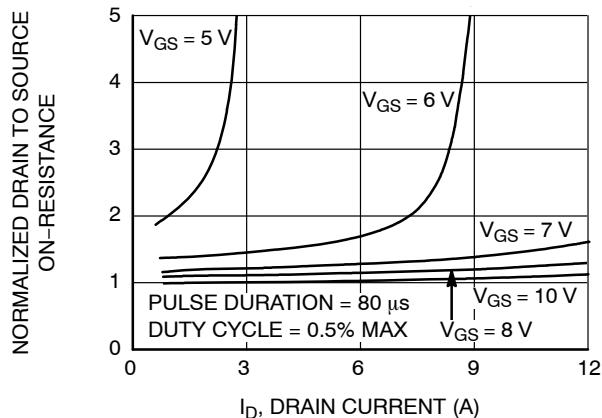


Figure 2. Normalized On-Resistance vs. Drain Current and Gate Voltage

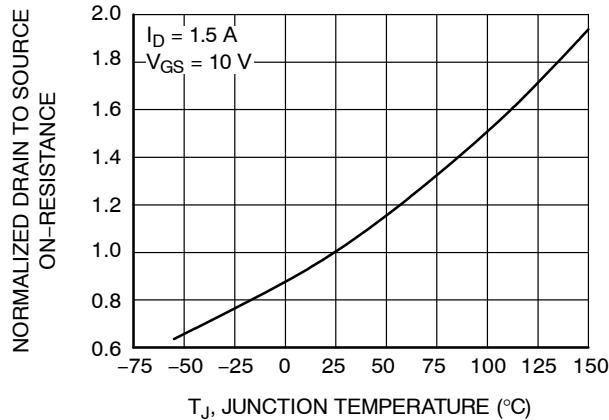


Figure 3. Normalized On-Resistance vs. Junction Temperature

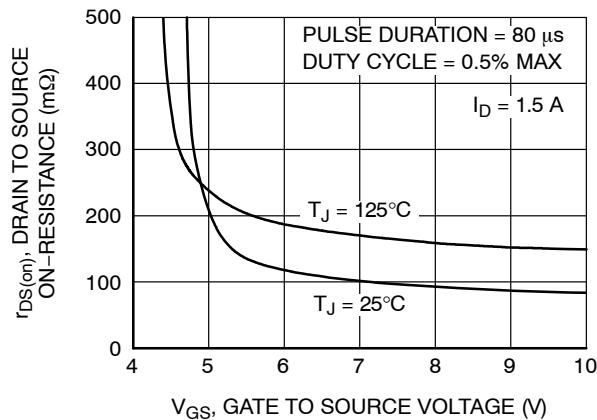


Figure 4. On-Resistance vs. Gate to Source Voltage

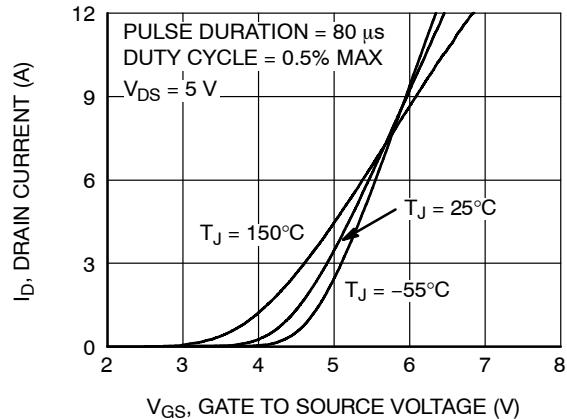


Figure 5. Transfer Characteristics

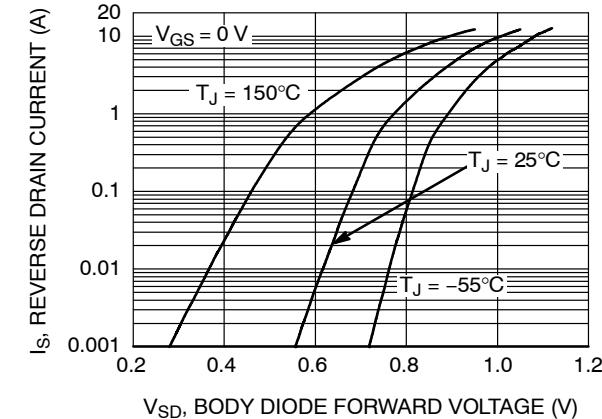


Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

TYPICAL CHARACTERISTICS

($T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

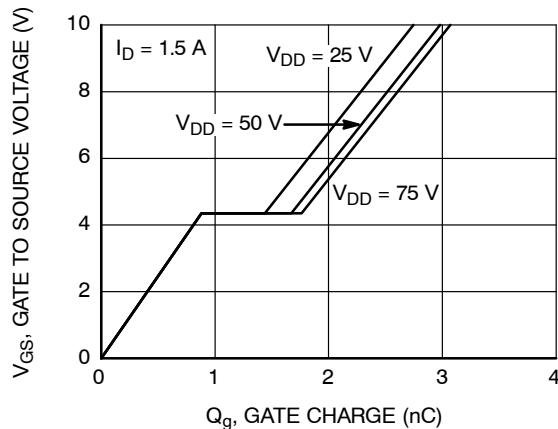


Figure 7. Gate Charge Characteristics

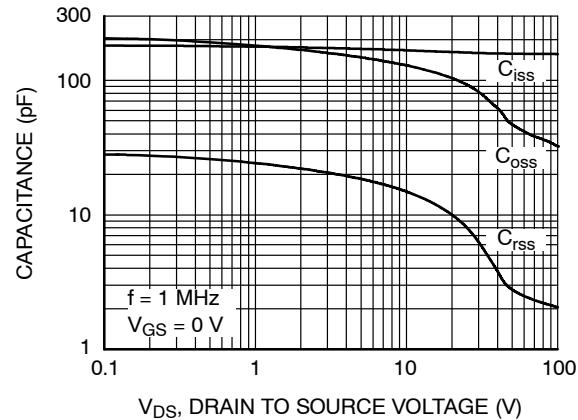


Figure 8. Capacitance vs. Drain to Source Voltage

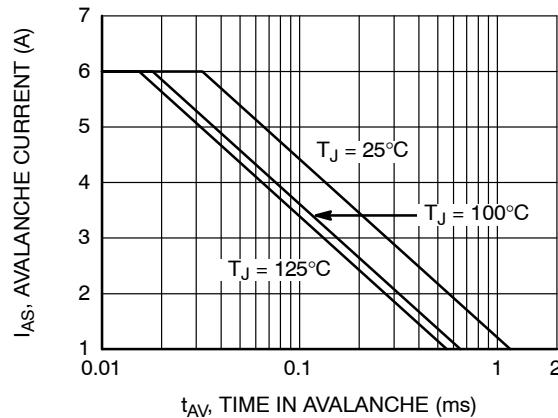


Figure 9. Unclamped Inductive Switching Capability

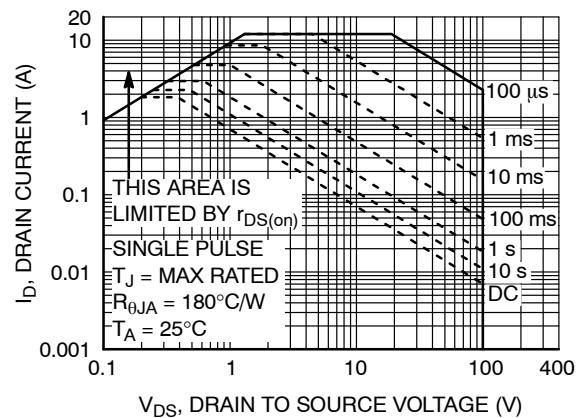


Figure 10. Forward Bias Safe Operating Area

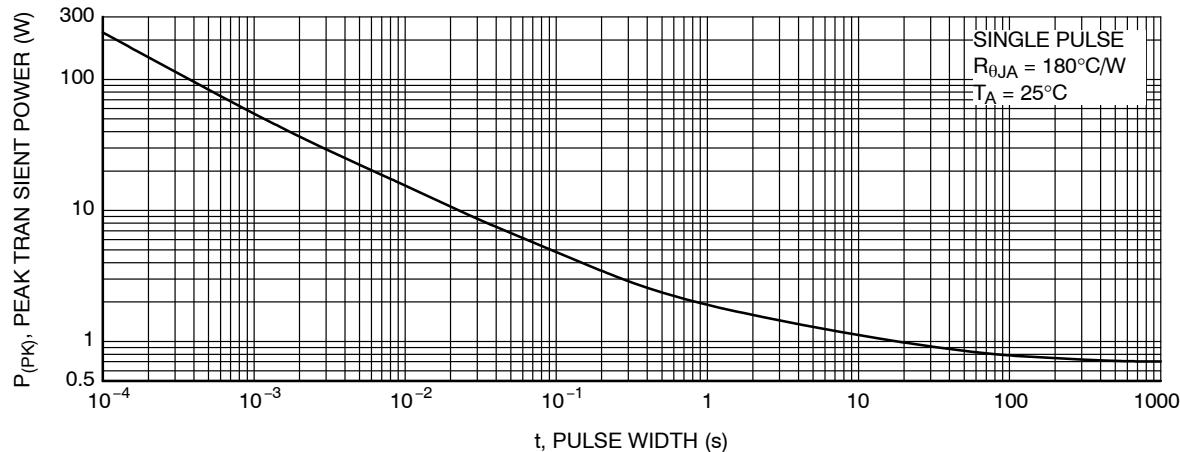


Figure 11. Single Pulse Maximum Power Dissipation

TYPICAL CHARACTERISTICS

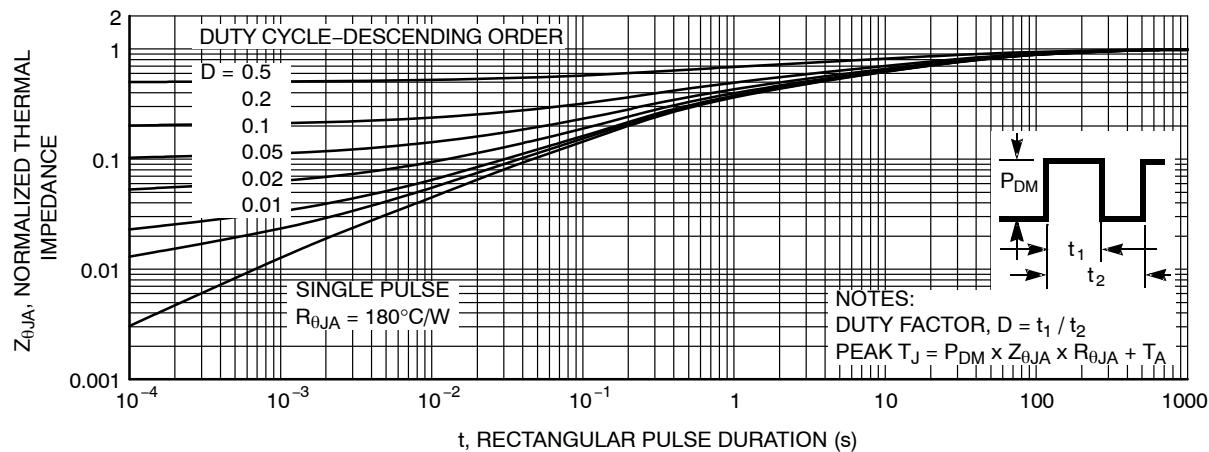
(T_J = 25°C unless otherwise noted) (continued)

Figure 12. Junction-to-Ambient Transient Thermal Response Curve

PACKAGE MARKING AND ORDERING INFORMATION


Device	Device Marking	Package	Reel Size	Tape Width	Shipping [†]
FDN8601	8601	SOT-23/SUPERSOT-23, 3 LEAD, 1.4x2.9 (Pb-Free, Halide Free)	7"	8 mm	3000 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

POWERTRENCH is registered trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SUPERSOT is trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.


SOT-23/SUPERSOT™-23, 3 LEAD, 1.4x2.9
CASE 527AG
ISSUE A



DATE 09 DEC 2019

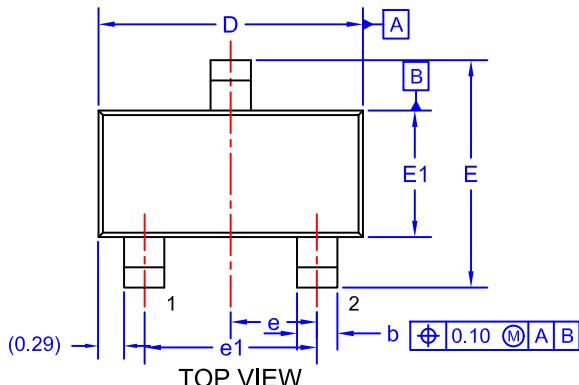


NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.

DIM	MIN.	NOM.	MAX.
A	0.85	0.95	1.12
A1	0.00	0.05	0.10
b	0.370	0.435	0.508
c	0.085	0.150	0.180
D	2.80	2.92	3.04
E	2.31	2.51	2.71
E1	1.20	1.40	1.52
e	0.95 BSC		
e1	1.90 BSC		
L	0.33	0.38	0.43

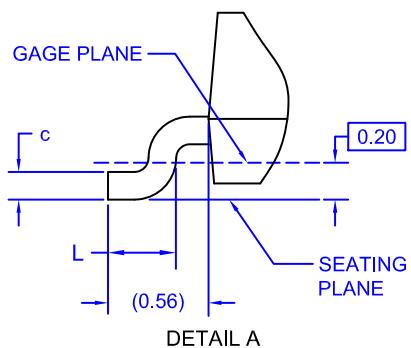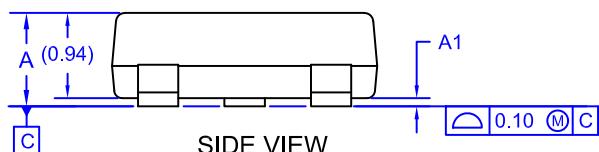


SEE DETAIL A

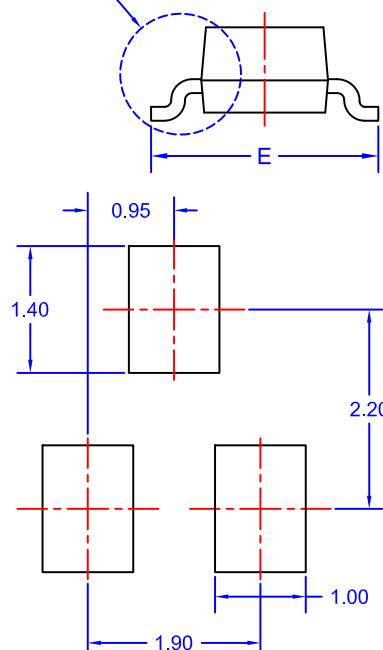

LAND PATTERN RECOMMENDATION*

*FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

**GENERIC
MARKING DIAGRAM***


XXX = Specific Device Code
M = Month Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON34319E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SOT-23/SUPERSOT-23, 3 LEAD, 1.4X2.9	PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **ONSEMI**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

