





























## Features

- Ultra slim design with 17.5mm(1SU) width
- Universal input 85~264VAC(277VAC operational)
- No load power consumption<0.3W</li>
- Isolation class  ${\mathbb I}$
- Pass LPS (Limited power source)
- DC output voltage adjustable
- · Protections : Short circuit / Overload / Over voltage
- Cooling by free air convection (working temperature:-30~+70°C)
- DIN rail TS-35/7.5 or 15 mountable
- Over voltage category III
- · LED indicator for power on
- · 3 years warranty

# Applications


- · Household control system
- Building automation
- · Industrial control system
- Factory automation
- Electro-mechanical apparatus

### Description

HDR-15 is one economical ultra slim 15W DIN rail power supply series, adapt to be installed on TS-35/7.5 or TS-35/15 mounting rails. The body is designed 17.5mm(1SU) in width, which allows space saving inside the cabinets. The entire series adopts the full range AC input from 85VAC to 264VAC (277VAC operational) and conforms to EN61000-3-2, the norm the European Union regulates for harmonic current.

HDR-15 is designed with plastic housing that it can effectively prevent user from electric hazards. With working efficiency up to 87%, the entire series can operate at the ambient temperature between -30°C and 70°C under air convection. The complete protection functions and relevant certificates for home automations and industrial control apparatus (IEC60950-1, UL508, UL60950-1, EN61558-2-16) make HDR-15 a very competitive power supply solution for household and industrial applications.

# Model Encoding





#### **SPECIFICATION**

MODEL		HDR-15-5	HDR-15-12	HDR-15-15	HDR-15-24	HDR-15-48	
	DC VOLTAGE	5V	12V	15V	24V	48V	
	RATED CURRENT	2.4A	1.25A	1A	0.63A	0.32A	
	CURRENT RANGE	0 ~ 2.4A	0 ~ 1.25A	0 ~ 1A	0 ~ 0.63A	0 ~ 0.32A	
	RATED POWER	12W	15W	15W	15.2W	15.4W	
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p	
OUTPUT	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	10.8 ~ 13.8V	13.5 ~ 18V	21.6 ~ 29V	43.2 ~ 55.2V	
	VOLTAGE TOLERANCE Note.3		±1.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	SETUP, RISE TIME	2000ms, 80ms/230VAC 2000ms, 80ms/115VAC at full load					
	HOLD UP TIME (Typ.)	30ms/230VAC 12ms/115VAC at full load					
	VOLTAGE RANGE	85 ~ 264VAC (277VAC operational ) 120 ~ 370VDC (390VDC operational )					
	FREQUENCY RANGE	47 ~ 63Hz					
NPUT			85%	QE E0/	060/	070/	
NPUI	EFFICIENCY (Typ.)	80%	1	85.5%	86%	87%	
	AC CURRENT (Typ.)	0.5A/115VAC					
	INRUSH CURRENT (Typ.)	COLD START 25A/115VAC 45A/230VAC					
	OVERLOAD	110 ~ 145% rated output power					
		Hiccup mode when output voltage <50%, recovers automatically after fault condition is removed					
PROTECTION		Constant current limiting	within 50% ~100°		e, recovers automatically af	ter fault condition is removed	
	OVER VOLTACE	5.75 ~ 6.75V	14.2 ~ 16.2V	18.8 ~ 22.5V	30 ~ 36V	56.5 ~ 64.8V	
	OVER VOLTAGE	Protection type : Shut of					
	WORKING TEMP.	-30 ~ +70°C (Refer to "D	erating Curve")				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing					
NVIRONMENT	TEMP. COEFFICIENT	$\pm 0.03\%$ °C (0 ~ 50 °C) RH non-condensing					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6					
	OPERATING ALTITUDE	2000 meters					
	OVER VOLTAGE CATEGORY	III ; According to EN61558, EN50178,EN60664-1, EN62477-1; altitude up to 2000 meters					
	SAFETY STANDARDS	UL60950-1, UL508, TUV EN61558-2-16, IEC60950-1, EAC TP TC 004, BSMI CNS14336-1 approved; Design refer to TUV EN60950-1					
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC					
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH					
SAFETY &		Parameter	Standard		Test Level / Note	e	
		Conducted	FN550320	CISPR32), CNS13438	Class B		
		Radiated	EN55032(CISPR32), CNS13438		Class B		
		Harmonic Current		EN61000-3-2		Class A	
		Voltage Flicker EN61000-3-3					
		EN55024, EN55035, EN61000-6-2, EN61204-3					
Note 4)		Parameter Standard Test Level /Note					
,		ESD		EN61000-4-2		Level 3, 8KV air; Level 2, 4KV contact, criteria	
		Radiated Susceptibility			Level 3, criteria	· · · · · · · · · · · · · · · · · · ·	
		EFT/Burest EN61000-4-4 Level 3, criteria A					
		Surge EN61000-4-5 Level 4,2KV/L-N, criteria A					
		Conducted					
		Conducted ENGTOUD-4-6 Level 3, Criteria A   Magnetic Field EN61000-4-8 Level 4, criteria A					
		Voltage Dips and interrup			>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods		
OTHERS	MTBF	1166K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	17.5*90*54.5mm (W*H*D)					
	PACKING	78g;160pcs/13.5Kg/1.19CUFT					
		y mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.					

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a  $0.1\mu f$  &  $47\mu f$  parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)
- 5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).





# ■ Block Diagram **RECTIFIERS RECTIFIERS** POWER EMII/P 0-& & **SWITCHING FILTER** -O **-V FILTER FILTER** DETECTION **CIRCUIT** CONTROL 0.L.P. 0.V.P. ■ Derating Curve ■ Output Derating VS Input Voltage 100 100 90 80 80 60 70 LOAD (%) (%) **GVO7** 50 40 40 20 70 (VERTICAL) 30 60 -30 100 115 120 140 160 180 200 220 240 264 277 (operational) AMBIENT TEMPERATURE (°C) INPUT VOLTAGE (VAC) 60Hz




## ■ Mechanical Specification

(Unit: mm, tolerance ± 0.5mm)



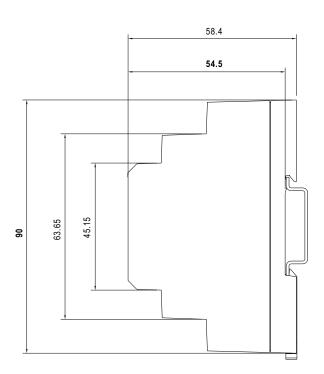



ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15

### Terminal Pin No. Assignment

Š .							
Pin No.	Assignment	Pin No.	Assignment				
1	+V	3	AC/N				
2	-V	4	AC/L				

### ■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html