

P-Channel Enhancement Mode Field Effect Transistor

NDS0610

General Description

This P-Channel Enhancement Mode Field Effect Transistors are Produced using **onsemi**'s proprietary, high cell density, DMOS technology. This very high density process has been designed to minimize on-state resistance, provide rugged and reliable performance and fast switching. They can be used, with a minimum of effort, in most applications requiring up to 120 mA DC and can deliver current up to 1 A.

This product is particularly suited to low voltage applications requiring a low current high side switch.

Features


- -0.12 A, -60 V
 - $R_{DS(on)} = 10 \Omega @ V_{GS} = -10 V$
 - $R_{DS(on)} = 20 \Omega @ V_{GS} = -4.5 V$
- Voltage Controlled P-Channel Small Signal Switch
- High Density Cell design for Low R_{DS(on)}
- High Saturation Current

ABSOLUTE MAXIMUM RATINGS $T_A = 25^{\circ}C$ unless otherwise noted


| Symbol | Parameter | Value | Unit |
|-----------------------------------|---|-------------|------|
| V _{DSS} | Drain-to-Source Voltage | -60 | V |
| V _{GSS} | Gate-to-Source Voltage | ±20 | V |
| I _D | Drain Current - Continuous (Note 1) - Pulsed | -0.12 -1 | Α |
| P _D | Maximum Power Dissipation 0.3 (Note 1) | | W |
| | Derate Above 25°C | 2.9 | |
| T _J , T _{stg} | Operating and Storage Junction Temperature Range | –55 to +150 | °C |
| T _L | Maximum Lead Temperature for Soldering Purposes, 1/16" from Case for 10 Seconds | 300 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.





MARKING DIAGRAM



610 = Device Code

M = Date Code*

Pb-Free Package

(NOTE: Microdot may be in either location)

*Date Code orientation and/or location may vary depending upon manufacturing location.

ORDERING INFORMATION

| Device | Package | Shipping [†] | | |
|---------|---------------------|-----------------------|--|--|
| NDS0610 | SOT-23 (Pb-Free) | 3000 / Tape & Reel | | |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, <u>BRD8011/D</u>.

NDS0610

THERMAL CHARACTERISTICS

| Symbol | Parameter | Value | Unit |
|-----------------|--|-------|------|
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient (Note 1) | 350 | °C/W |

ELECTRICAL CHARACTERISTICS $T_A = 25^{\circ}\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Тур | Max | Unit |
|--|---|---|------|-------------------|----------------|-------|
| Off Charac | eteristics | | | | | |
| BV _{DSS} | Drain to Source Breakdown Voltage | $V_{GS} = 0 \text{ V}, I_D = -10 \mu\text{A}$ | -60 | _ | - | V |
| $\frac{\Delta BV_{DSS}}{\Delta T_{J}}$ | Breakdown Voltage Temperature Coefficient | I_D = -10 μ A, Referenced to 25°C | - | -53 | - | mV/°C |
| I _{DSS} | Zero Gate Voltage Drain Current | $V_{DS} = -48 \text{ V}, V_{GS} = 0 \text{ V}$ | - | _ | -1 | μΑ |
| | | V _{DS} = -48 V, V _{GS} = 0 V T _J = 125°C | 1 | _ | -200 | μΑ |
| I _{GSS} | Gate-Body Leakage | $V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$ | _ | _ | ±10 | nA |
| On Charac | eteristics (Note 2) | | | | | |
| V _{GS(th)} | Gate Threshold Voltage | $V_{DS} = V_{GS}$, $I_D = -1$ mA | -1 | -1.7 | -3.5 | V |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate Threshold Voltage Temperature Coefficient | I _D = -1 mA, Referenced to 25°C | - | -3 | - | mV/°C |
| R _{DS(on)} | Static Drain-Source On-Resistance | $\begin{aligned} V_{GS} &= -10 \text{ V}, I_D = -0.5 \text{ A} \\ V_{GS} &= -4.5 \text{ V}, I_D = -0.25 \text{ A} \\ V_{GS} &= -10 \text{ V}, I_D = -0.5 \text{ A}, T_J = 125 ^{\circ}\text{C} \end{aligned}$ | - | 1.0 1.3 1.7 | 10 20 16 | Ω |
| I _{D(on)} | On-State Drain Current | V _{GS} = -10 V, V _{DS} = -10 V | -0.6 | _ | _ | Α |
| 9FS | Forward Transconductance | $V_{DS} = -10 \text{ V}, I_D = -0.1 \text{ A}$ | 70 | 430 | - | mS |
| Dynamic C | Characteristics | | | | | |
| C _{iss} | Input Capacitance | $V_{DS} = -25 \text{ V}, V_{GS} = 0 \text{ V}, f = 1.0 \text{ MHz}$ | - | 79 | - | pF |
| C _{oss} | Output Capacitance | | - | 10 | - | pF |
| C _{rss} | Reverse Transfer Capacitance | | - | 4 | - | pF |
| R_{G} | Gate Resistance | V _{DS} = -15 mV, f = 1.0 MHz | ı | 10 | - | Ω |
| Switching | Characteristics (Note 2) | | | | | |
| t _{d(on)} | Turn-On Delay Time | $V_{DD} = -25 \text{ V}, I_D = -0.12 \text{ A},$ | - | 2.5 | 5 | ns |
| t _r | Turn-On Rise Time | $V_{GS} = -10 \text{ V}, R_{GEN} = 6 \Omega$ | - | 6.3 | 12.6 | ns |
| t _{d(off)} | Turn-Off Delay Time | | - | 10 | 15 | ns |
| t _f | Turn-Off Fall Time | | - | 7.5 | 15 | ns |
| Qg | Total Gate Change | V _{DS} = -48 V, I _D = -0.5 A, V _{GS} = -10 V | _ | 1.8 | 2.5 | nC |
| Q_{gs} | Gate-Source Change | V _{GS} = -10 V | _ | 0.3 | - | nC |
| Q _{gd} | Gate-Drain Change |] | - | 0.4 | - | nC |
| Drain-Sou | rce Diode Characteristics and Maximum R | atings | | | | |
| Is | Maximum Continuous Drain-Source Diode | Forward Current | _ | _ | -0.24 | Α |
| V _{SD} | Drain-Source Diode Forward Voltage | V _{GS} = 0 V, I _S = -0.24 A (Note 2) | - | -0.8 | -1.5 | V |
| t _{rr} | Diode Reverse Recovery Time | $I_F = -0.5 \text{ A}, d_{iF}/d_t = 100 \text{ A/}\mu\text{s} \text{ (Note 2)}$ | - | 17 | - | ns |
| Q_{rr} | Diode Reverse Recovery Charge | 1 | _ | 15 | _ | nC |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOTES:

1. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



a) 350 $^{\circ}$ C/W when mounted on a minimum pad.

Scale 1: 1 on letter size paper

2. Pulse Test: Pulse Width \leq 300 μ s, Duty Cycle \leq 2.0%

NDS0610

TYPICAL CHARACTERISTICS

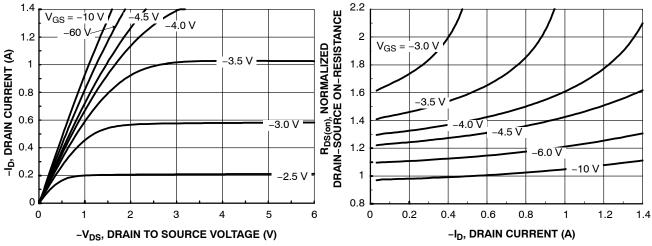


Figure 1. On-Region Characteristics

Figure 2. On-Resistance Variation With Drain Current and Gate Voltage

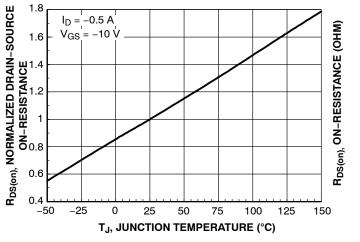


Figure 3. On–Resistance Variation with Temperature

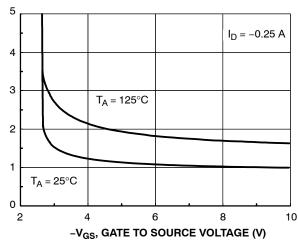


Figure 4. On–Resistance Variation with Gate–to–Source Voltage

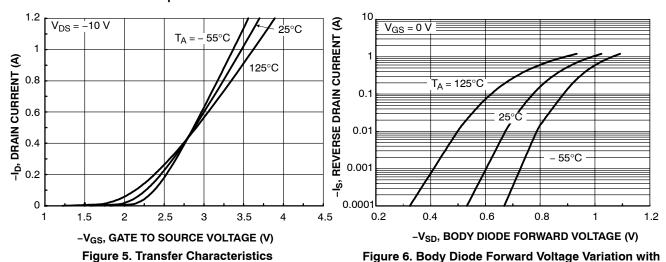


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature

NDS0610

TYPICAL CHARACTERISTICS (CONTINUED)

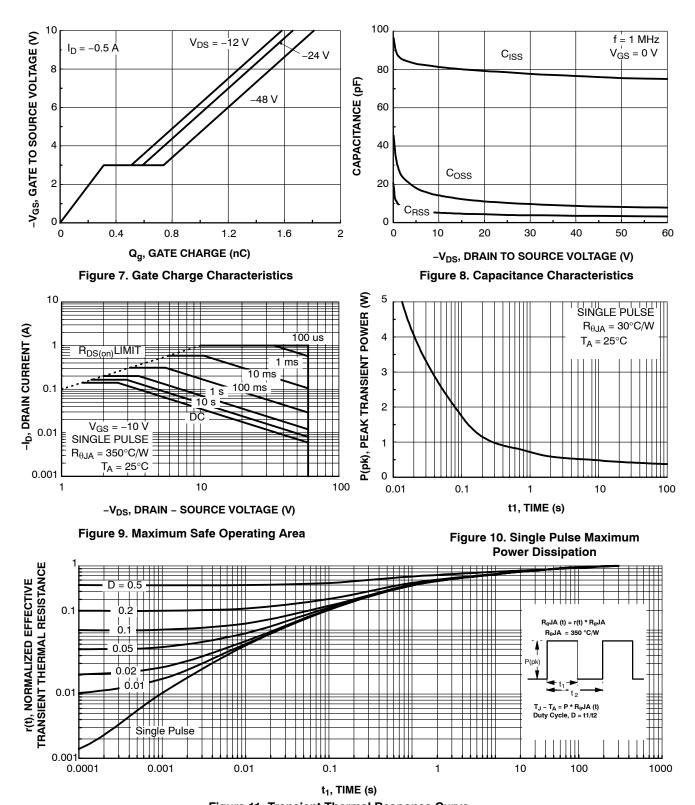


Figure 11. Transient Thermal Response Curve

Thermal characterization performed using the conditions described in Note 1a. Transient themal response will change depending on the circuit board design.








SOT-23 (TO-236) 2.90x1.30x1.00 1.90P **CASE 318 ISSUE AU**


DATE 14 AUG 2024


MAX














MILLIMETERS

MIN

NOM

NOTES:

DIM

- DIMENSIONING AND TOLERANCING 1. PER ASME Y14.5M, 2018. CONTROLLING DIMENSIONS:
- MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE
- BASE MATERIAL.
 DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

GENERIC MARKING DIAGRAM*



XXX = Specific Device Code

= Date Code

= Pb-Free Package

RECOMMENDED MOUNTING FOOTPRINT

* For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLES ON PAGE 2

| DOCUMENT NUMBER: | 98ASB42226B | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|--------------------------------------|---|-------------|--|
| DESCRIPTION: | SOT-23 (TO-236) 2.90x1.30x1.00 1.90P | | PAGE 1 OF 2 | |

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

^{*}This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

SOT-23 (TO-236) 2.90x1.30x1.00 1.90P CASE 318 ISSUE AU

DATE 14 AUG 2024

| STYLE 1 THRU 5: CANCELLED | STYLE 6: PIN 1. BASE 2. EMITTER 3. COLLECTOR | | NODE D CONNECTION ATHODE | |
|---|---|--|---|---|
| STYLE 9: PIN 1. ANODE 2. ANODE 3. CATHODE | STYLE 10: PIN 1. DRAIN 2. SOURCE 3. GATE | STYLE 11: STYLE 12: PIN 1. ANODE PIN 1. CA 2. CATHODE 2. CA 3. CATHODE-ANODE 3. AN | ATHODE PIN 1. SOURCE ATHODE 2. DRAIN | STYLE 14: PIN 1. CATHODE 2. GATE 3. ANODE |
| STYLE 15: PIN 1. GATE 2. CATHODE 3. ANODE | STYLE 16: PIN 1. ANODE 2. CATHODE 3. CATHODE | | | STYLE 20: PIN 1. CATHODE 2. ANODE 3. GATE |
| STYLE 21: PIN 1. GATE 2. SOURCE 3. DRAIN | STYLE 22: PIN 1. RETURN 2. OUTPUT 3. INPUT | STYLE 23: STYLE 24: PIN 1. ANODE PIN 1. GAT 2. ANODE 2. DR/ 3. CATHODE 3. SOU | TE PIN 1. ANODE AIN 2. CATHODE | STYLE 26: PIN 1. CATHODE 2. ANODE 3. NO CONNECTION |
| STYLE 27: PIN 1. CATHODE 2. CATHODE 3. CATHODE | STYLE 28: PIN 1. ANODE 2. ANODE 3. ANODE | | | |

| DOCUMENT NUMBER: | 98ASB42226B Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|--|--|-------------|
| DESCRIPTION: | SOT-23 (TO-236) 2.90x1.30x1.00 1.90P | | PAGE 2 OF 2 |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales