



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## MM74HC123A Dual Retriggerable Monostable Multivibrator

### General Description

The MM74HC123A high speed monostable multivibrators (one shots) utilize advanced silicon-gate CMOS technology. They feature speeds comparable to low power Schottky TTL circuitry while retaining the low power and high noise immunity characteristic of CMOS circuits.

Each multivibrator features both a negative, A, and a positive, B, transition triggered input, either of which can be used as an inhibit input. Also included is a clear input that when taken low resets the one shot. The MM74HC123A can be triggered on the positive transition of the clear while A is held LOW and B is held HIGH.

The MM74HC123A is retriggerable. That is it may be triggered repeatedly while their outputs are generating a pulse and the pulse will be extended.

Pulse width stability over a wide range of temperature and supply is achieved using linear CMOS techniques. The output pulse equation is simply:  $PW = (R_{EXT}) (C_{EXT})$ ; where PW is in seconds, R is in ohms, and C is in farads. All inputs are protected from damage due to static discharge by diodes to  $V_{CC}$  and ground.

### Features


- Typical propagation delay: 25 ns
- Wide power supply range: 2V–6V
- Low quiescent current: 80  $\mu$ A maximum (74HC Series)
- Low input current: 1  $\mu$ A maximum
- Fanout of 10 LS-TTL loads
- Simple pulse width formula  $T = RC$
- Wide pulse range: 400 ns to  $\infty$  (typ)
- Part to part variation:  $\pm 5\%$  (typ)
- Schmitt Trigger A & B inputs allow rise and fall times to be as slow as one second

### Ordering Code:


| Order Number  | Package Number | Package Description                                                          |
|---------------|----------------|------------------------------------------------------------------------------|
| MM74HC123AM   | M16A           | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow |
| MM74HC123ASJ  | M16D           | 16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                |
| MM74HC123AMTC | MTC16          | 16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  |
| MM74HC123AN   | N16E           | 16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide       |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

### Connection Diagram

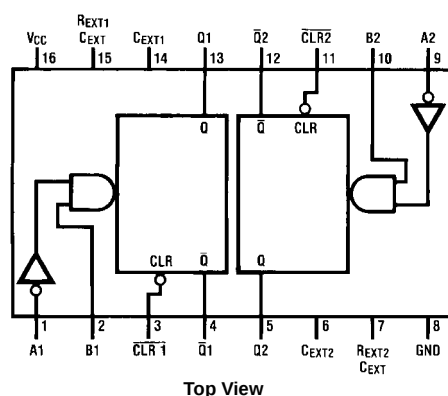

### Timing Component




Note: Pin 6 and Pin 14 must be hard-wired to GND.

## Truth Table

| Inputs     |              |            | Outputs                    |                            |
|------------|--------------|------------|----------------------------|----------------------------|
| Clear      | A            | B          | Q                          | $\bar{Q}$                  |
| L          | X            | X          | L                          | H                          |
| X          | H            | X          | L                          | H                          |
| X          | X            | L          | L                          | H                          |
| H          | L            | $\uparrow$ | $\text{—}\text{H}\text{—}$ | $\text{—}\text{L}\text{—}$ |
| H          | $\downarrow$ | H          | $\text{—}\text{L}\text{—}$ | $\text{—}\text{H}\text{—}$ |
| $\uparrow$ | L            | H          | $\text{—}\text{H}\text{—}$ | $\text{—}\text{L}\text{—}$ |

H = HIGH Level  
 L = LOW Level  
 $\uparrow$  = Transition from LOW-to-HIGH  
 $\downarrow$  = Transition from HIGH-to-LOW  
 $\text{—}\text{H}\text{—}$  = One HIGH Level Pulse  
 $\text{—}\text{L}\text{—}$  = One LOW Level Pulse  
 X = Irrelevant

## Logic Diagram

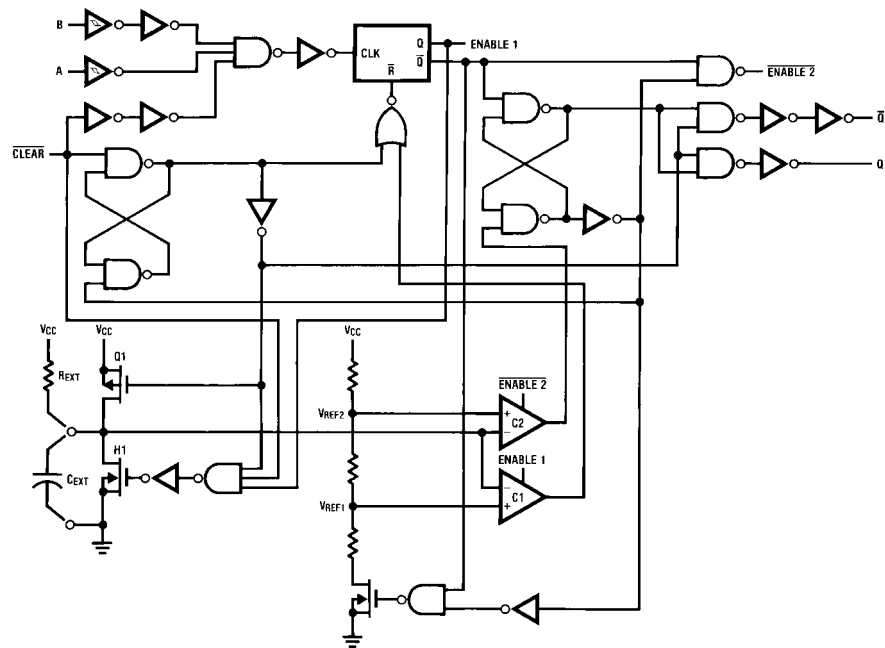

**Absolute Maximum Ratings**(Note 1)

(Note 2)

|                                                  |                          |
|--------------------------------------------------|--------------------------|
| Supply Voltage ( $V_{CC}$ )                      | -0.5V to +7.0V           |
| DC Input Voltage ( $V_{IN}$ )                    | -1.5V to $V_{CC} + 1.5V$ |
| DC Output Voltage ( $V_{OUT}$ )                  | -0.5V to $V_{CC} + 0.5V$ |
| Clamp Diode Current ( $I_{IK}, I_{OK}$ )         | $\pm 20$ mA              |
| DC Output Current, per pin ( $I_{OUT}$ )         | $\pm 25$ mA              |
| DC $V_{CC}$ or GND Current, per pin ( $I_{CC}$ ) | $\pm 50$ mA              |
| Storage Temperature Range ( $T_{STG}$ )          | -65°C to +150°C          |
| Power Dissipation ( $P_D$ )                      |                          |
| (Note 3)                                         | 600 mW                   |
| S.O. Package only                                | 500 mW                   |
| Lead Temperature ( $T_L$ )                       |                          |
| (Soldering 10 seconds)                           | 260°C                    |

**Recommended Operating Conditions**

|                                                     | Min | Max      | Units |
|-----------------------------------------------------|-----|----------|-------|
| Supply Voltage ( $V_{CC}$ )                         | 2   | 6        | V     |
| DC Input or Output Voltage<br>( $V_{IN}, V_{OUT}$ ) | 0   | $V_{CC}$ | V     |
| Operating Temperature Range ( $T_A$ )               | -40 | +85      | °C    |
| Input Rise or Fall Times<br>(Clear Input)           |     |          |       |
| ( $t_r, t_f$ ) $V_{CC} = 2.0V$                      |     | 1000     | ns    |
| $V_{CC} = 4.5V$                                     |     | 500      | ns    |
| $V_{CC} = 6.0V$                                     |     | 400      | ns    |

**Note 1:** Maximum Ratings are those values beyond which damage to the device may occur.

**Note 2:** Unless otherwise specified all voltages are referenced to ground.

**Note 3:** Power Dissipation Temperature Derating: Plastic "N" Package: -12mW/°C from 65°C to 85°C

**DC Electrical Characteristics** (Note 4)

| Symbol          | Parameter                                      | Conditions                                                                                                           | V <sub>CC</sub> | T <sub>A</sub> = 25°C |                   | T <sub>A</sub> = −40 to 85°C | T <sub>A</sub> = −55 to 125°C | Units |
|-----------------|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------|-------------------|------------------------------|-------------------------------|-------|
|                 |                                                |                                                                                                                      |                 | Typ                   | Guaranteed Limits |                              |                               |       |
| V <sub>IH</sub> | Minimum HIGH Level Input Voltage               |                                                                                                                      | 2.0V            |                       | 1.5               | 1.5                          | 1.5                           | V     |
|                 |                                                |                                                                                                                      | 4.5V            |                       | 3.15              | 3.15                         | 3.15                          | V     |
|                 |                                                |                                                                                                                      | 6.0V            |                       | 4.2               | 4.2                          | 4.2                           | V     |
| V <sub>IL</sub> | Maximum LOW Level Input Voltage                |                                                                                                                      | 2.0V            |                       | 0.3               | 0.3                          | 0.3                           | V     |
|                 |                                                |                                                                                                                      | 4.5V            |                       | 0.9               | 0.9                          | 0.9                           | V     |
|                 |                                                |                                                                                                                      | 6.0V            |                       | 1.2               | 1.2                          | 1.2                           | V     |
| V <sub>OH</sub> | Minimum HIGH Level Output Voltage              | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br> I <sub>OUT</sub>   ≤ 20 μA                                  | 2.0V            | 2.0                   | 1.9               | 1.9                          | 1.9                           | V     |
|                 |                                                |                                                                                                                      | 4.5V            | 4.5                   | 4.4               | 4.4                          | 4.4                           | mV    |
|                 |                                                |                                                                                                                      | 6.0V            | 6.0                   | 5.9               | 5.9                          | 5.9                           | V     |
|                 |                                                | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br> I <sub>OUT</sub>   ≤ 4.0 mA<br> I <sub>OUT</sub>   ≤ 5.2 mA | 4.5V            | 4.2                   | 3.98              | 3.84                         | 3.7                           | V     |
|                 |                                                |                                                                                                                      | 6.0V            | 5.7                   | 5.48              | 5.34                         | 5.2                           | V     |
|                 |                                                |                                                                                                                      |                 |                       |                   |                              |                               |       |
| V <sub>OL</sub> | Maximum LOW Level Output Voltage               | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br> I <sub>OUT</sub>   ≤ 20 μA                                  | 2.0V            | 0                     | 0.1               | 0.1                          | 0.1                           | V     |
|                 |                                                |                                                                                                                      | 4.5V            | 0                     | 0.1               | 0.1                          | 0.1                           | V     |
|                 |                                                |                                                                                                                      | 6.0V            | 0                     | 0.1               | 0.1                          | 0.1                           | V     |
|                 |                                                | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br> I <sub>OUT</sub>   ≤ 4 mA<br> I <sub>OUT</sub>   ≤ 5.2 mA   | 4.5V            | 0.2                   | 0.26              | 0.33                         | 0.4                           | V     |
|                 |                                                |                                                                                                                      | 6.0V            | 0.2                   | 0.26              | 0.33                         | 0.4                           | V     |
|                 |                                                |                                                                                                                      |                 |                       |                   |                              |                               | V     |
| I <sub>IN</sub> | Maximum Input Current (Pins 7, 15)             | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                                             | 6.0V            |                       | ±0.5              | ±5.0                         | ±5.0                          | μA    |
| I <sub>IN</sub> | Maximum Input Current (all other pins)         | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                                             | 6.0V            |                       | ±0.1              | ±1.0                         | ±1.0                          | μA    |
| I <sub>CC</sub> | Maximum Quiescent Supply Current (standby)     | V <sub>IN</sub> = V <sub>CC</sub> or GND<br>I <sub>OUT</sub> = 0 μA                                                  | 6.0V            |                       | 8.0               | 80                           | 160                           | μA    |
| I <sub>CC</sub> | Maximum Active Supply Current (per monostable) | V <sub>IN</sub> = V <sub>CC</sub> or GND<br>R/C <sub>EXT</sub> = 0.5V <sub>CC</sub>                                  | 2.0V            | 36                    | 80                | 110                          | 130                           | μA    |
|                 |                                                |                                                                                                                      | 4.5V            | 0.33                  | 1.0               | 1.3                          | 1.6                           | mA    |
|                 |                                                |                                                                                                                      | 6.0V            | 0.7                   | 2.0               | 2.6                          | 3.2                           | mA    |

**Note 4:** For a power supply of  $5V \pm 10\%$  the worst-case output voltages ( $V_{OH}, V_{OL}$ ) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst-case  $V_{IH}$  and  $V_{IL}$  occur at  $V_{CC} = 5.5V$  and 4.5V respectively. (The  $V_{IH}$  value at 5.5V is 3.85V.) The worst-case leakage current ( $I_{IN}, I_{CC}$ , and  $I_{OZ}$ ) occur for CMOS at the higher voltage and so the 6.0V values should be used.

**AC Electrical Characteristics** $V_{CC} = 5V$ ,  $T_A = 25^\circ C$ ,  $C_L = 15\text{ pF}$ ,  $t_r = t_f = 6\text{ ns}$ 

| Symbol        | Parameter                                                       | Conditions                                                  | Typ | Limit | Units   |
|---------------|-----------------------------------------------------------------|-------------------------------------------------------------|-----|-------|---------|
| $t_{PLH}$     | Maximum Trigger Propagation Delay<br>A, B or Clear to Q         |                                                             | 22  | 33    | ns      |
| $t_{PHL}$     | Maximum Trigger Propagation Delay<br>A, B or Clear to $\bar{Q}$ |                                                             | 25  | 42    | ns      |
| $t_{PHL}$     | Maximum Propagation Delay, Clear to Q                           |                                                             | 20  | 27    | ns      |
| $t_{PLH}$     | Maximum Propagation Delay, Clear to $\bar{Q}$                   |                                                             | 22  | 33    | ns      |
| $t_W$         | Minimum Pulse Width, A, B or Clear                              |                                                             | 14  | 26    | ns      |
| $t_{REM}$     | Minimum Clear Removal Time                                      |                                                             |     | 0     | ns      |
| $t_{WQ(MIN)}$ | Minimum Output Pulse Width                                      | $C_{EXT} = 28\text{ pF}$<br>$R_{EXT} = 2\text{ k}\Omega$    | 400 |       | ns      |
| $t_{WQ}$      | Output Pulse Width                                              | $C_{EXT} = 1000\text{ pF}$<br>$R_{EXT} = 10\text{ k}\Omega$ | 10  |       | $\mu s$ |

**AC Electrical Characteristics** $C_L = 50\text{ pF}$ ,  $t_r = t_f = 6\text{ ns}$  (unless otherwise specified)

| Symbol                              | Parameter                                                          | Conditions                                                                                            | V <sub>CC</sub> | T <sub>A</sub> = 25°C |                   | T <sub>A</sub> = −40 to 85°C | T <sub>A</sub> = −55 to 125°C | Units |    |
|-------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------|-----------------------|-------------------|------------------------------|-------------------------------|-------|----|
|                                     |                                                                    |                                                                                                       |                 | Typ                   | Guaranteed Limits |                              |                               |       |    |
| t <sub>PLH</sub>                    | Maximum Trigger Propagation Delay, A, B or Clear to Q              |                                                                                                       | 2.0V            | 77                    | 169               | 194                          | 210                           | ns    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            | 26                    | 42                | 51                           | 57                            | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            | 21                    | 32                | 39                           | 44                            | ns    |    |
| t <sub>PHL</sub>                    | Maximum Trigger Propagation Delay, A, B or Clear to $\overline{Q}$ |                                                                                                       | 2.0V            | 88                    | 197               | 229                          | 250                           | ns    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            | 29                    | 48                | 60                           | 67                            | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            | 24                    | 38                | 46                           | 51                            | ns    |    |
| t <sub>PHL</sub>                    | Maximum Propagation Delay Clear to Q                               |                                                                                                       | 2.0V            | 54                    | 114               | 132                          | 143                           | ns    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            | 23                    | 34                | 41                           | 45                            | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            | 19                    | 28                | 33                           | 36                            | ns    |    |
| t <sub>PLH</sub>                    | Maximum Propagation Delay Clear to $\overline{Q}$                  |                                                                                                       | 2.0V            | 56                    | 116               | 135                          | 147                           | ns    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            | 25                    | 36                | 42                           | 46                            | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            | 20                    | 29                | 34                           | 37                            | ns    |    |
| t <sub>W</sub>                      | Minimum Pulse Width<br>A, B, Clear                                 |                                                                                                       | 2.0V            | 57                    | 123               | 144                          | 157                           | ns    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            | 17                    | 30                | 37                           | 42                            | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            | 12                    | 21                | 27                           | 30                            | ns    |    |
| t <sub>REM</sub>                    | Minimum Clear Removal Time                                         |                                                                                                       | 2.0V            |                       | 0                 | 0                            | 0                             | ns    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            |                       | 0                 | 0                            | 0                             | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            |                       | 0                 | 0                            | 0                             | ns    |    |
| t <sub>TLH</sub> , t <sub>THL</sub> | Maximum Output Rise and Fall Time                                  |                                                                                                       | 2.0V            | 30                    | 75                | 95                           | 110                           | ns    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            | 8                     | 15                | 19                           | 22                            | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            | 7                     | 13                | 16                           | 19                            | ns    |    |
| t <sub>WQ(MIN)</sub>                | Minimum Output Pulse Width                                         | C <sub>EXT</sub> = 28 pF<br>R <sub>EXT</sub> = 2 kΩ<br>R <sub>EXT</sub> = 6 kΩ (V <sub>CC</sub> = 2V) | 2.0V            | 1.5                   |                   |                              |                               | μs    |    |
|                                     |                                                                    |                                                                                                       | 4.5V            | 450                   |                   |                              |                               | ns    |    |
|                                     |                                                                    |                                                                                                       | 6.0V            | 380                   |                   |                              |                               | ns    |    |
| t <sub>WQ</sub>                     | Output Pulse Width                                                 | C <sub>EXT</sub> = 0.1 μF<br>R <sub>EXT</sub> = 10 kΩ                                                 | Min             | 5.0V                  | 1                 | 0.9                          | 0.86                          | 0.85  | ms |
|                                     |                                                                    |                                                                                                       | Max             | 5.0V                  | 1                 | 1.1                          | 1.14                          | 1.15  | ms |
| C <sub>IN</sub>                     | Maximum Input Capacitance (Pins 7 & 15)                            |                                                                                                       |                 | 12                    | 20                | 20                           | 20                            | pF    |    |
| C <sub>IN</sub>                     | Maximum Input Capacitance (other inputs)                           |                                                                                                       |                 | 6                     | 10                | 10                           | 10                            | pF    |    |
| C <sub>PD</sub>                     | Power Dissipation Capacitance                                      | (Note 5)                                                                                              |                 | 70                    |                   |                              |                               | pF    |    |

**Note 5:**  $C_{PD}$  determines the no load dynamic power consumption,  $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$ , and the no load dynamic current consumption,  $I_S = C_{PD} V_{CC} f + I_{CC}$ .

## Theory of Operation

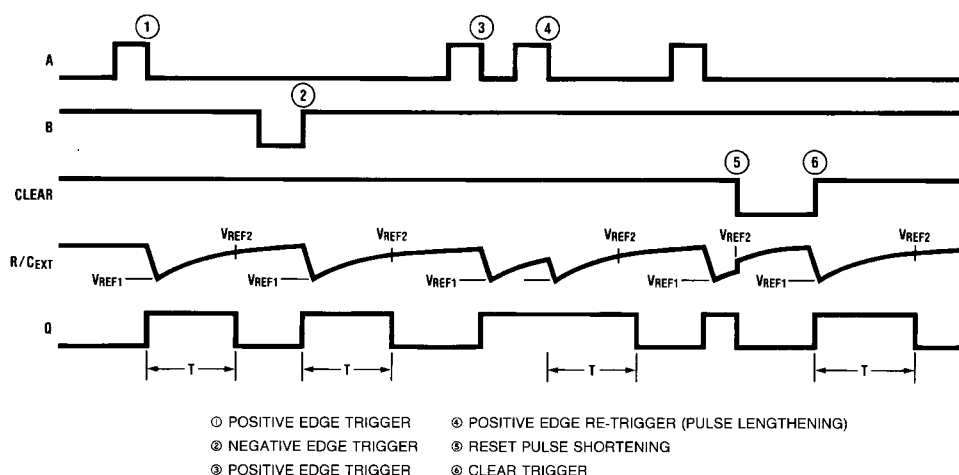


FIGURE 1.

### Trigger Operation

As shown in Figure 1 and the logic diagram, before an input trigger occurs, the one shot is in the quiescent state with the Q output LOW, and the timing capacitor  $C_{EXT}$  completely charged to  $V_{CC}$ . When the trigger input A goes from  $V_{CC}$  to GND (while inputs B and clear are held to  $V_{CC}$ ) a valid trigger is recognized, which turns on comparator C1 and transistor N1. At the same time the output latch is set. With transistor N1 on, the capacitor  $C_{EXT}$  rapidly discharges toward GND until  $V_{REF1}$  is reached. At this point the output of comparator C1 changes state and transistor N1 turns off. Comparator C2 turns on while at the same time comparator C1 turns off. With transistor N1 off, the capacitor  $C_{EXT}$  begins to charge through the timing resistor,  $R_{EXT}$ , toward  $V_{CC}$ . When the voltage across  $C_{EXT}$  equals  $V_{REF2}$ , comparator C2 changes state causing the output latch to reset (Q goes LOW) while at the same time disabling comparator C2. This ends the timing cycle with the monostable in the quiescent state, waiting for the next trigger.

A valid trigger is also recognized when trigger input B goes from GND to  $V_{CC}$  (while input A is at GND and input clear is at  $V_{CC}$ ). The MM74HC123A can also be triggered when clear goes from GND to  $V_{CC}$  (while A is at GND and B is at  $V_{CC}$ ).

It should be noted that in the quiescent state  $C_{EXT}$  is fully charged to  $V_{CC}$  causing the current through resistor  $R_{EXT}$  to be zero. Both comparators are "off" with the total device current due only to reverse junction leakages. An added feature of the MM74HC123A is that the output latch is set via the input trigger without regard to the capacitor voltage. Thus, propagation delay from trigger to Q is independent of the value of  $C_{EXT}$ ,  $R_{EXT}$ , or the duty cycle of the input waveform.

### Retrigger Operation

The MM74HC123A is retriggered if a valid trigger occurs 3 followed by another trigger 4 before the Q output has returned to the quiescent (zero) state. Any retrigger, after the timing node voltage at the R/C<sub>EXT</sub> pin has begun to rise from  $V_{REF1}$ , but has not yet reached  $V_{REF2}$ , will cause an increase in output pulse width T. When a valid retrigger is initiated 4, the voltage at the R/C<sub>EXT</sub> pin will again drop to  $V_{REF1}$  before progressing along the RC charging curve toward  $V_{CC}$ . The Q output will remain HIGH until time T, after the last valid retrigger.

Because the trigger-control circuit flip-flop resets shortly after  $C_X$  has discharged to the reference voltage of the lower reference circuit, the minimum retrigger time,  $t_{rr}$  is a function of internal propagation delays and the discharge time of  $C_X$ :

$$t_{rr} \approx 20 + \frac{187}{V_{CC} - 0.7} + \frac{565 + (0.256 V_{CC}) C_X}{[V_{CC} - 0.7]^2}$$

Another removal/retrigger time occurs when a short clear pulse is used. Upon receipt of a clear, the one shot must charge the capacitor up to the upper trip point before the one shot is ready to receive the next trigger. This time is dependent on the capacitor used and is approximately:

$$t_{rr} = 196 + \frac{640}{V_{CC} - 0.7} + \frac{522 + (0.3 V_{CC}) C_X}{(V_{CC} - 0.7)^2} \text{ ns}$$


## Theory of Operation (Continued)

### Reset Operation


These one shots may be reset during the generation of the output pulse. In the reset mode of operation, an input pulse on clear sets the reset latch and causes the capacitor to be fast charged to  $V_{CC}$  by turning on transistor Q1 5. When the voltage on the capacitor reaches  $V_{REF2}$ , the reset latch will clear and then be ready to accept another pulse. If the

clear input is held low, any trigger inputs that occur will be inhibited and the Q and  $\bar{Q}$  outputs of the output latch will not change. Since the Q output is reset when an input low level is detected on the Clear input, the output pulse T can be made significantly shorter than the minimum pulse width specification.


Typical Output Pulse Width vs. Timing Components




Typical 1ms Pulse Width Variation vs. Supply




Typical Distribution of Output Pulse Width, Part to Part



Minimum  $R_{EXT}$  vs. Supply Voltage




Typical 1ms Pulse Width Variation vs. Temperature





**Note:** R and C are not subjected to temperature. The C is polypropylene.

**Physical Dimensions** inches (millimeters) unless otherwise noted

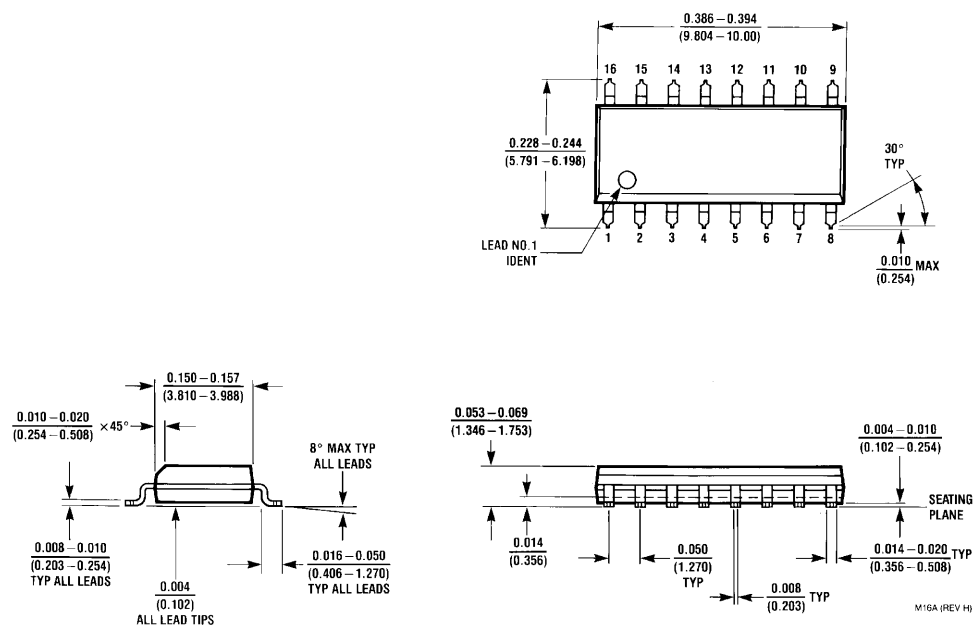


**16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow  
Package Number M16A**


# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

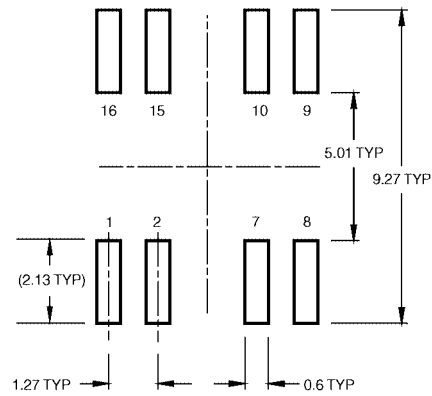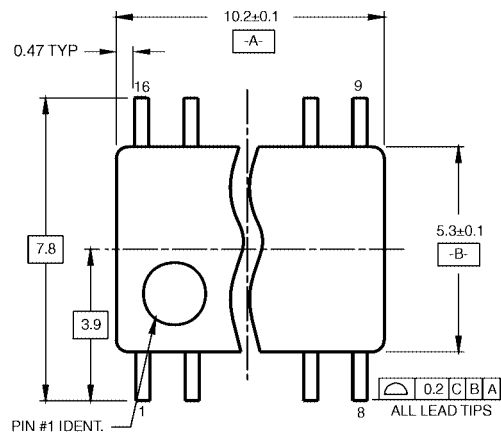

LAND PATTERN RECOMMENDATION

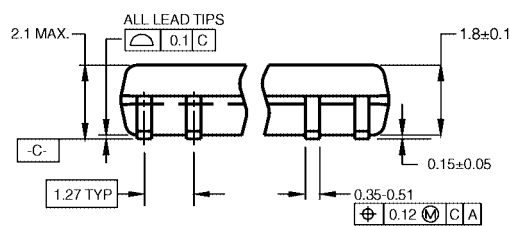


DIMENSIONS ARE IN MILLIMETERS

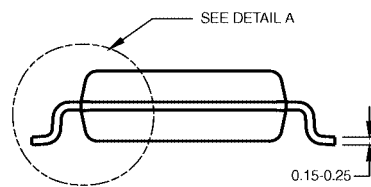

## NOTES:


- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

M16DRevB1

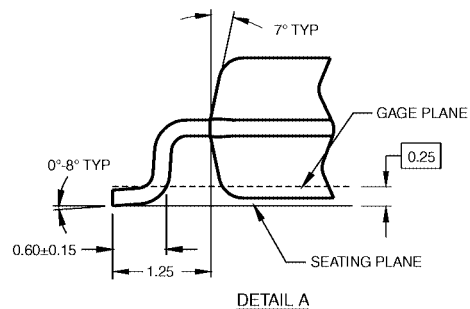


DETAIL A

**16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M16D**

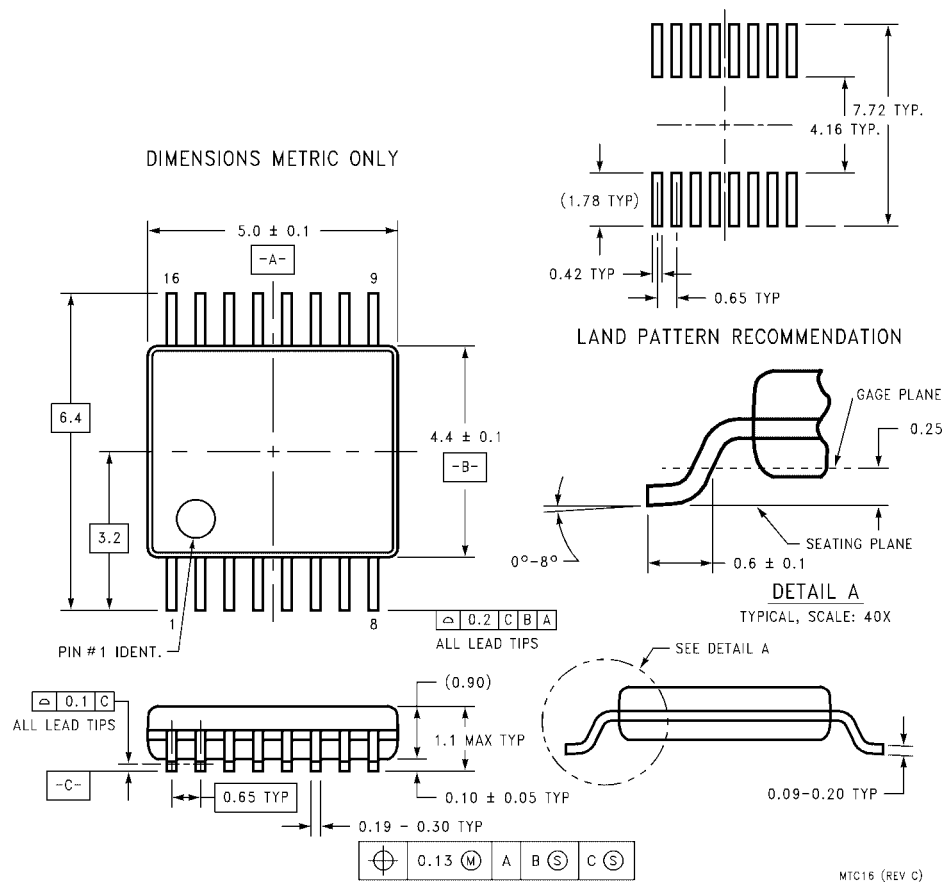**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)


**16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC16**

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

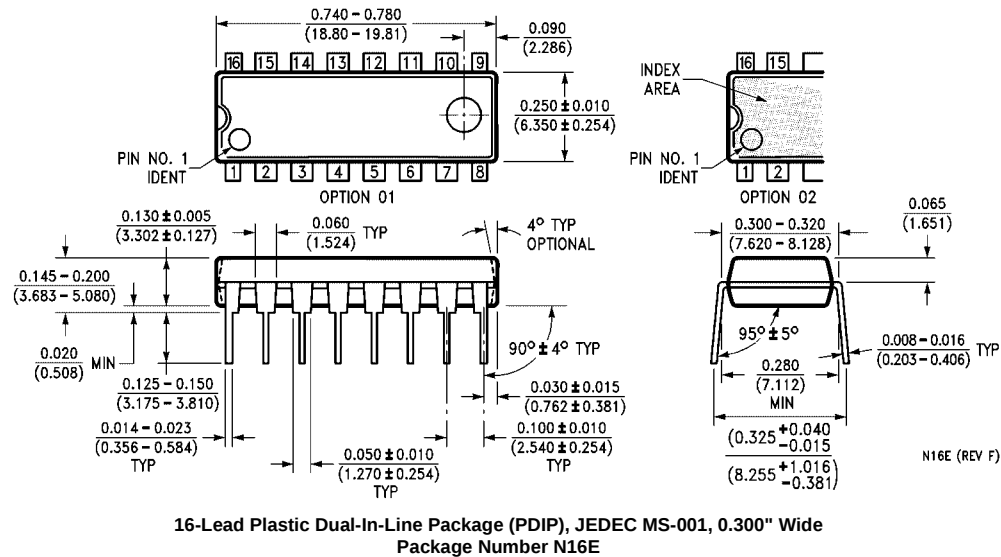

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative