Low-Voltage Single SPDT Analog Switch

DESCRIPTION

The DG2001 is a single-pole/double-throw monolithic CMOS analog switch designed for high performance switching of analog signals. Combining low power, high speed, low on-resistance and small physical size, the DG2001 is ideal for portable and battery powered applications requiring high performance and efficient use of board space.

The DG2001 is built on Vishay Siliconix's low voltage JI2 process. The DG2001 has a minimum 2000 V, ESD protection, per Method 3015.7. An epitaxial layer prevents latchup. Break-before-make is guaranteed.

The switch conducts equally well in both directions when on, and blocks up to the power supply level when off.

FEATURES

- **Halogen-free according to IEC 61249-2-21 Definition**
- Low Voltage Operation (1.8 V to 5.5 V)
- Low On-Resistance - R_{ON}: 3 Ω
- Fast Switching - t_{ON}: 20 ns, t_{OFF}: 10 ns
- Low Leakage - I_{COM}: 0.2 nA
- Low Charge Injection - Q_{INJ}: 5 pC
- Low Power Consumption
- TTL/CMOS Compatible
- ESD Protection > 2000 V (Method 3015.7)
- TSOP-6 Package
- **Compliant to RoHS Directive 2002/95/EC**

Pb-free
RoHS COMPLIANT
HALOGEN FREE


BENEFITS

- Reduced Power Consumption
- Simple Logic Interface
- High Accuracy
- Reduce Board Space

APPLICATIONS

- Cellular Phones
- Communication Systems
- Portable Test Equipment
- Battery Operated Systems
- Sample and Hold Circuits

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

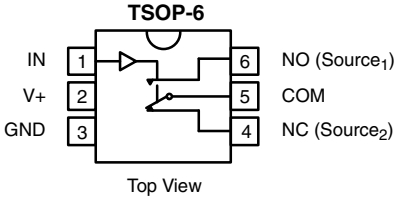

TRUTH TABLE

Logic	NC	NO
0	ON	OFF
1	OFF	ON

ORDERING INFORMATION

Temp Range	Package	Part Number
- 40 °C to 85 °C	TSOP-6	DG2001DV-T1
		DG2001DV-T1-E3

This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C, unless otherwise noted)				
Parameter		**Symbol**	**Limit**	**Unit**
Referenced V+ to GND			- 0.3 to + 6	V
IN, COM, NC, NO[a]			- 0.3 to (V+ + 0.3)	
Continuous Current (Any Terminal)			± 50	mA
Peak Current (Pulsed at 1 ms, 10 % duty cycle)			± 200	
ESD (MIL-STD-883B, Method 3015.7)			> 2000	V
Storage Temperature (D Suffix)			- 65 to 125	°C
Power Dissipation (Packages)[b]	TSOP-6[c]		570	mW

Notes:
a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
b. All leads welded or soldered to PC Board.
c. Derate 7 mW/°C above 25 °C.

SPECIFICATIONS (V+ = 2 V)							
		Test Conditions Unless Otherwise Specified V+ = 2 V, ± 10 % V_{IN} = 0.4 V or 1.6 V[e]		**Limits** - 40 °C to 85 °C			
Parameter	**Symbol**		**Temp.[a]**	**Min.[b]**	**Typ.[c]**	**Max.[b]**	**Unit**
Analog Switch							
Analog Signal Range[d]	V_{NO}, V_{NC} V_{COM}		Full	0		V+	V
On-Resistance	R_{ON}	V+ = 1.8 V, V_{COM} = 1 V, I_{NO}, I_{NC} = 10 mA	Room Full		15 17	30 32	Ω
R_{ON} Flatness[d]	R_{ON} Flatness	V+ = 1.8 V, V_{COM} = 0 V to V+, I_{NO}, I_{NC} = 10 mA	Room		5		
Switch Off Leakage Current[g]	$I_{NO(off)}$ $I_{NC(off)}$	V+ = 2.2 V V_{NO}, V_{NC} = 0.5 V/1.5 V, V_{COM} = 1.5 V/0.5 V	Room Full	- 300 - 3.5		300 3.5	pA nA
	$I_{COM(off)}$		Room Full	- 300 - 3.5		300 3.5	pA nA
Channel-On Leakage Current[g]	$I_{COM(on)}$	V+ = 2.2 V, V_{NO}, V_{NC} = V_{COM} = 0.5 V/1.5 V	Room Full	- 350 - 3.5		300 3.5	pA nA
Digital Control							
Input High Voltage	V_{INH}		Full	1.6			V
Input Low Voltage	V_{INL}		Full			0.4	
Input Capacitance	C_{in}		Full		4		pF
Input Current	I_{INL} or I_{INH}	V_{IN} = 0 V or V+	Full	1		1	µA
Dynamic Characteristics							
Turn-On Time	t_{ON}	V_{NO} or V_{NC} = 1.5 V, R_L = 300 Ω, C_L = 35 pF	Room Full		30	50 53	ns
Turn-Off Time	t_{OFF}		Room Full		15	30 33	
Break-Before-Make Time	t_d		Room	1	15		
Charge Injection[d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, R_{GEN} = 0 Ω	Room		1	10	pC
Off-Isolation[d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room		- 71		dB
Crosstalk[d]	X_{TALK}		Room		- 70		
N_O, N_C Off Capacitance[d]	$C_{NO(off)}$ $C_{NC(off)}$	V_{IN} = 0 V or V+, f = 1 MHz	Room		17		pF
Channel-On Capacitance[d]	C_{ON}		Room		50		
Power Supply							
Power Supply Range	V+			1.8		2.20	V
Power Supply Current	I+	V_{IN} = 0 V or V+			0.01	1	µA
Power Consumption	P_C					2.2	µW

This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

SPECIFICATIONS (V+ = 3 V)							
Parameter	**Symbol**	**Test Conditions Unless Otherwise Specified** V+ = 3 V, ± 10 % V_{IN} = 0.4 V or 2 V[e]	**Temp.[a]**	**Limits - 40 °C to 85 °C Min.[b]**	**Typ.[c]**	**Max.[b]**	**Unit**
Analog Switch							
Analog Signal Range[d]	V_{NO}, V_{NC}, V_{COM}		Full	0		V+	V
On-Resistance	R_{ON}	V+ = 2.7 V, V_{COM} = 1.5 V, I_{NO}, I_{NC} = 10 mA	Room Full		5 6	9.2 10.2	Ω
R_{ON} Flatness[d]	R_{ON} Flatness	V+ = 2.7 V, V_{COM} = 0 V to V+, I_{NO}, I_{NC} = 10 mA	Room		3		
Switch Off Leakage Current[g]	$I_{NO(off)}$, $I_{NC(off)}$	V+ = 3.3 V V_{NO}, V_{NC} = 1 V/3 V, V_{COM} = 3 V/1 V	Room Full	- 400 - 4.5		400 4.5	pA nA
	$I_{COM(off)}$		Room Full	- 400 - 4.5		400 4.5	pA nA
Channel-On Leakage Current[g]	$I_{COM(on)}$	V+ = 3.3 V, V_{NO}, V_{NC} = V_{COM} = 1 V/3 V	Room Full	- 450 - 4.5		400 4.5	pA nA
Digital Control							
Input High Voltage	V_{INH}		Full	2			V
Input Low Voltage	V_{INL}		Full			0.4	
Input Capacitance	C_{in}		Full		4		pF
Input Current	I_{INL} or I_{INH}	V_{IN} = 0 V or V+	Full	1		1	µA
Dynamic Characteristics							
Turn-On Time	t_{ON}	V_{NO} or V_{NC} = 2 V, R_L = 300 Ω, C_L = 35 pF	Room Full		24	45 48	ns
Turn-Off Time	t_{OFF}		Room Full		12	30 33	
Break-Before-Make Time	t_d		Room	1	13		
Charge Injection[d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, R_{GEN} = 0 Ω	Room		3	10	pC
Off-Isolation[d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room		- 71		dB
Crosstalk[d]	X_{TALK}		Room		- 70		
N_O, N_C Off Capacitance[d]	$C_{NO(off)}$, $C_{NC(off)}$	V_{IN} = 0 V or V+, f = 1 MHz	Room		17		pF
Channel-On Capacitance[d]	C_{ON}		Room		50		
Power Supply							
Power Supply Range	V+			2.7		3.3	V
Power Supply Current	I+	V_{IN} = 0 V or V+			0.01	1	µA
Power Consumption	P_C					3.3	µW

This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.


SPECIFICATIONS (V+ = 5 V)							
Parameter	**Symbol**	**Test Conditions Unless Otherwise Specified** V+ = 5 V, ± 10 % V_{IN} = 0.8 V or 2.4 V[e]	**Temp.[a]**	**Limits - 40 °C to 85 °C Min.[b]**	**Typ.[c]**	**Max.[b]**	**Unit**
Analog Switch							
Analog Signal Range[d]	V_{NO}, V_{NC} V_{COM}		Full	0		V+	V
On-Resistance	R_{ON}	V+ = 4.5 V, V_{COM} = 3 V, I_{NO}, I_{NC} = 10 mA	Room Full		3 4	7 8	Ω
R_{ON} Flatness[d]	R_{ON} Flatness	V+ = 4.5 V, V_{COM} = 0 V to V+, I_{NO}, I_{NC} = 10 mA	Room		2		Ω
Switch Off Leakage Current[g]	$I_{NO(off)}$ $I_{NC(off)}$	V+ = 5.5 V V_{NO}, V_{NC} = 1 V/4.5 V, V_{COM} = 4.5 V/1 V	Room Full	- 900 - 5.5		900 5.5	pA nA
	$I_{COM(off)}$		Room Full	- 900 - 5.5		900 5.5	pA nA
Channel-On Leakage Current[g]	$I_{COM(on)}$	V+ = 5.5 V, V+ = 5.5 V V_{NO}, V_{NC} = V_{COM} = 1 V/4.5 V	Room Full	- 1000 - 5.5		1000 5.5	pA nA
Digital Control							
Input High Voltage	V_{INH}		Full	2.4			V
Input Low Voltage	V_{INL}		Full			0.8	V
Input Capacitance	C_{in}		Full		4		pF
Input Current	I_{INL} or I_{INH}	V_{IN} = 0 V or V+	Full	1		1	µA
Dynamic Characteristics							
Turn-On Time	t_{ON}	V_{NO} or V_{NC} = 3 V, R_L = 300 Ω, C_L = 35 pF	Room Full		20	37 40	ns
Turn-Off Time	t_{OFF}		Room Full		10	27 30	ns
Break-Before-Make Time	t_d		Room	1	10		ns
Charge Injection[d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, R_{GEN} = 0 Ω	Room		7	10	pC
Off-Isolation[d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room		- 71		dB
Crosstalk[d]	X_{TALK}		Room		- 70		dB
Source-Off Capacitance[d]	$C_{NO(off)}$ $C_{NC(off)}$	V_{IN} = 0 V or V+, f = 1 MHz	Room		17		pF
Channel-On Capacitance[d]	C_{ON}		Room		50		pF
Power Supply							
Power Supply Range	V+			4.5		5.5	V
Power Supply Current	I+	V_{IN} = 0 V or V+			0.01	1	µA
Power Consumption	P_C					5.5	µW

Notes:
a. Room = 25 °C, Full = as determined by the operating suffix.
b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
c. Typical values are for design aid only, not guaranteed nor subject to production testing.
d. Guarantee by design, nor subjected to production test.
e. V_{IN} = input voltage to perform proper function.
f. Guaranteed by 5 V leakage testing, not production tested.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

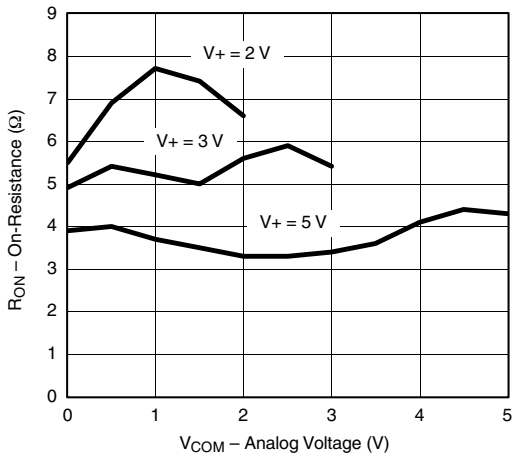


R_{ON} vs. V_{COM} and Supply Voltage

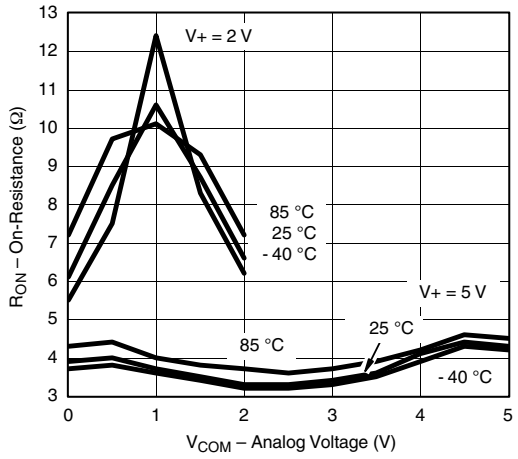


R_{ON} vs. Analog Voltage and Temperature

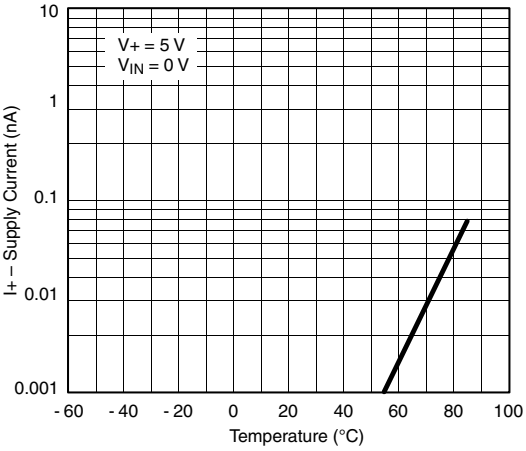


Supply Current vs. Temperature

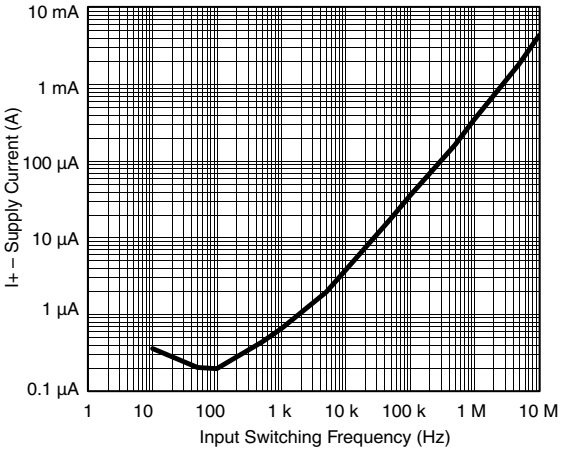

Supply Current vs. Input Switching Frequency

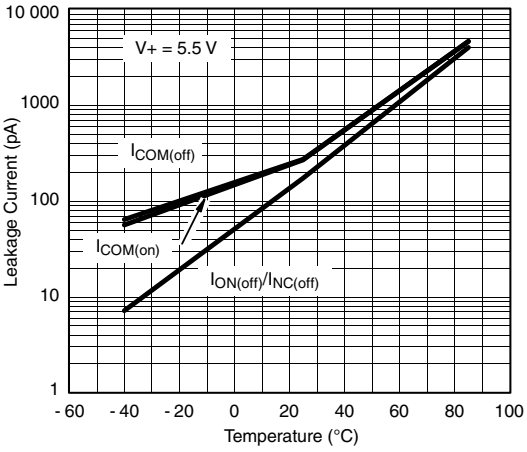


Leakage Current vs. Temperature

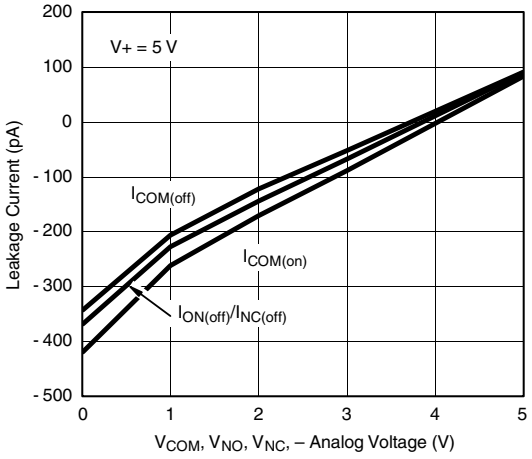


Leakage vs. Analog Voltage

This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

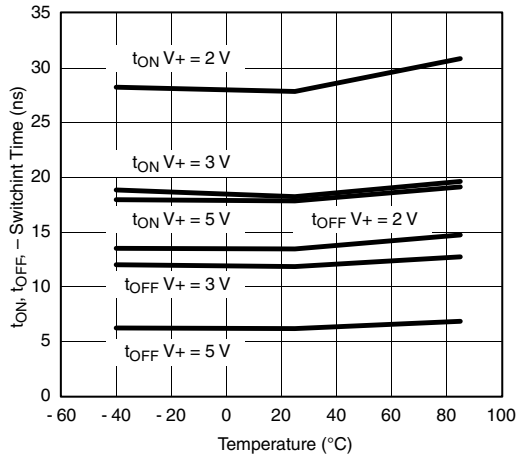


Switching Time vs. Temperature and Supply Voltage

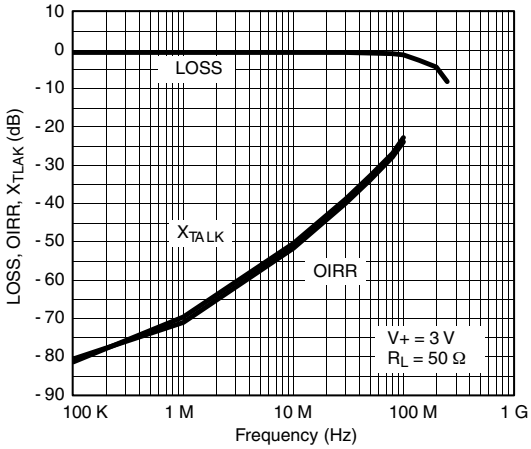

Insertion Loss, Off -Isolation Crosstalk vs. Frequency

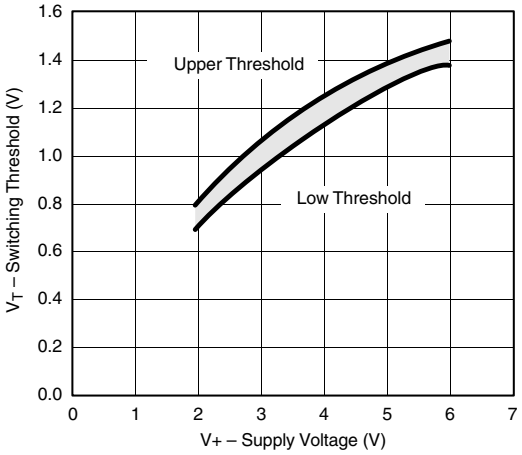


Switching Threshold vs. Supply Voltage

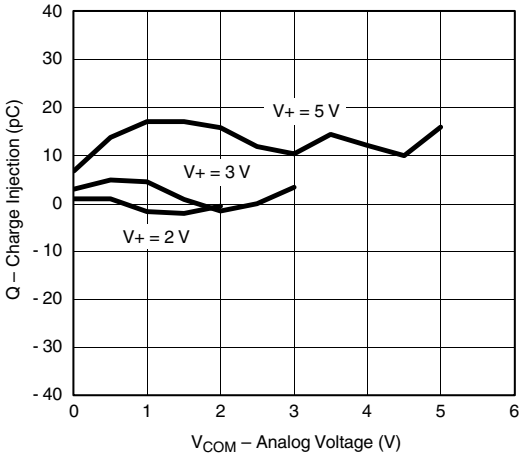

Charge Injection vs. Analog Voltage


This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

TEST CIRCUITS

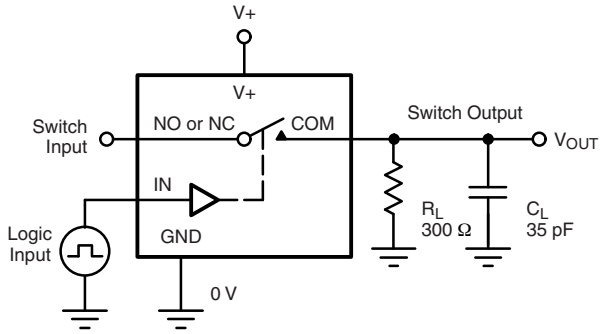


C_L (includes fixture and stray capacitance)

$$V_{OUT} = V_{COM}\left(\frac{R_L}{R_L + R_{ON}}\right)$$

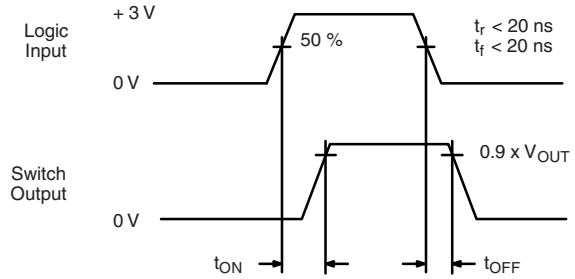

Logic "1" = Switch On
Logic input waveforms inverted for switches that have the opposite logic sense.

Figure 1. Switching Time

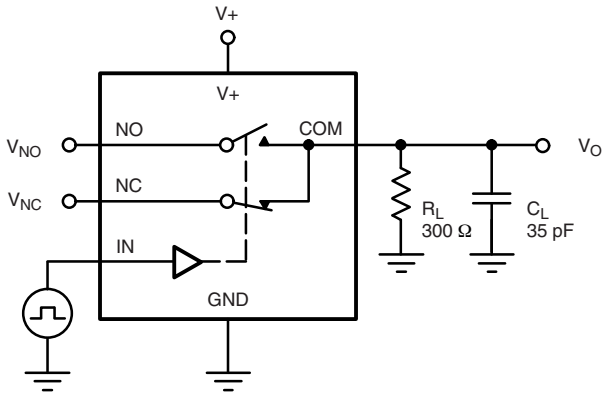

C_L (includes fixture and stray capacitance)



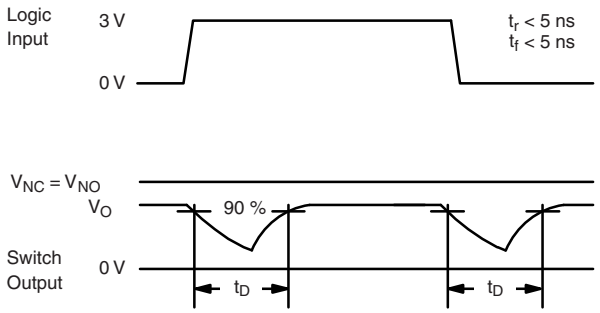


Figure 2. Break-Before-Make Interval

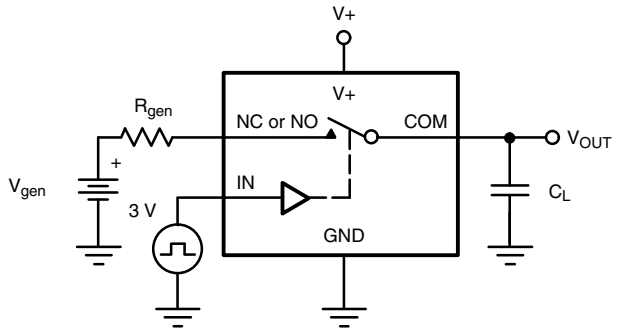

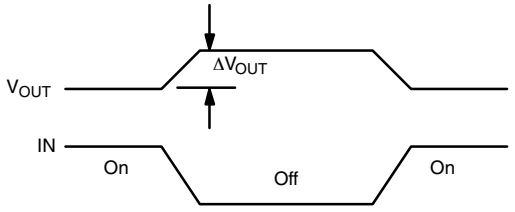

$Q = \Delta V_{OUT} \times C_L$

IN depends on switch configuration: input polarity determined by sense of switch.

Figure 3. Charge Injection

This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

TEST CIRCUITS

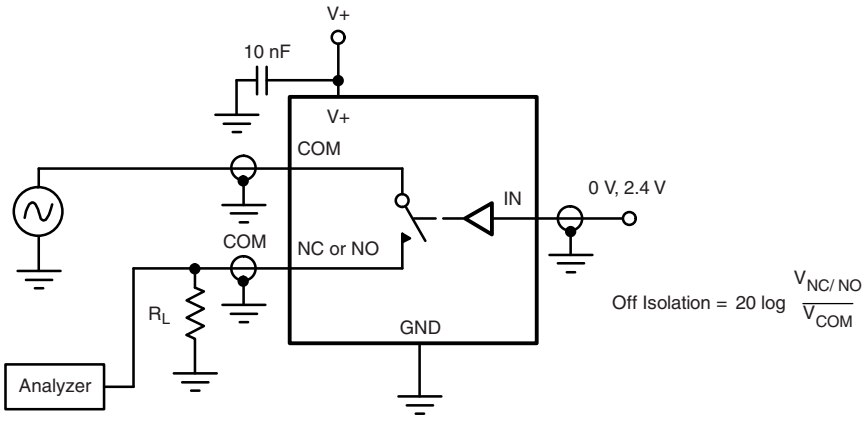


Figure 4. Off-Isolation

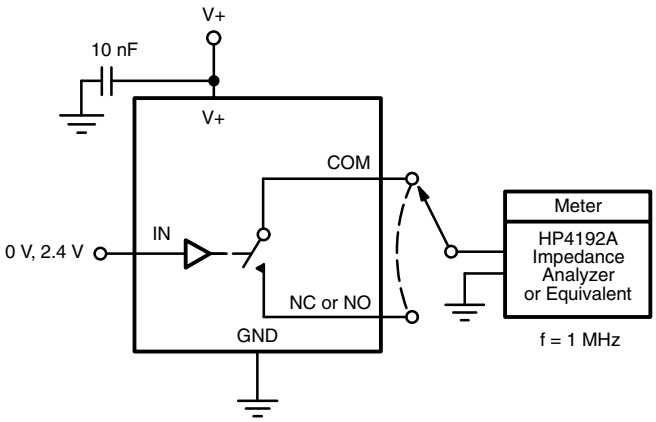



Figure 5. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?71398.


This document is subject to change without notice.
THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

TSOP: 5/6–LEAD


JEDEC Part Number: MO-193C

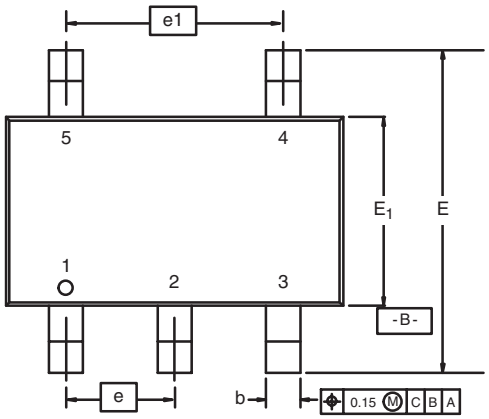


5-LEAD TSOP

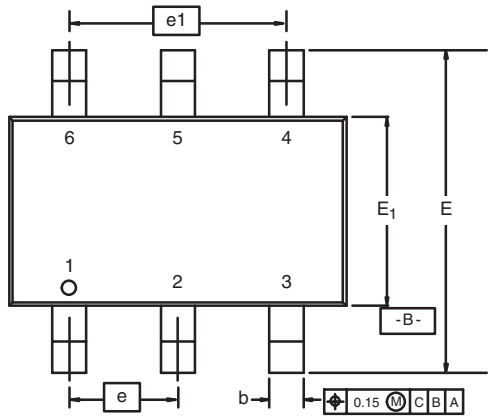

6-LEAD TSOP

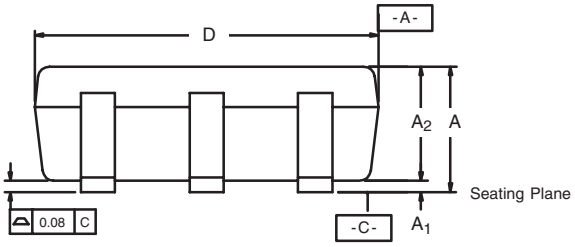

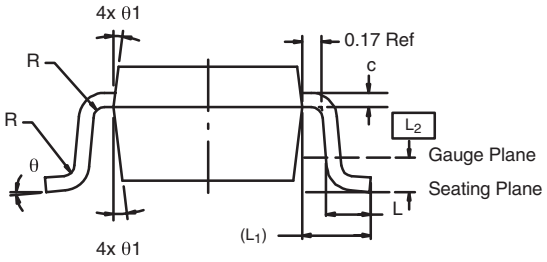

Dim	MILLIMETERS			INCHES		
	Min	Nom	Max	Min	Nom	Max
A	0.91	-	1.10	0.036	-	0.043
A_1	0.01	-	0.10	0.0004	-	0.004
A_2	0.90	-	1.00	0.035	0.038	0.039
b	0.30	0.32	0.45	0.012	0.013	0.018
c	0.10	0.15	0.20	0.004	0.006	0.008
D	2.95	3.05	3.10	0.116	0.120	0.122
E	2.70	2.85	2.98	0.106	0.112	0.117
E_1	1.55	1.65	1.70	0.061	0.065	0.067
e	0.95 BSC			0.0374 BSC		
e_1	1.80	1.90	2.00	0.071	0.075	0.079
L	0.32	-	0.50	0.012	-	0.020
L_1	0.60 Ref			0.024 Ref		
L_2	0.25 BSC			0.010 BSC		
R	0.10	-	-	0.004	-	-
θ	0°	4°	8°	0°	4°	8°
θ_1	7° Nom			7° Nom		
ECN: C-06593-Rev. I, 18-Dec-06 DWG: 5540						

Downloaded from Arrow.com.

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2026 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.