


# Fiber Optic Receiver

OPF2412, OPF2412T



## Features:

- Up to 5Mbps operation
- 850nm wavelength
- ST<sup>0</sup> style port
- CMOS and TTL compatible
- Wave solderable
- Wide temperature range

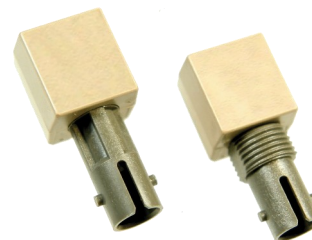


## Description:


The OPF2412 family is a low cost digital output fiber optic receiver. The lensed optical system keeps the receiver response consistent for all fiber sizes which makes it ideal for use on fibers as small as 50/125µm. The design incorporates a monolithic photo-IC comprised of a photodetector and DC amplifier driving an open collector output Schottky transistor. The output makes the OPF2412 compatible with TTL and CMOS logic. The receiver is designed to operate from a single +5 V supply. A bypass capacitor (0.1µF ceramic) should be connected from V<sub>CC</sub> to GND of the receiver.

## Applications:

- Industrial Ethernet equipment
- Copper-to-fiber media conversion
- Intra-system fiber optic links
- Video surveillance systems

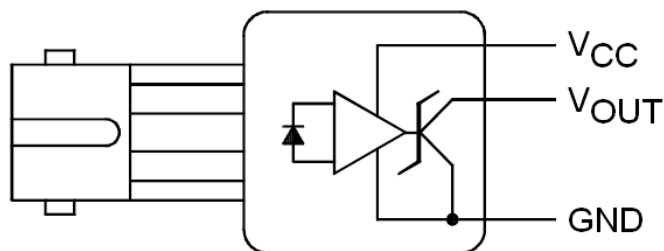

"T" suffix = Threaded ST<sup>0</sup> package

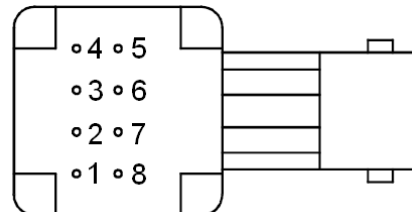

PIN	FUNCTION
1	Not Connected
2	V <sub>CC</sub>
3	GND
4	Not Connected
5	Not Connected
6	V <sub>OUT</sub>
7	GND
8	Not Connected

Pins 3 & 7 are electrically connected to the header.  
Pins 1,4,5 & 8 are mechanically connected together.



RoHS



ESD Class 2

ST<sup>0</sup> is a registered trademark of AT&T.

## General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.ttelectronics.com | sensors@ttelectronics.com

Issue C 05/2019 Page 1

### Mechanical Data

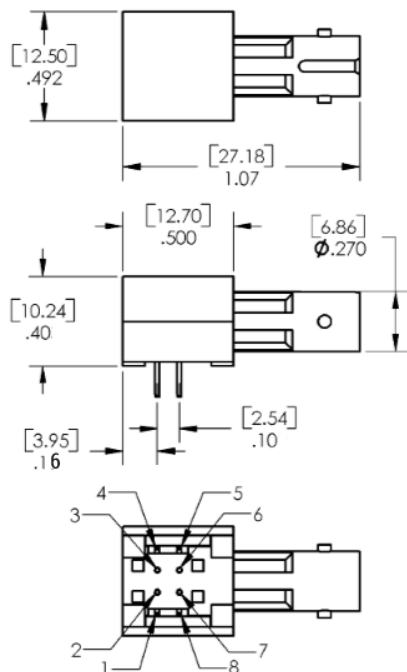


**OPF2412**

**OPF2412T**

3 place decimals ± .005

2 place decimals ± .01

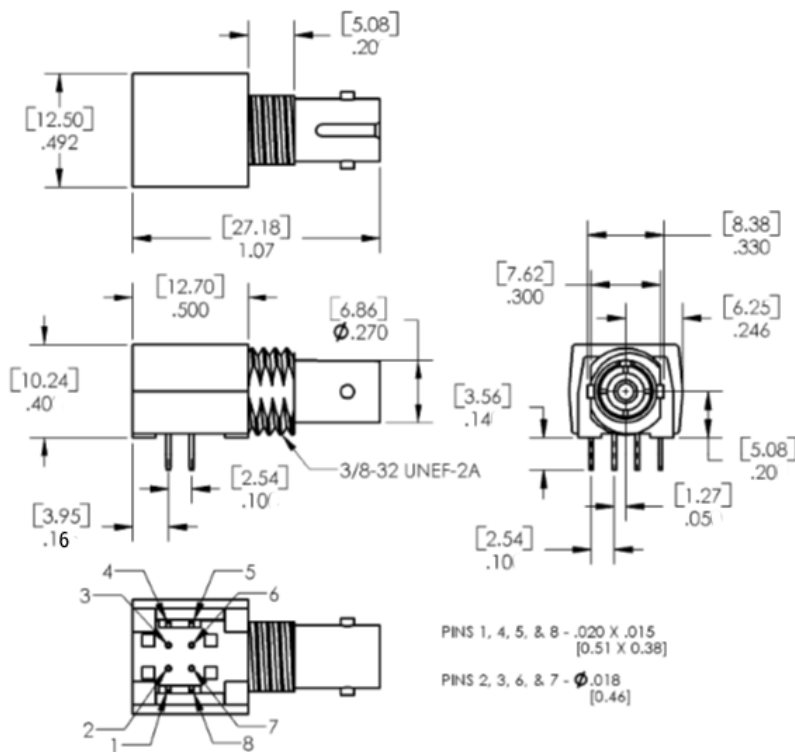

DIMENSIONS ARE IN: [MILLIMETERS]  
INCHES

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.ttelectronics.com | sensors@ttelectronics.com

Issue C 05/2019 Page 2

### Electrical Specifications


Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)	
Storage Temperature Range	$-55^\circ\text{C}$ to $+85^\circ\text{C}$
Operating Temperature Range	$-40^\circ\text{C}$ to $+85^\circ\text{C}$
Lead Soldering Temperature <sup>(1)</sup>	$260^\circ\text{C}$
Supply Voltage	$-0.5\text{ V}$ to $7.0\text{ V}$
Output Current	$25\text{ mA}$
Output Voltage	$-0.5\text{ V}$ to $18.0\text{ V}$
Open Collector Power Dissipation	$40\text{ mW}$
Fan Out (TTL)	5 <sup>(2)</sup>

Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
$I_{OH}$	High Level Output Current		5	250	$\mu\text{A}$	$V_O = 18\text{ V}$ , $P_R < -40\text{ dBm}$
$V_{OL}$	Low Level Output Voltage		0.4	0.5	V	$I_O = 8\text{ mA}$ , $P_R > -24\text{ dBm}$
$I_{CCH}$	High Level Supply Current		3.5	6.3	mA	$V_{CC} = 5.25\text{ V}$ , $P_R < -40\text{ dBm}$
$I_{CCL}$	Low Level Supply Current		6.2	10	mA	$V_{CC} = 5.25\text{ V}$ , $P_R > -24\text{ dBm}$
$P_{RH}$	Peak Input Power Level, Logic HIGH			0.1	$\mu\text{W}$	$\lambda_p = 850\text{ nm}$
$P_{RL}$	Peak Input Power Level, Logic LOW	2.9		120	$\mu\text{W}$	$\lambda_p = 850\text{ nm}$ , $I_{OL} = 8\text{ mA}$
$P_{RL}$	Peak Input Power Level, Logic LOW	4.0		100	$\mu\text{W}$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$
$t_{PLHR}$	Propagation Delay LOW to HIGH		65		ns	$P_R = -21\text{ dBm}$ , Data Rate = 5 MBd
$t_{PHLR}$	Propagation Delay HIGH to LOW		49		ns	$P_R = -21\text{ dBm}$ , Data Rate = 5 MBd

#### Notes:

- Maximum of 5 seconds with soldering iron. Duration can be extended to 10 seconds when flow soldering. RMA flux is recommended.
- 8 mA load ( $5 \times 1.6\text{ mA}$ ),  $R_L = 560\text{ }\Omega$ .

Application Circuit

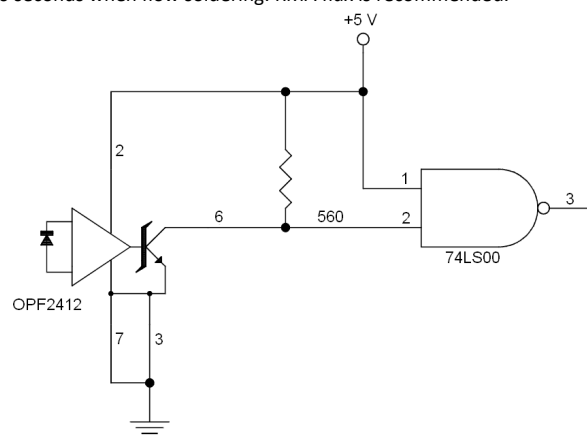

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.