G3VM-61VY4/351VY1

MOS FET Relays SOP 4-pin, General-purpose Type

High-sensitivity MOS FET relays in SOP 4-pin packages contribute to equipment power consumption reduction

- Contact form: 1a (SPST-NO)
- Load voltage: 60/350 V
- High-sensitivity type * Driving current: 2.0 mA (recommended condition)

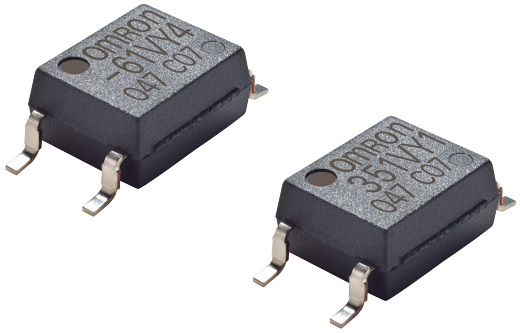

Note: The actual product is marked differently from the image shown here.

Application Examples

- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Security equipment
- Industrial equipment
- Power circuit
- Amusement equipment

Package (Unit: mm, Average)

Special SOP 4-pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load voltage
6 : 60 V
35: 350 V

2. Contact form
1 : 1a (SPST-NO)

3. Package
V : Special SOP 4-pin

4. Additional functions
Y : Dielectric strength between I/O 3,750 V

5. Other informations
When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
Special SOP 4-pin	1a (SPST-NO)	Surface mounting Terminals	60 V	700 mA	G3VM-61VY4	125 pcs.	G3VM-61VY4(TR05)	500 pcs.
			350 V	110 mA	G3VM-351VY1		G3VM-351VY1(TR05)	

* The AC peak and DC value are given for the load voltage and continuous load current.
Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR05)" to the end of the model number.

Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-61VY4	G3VM-351VY1	Unit	Measurement conditions
Input	LED forward current	I_F	30		mA	
	LED forward current reduction rate	ΔI_F/°C	-0.3		mA/°C	Ta≥25°C
	LED reverse voltage	V_R	6		V	
	Junction temperature	T_J	125		°C	
Output	Load voltage (AC peak/DC)	V_{OFF}	60	350	V	
	Continuous load current (AC peak/DC)	I_O	700	110	mA	
	ON current reduction rate	ΔI_O/°C	-8.3	-1.1	mA/°C	G3VM-61VY4 : Ta≥50°C G3VM-351VY1: Ta≥25°C
	Pulse ON current	Iop	2.1	0.33	A	t=100 ms, Duty=1/10
	Junction temperature	T_J	125		°C	
Dielectric strength between I/O *		V_{I-O}	3,750		Vrms	AC for 1 min
Ambient operating temperature		Ta	-40 to +85		°C	With no icing or condensation
Ambient storage temperature		Tstg	-55 to +125			
Soldering temperature		–	260			10 s

✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-61VY4	G3VM-351VY1	Unit	Measurement conditions
Input	LED forward voltage	V_F	Minimum	1.1		V	I_F=10 mA
			Typical	1.27			
			Maximum	1.4			
	Reverse current	I_R	Maximum	10		μA	V_R=5 V
	Capacitance between terminals	C_T	Typical	30		pF	V=0 V, f=1 MHz
	Trigger LED forward current	I_{FT}	Typical	0.1	0.2	mA	I_O=Continuous load current rated value
			Maximum	1			
	Release LED forward current	I_{FC}	Minimum	0.01		mA	G3VM-61VY4 : I_{OFF}=10 μA G3VM-351VY1: I_{OFF}=100 μA
Output	Maximum resistance with output ON	R_{ON}	Typical	0.15	28 (22)	Ω	I_F=2 mA, I_O=Continuous load current rated value ( ) is a value within t < 1s.
			Maximum	0.3	50 (35)		
	Current leakage when the relay is open	I_{LEAK}	Typical	2	1	nA	V_{OFF}=Load voltage rated value
			Maximum	1,000			
	Capacitance between terminal	C_{OFF}	Typical	100	30	pF	V=0 V, f=1 MHz
Capacitance between I/O terminals		C_{I-O}	Typical	0.8		pF	V_S=0 V, f=1 MHz
Insulation resistance between I/O terminals		R_{I-O}	Minimum	1,000		MΩ	V_{I-O}=500 VDC, RoH≤60%
			Typical	10^8			
Turn-ON time		t_{ON}	Typical	3	1	ms	I_F=2 mA, R_L=200 Ω, V_{DD}=20 V ✻
			Maximum	6	2		
Turn-OFF time		t_{OFF}	Typical	0.4	0.5		
			Maximum	1	1		

✻ Turn-ON and Turn-OFF Times





Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.
Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol		G3VM-61VY4	G3VM-351VY1	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	48	280	V
Operating LED forward current	I_F	Minimum	–		mA
		Typical	2		
		Maximum	25		
Continuous load current (AC peak/DC)	I_O	Maximum	700	110	
Ambient operating temperature	T_a	Minimum	-40		°C
		Maximum	85		

Spacing and Insulation

Item	G3VM-61VY4	G3VM-351VY1	Unit
	Minimum		
Creepage distances	5.0		mm
Clearance distances	5.0		
Internal isolation thickness	0.2		

Engineering Data

LED forward current vs. Ambient temperature

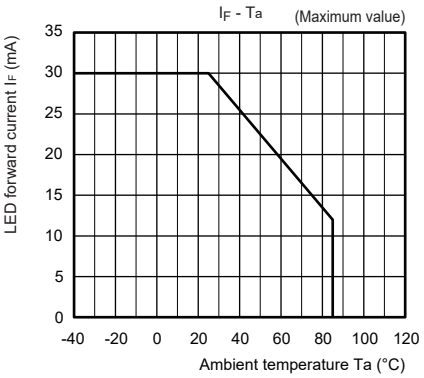

Continuous load current vs. Ambient temperature

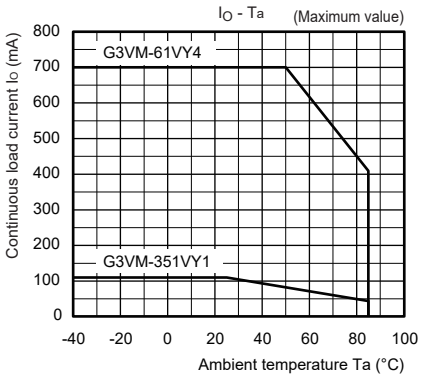

LED forward current vs. LED forward voltage

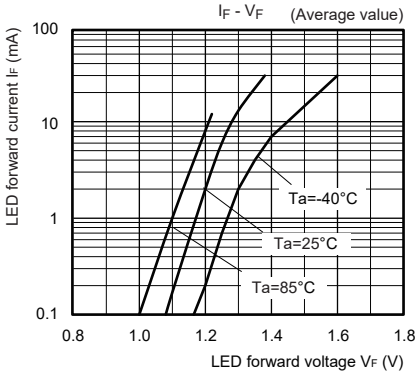

Continuous load current vs. On-state voltage G3VM-61VY4

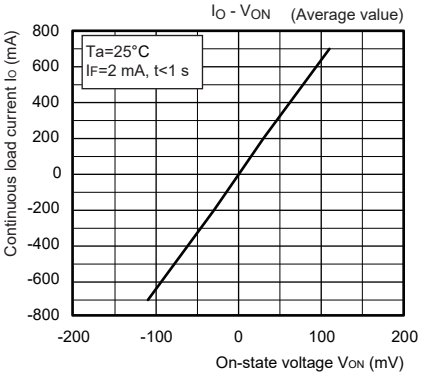

G3VM-351VY1

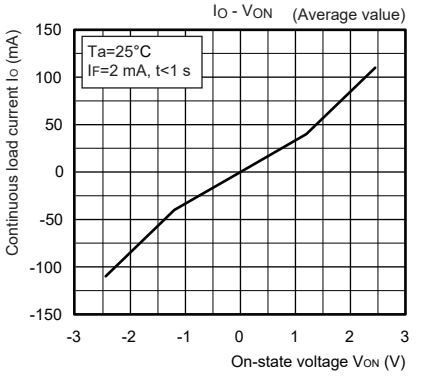

On-state resistance vs. Ambient temperature G3VM-61VY4

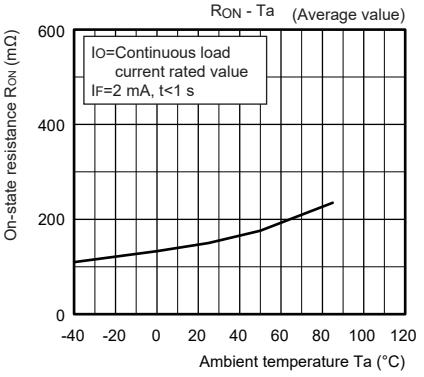

G3VM-351VY1

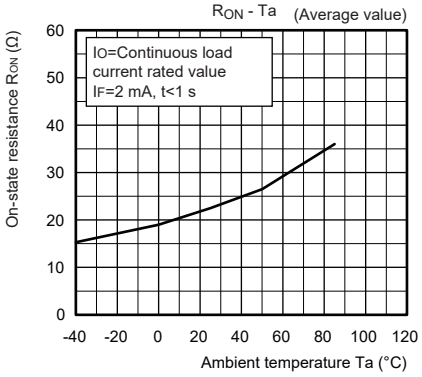

Trigger LED forward current vs. Ambient temperature

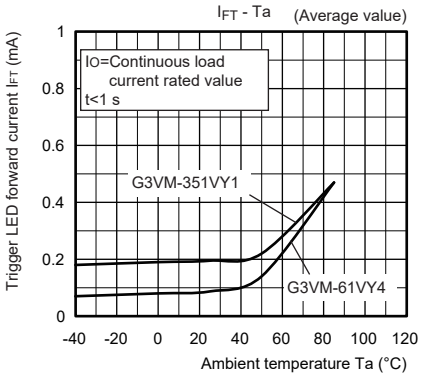

Turn ON, Turn OFF time vs. LED forward current

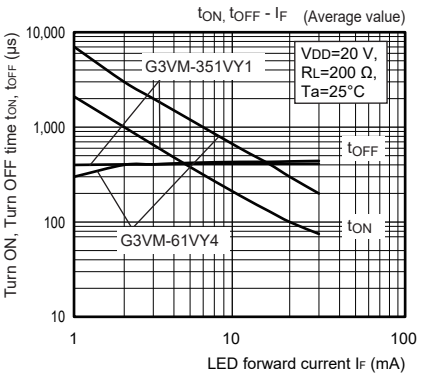

Engineering Data

Turn ON, Turn OFF time vs. Ambient temperature

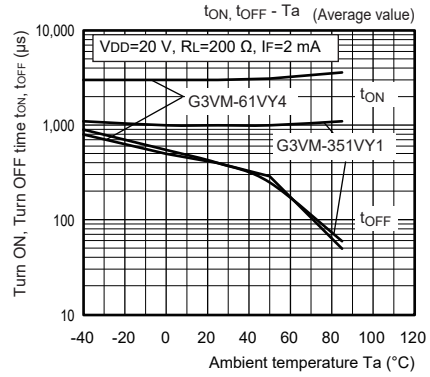

Current leakage vs. Ambient temperature

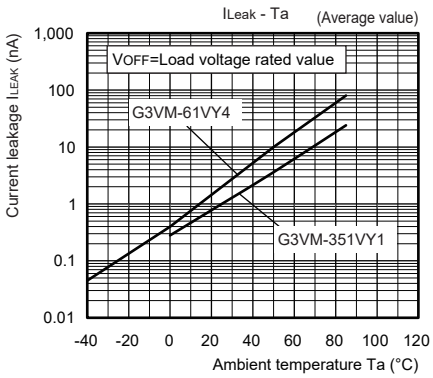

Current leakage vs. Load voltage

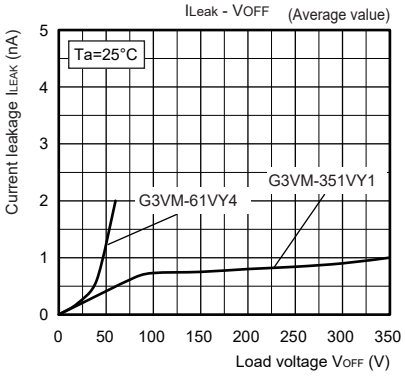

Relative capacity between output terminals vs. Load voltage

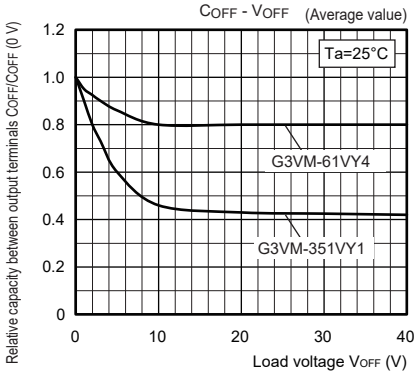

G3VM-61VY4/351VY1

Appearance/Terminal Arrangement/Internal Connections

Appearance

Special SOP 4-pin



Note: 1. The actual product is marked differently from the image shown here.
Note: 2. “G3VM” does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

Terminal Arrangement/Internal Connections (Top View)



Dimensions

(Unit: mm)

Special SOP 4-pin *



Surface-mounting Terminals

Weight: 0.1 g



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



✻ The external dimensions are different from those of the standard SOP 4-pin, but the mounting pad dimensions are the same.
Note: The actual product is marked differently from the image shown here.

Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-61VY4 **G3VM-351VY1**	UL recognized	1a (SPST-NO)	E80555

Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

MEMO

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us

Europe
https://components.omron.com/eu

Asia-Pacific
https://components.omron.com/ap

China
https://components.omron.com.cn

Korea
https://components.omron.com/kr

Japan
https://components.omron.com/jp

Cat. No. K347-E1-01
1222