

95 Series - Socket overview for 40 series relays



95.05	7
See page	10


Module	Socket	Relay	Description	Mounting	Accessories
99.02	95.03	40.31	Screw terminal (Box clamp) socket	Panel or 35 mm rail	- Coil indication and EMC
	95.05	40.51	- Top terminals - Contacts	(EN 60715) mount	suppression modules
		40.52	- Bottom terminals - Coil		- Jumper link
7		40.61			- Timer modules
200					- Plastic retaining and release
13.37					clip



Module	Socket	Relay	Description	Mounting	Accessories
99.80	95.83.3	40.31	Screw terminal (Box clamp) socket	Panel or 35 mm rail	- Coil indication and EMC
-	95.85.3	40.51	95.83.3 wiring:	(EN 60715) mount	suppression modules
Section 1		40.52	- Top terminals - Contacts		- Jumper link
		40.61	- Bottom terminals - Coil		- Plastic retaining and release clip



Module	Socket	Relay	Description	Mounting	Accessories
99.80	95.93.3	40.31	Screw terminal (Box clamp) socket	Panel or 35 mm rail	- Coil indication and EMC
-	95.95.3	40.51	- Top terminals - Contacts	(EN 60715) mount	suppression modules
FEET STATE		40.52	- Bottom terminals - Coil		- Jumper link
€33		40.61			- Plastic retaining and release
					clip



95.55

See page 1

	Module	Socket	Relay	Description	Mounting	Accessories
/	99.02	95.55	40.51	Screwless terminal socket	Panel or 35 mm rail	- Coil indication and EMC
				- For fast cable connections	(EN 60715) mount	suppression modules
			40.61	- Top terminals - Contacts		- Timer modules
	25			- Bottom terminals - Coil		 Plastic retaining and release clip
	鱼					спр
	79/3/380					



See	page	14

Module	Socket	Relay	Description	Mounting	Accessories
99.80	95.55.3	40.51	Screwless terminal socket	Panel or 35 mm rail	- Coil indication and EMC
			For fast cable connections - Top terminals - Contacts - Bottom terminals - Coil	(EN 60715) mount	suppression modules - Plastic retaining and release clip



95.63 See page 15

Module	Socket	Relay	Description	Mounting	Accessories
99.01	95.63	40.31	Screw terminal (Box clamp) socket	Panel or 35 mm rail	- Coil indication and EMC
			- Top terminals - Contacts - Bottom terminals - Coil	(EN 60715) mount	suppression modules - Metal retaining clip

Mounting

Panel or 35 mm rail

(EN 60715) mount

Accessories

- Metal retaining clip



Module Socket

95.65

Relay

40.51

40.52

40.61

Description

Screw terminal (Box clamp) socket

- Top terminals - Contacts

- Bottom terminals - Coil

See page 15

-			
TO SE	-	-	-
	76		
	-	-81	100
		7	

95.13.2 See page 16

	Socket	,	Description	Mounting	Accessories
_	95.13.2	40.31	PCB socket	PCB mounting	- Metal retaining clip
		40.41			- Plastic retaining clip
_	95.15.2	40.51			
		40.52			
		40.61			





Approvals (according to type):








095.01




060.72

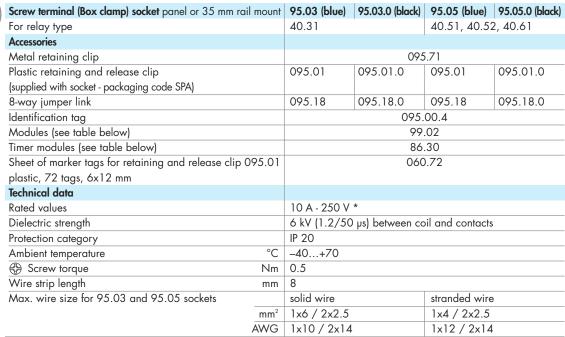


* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

60.9

10 A - 250 V

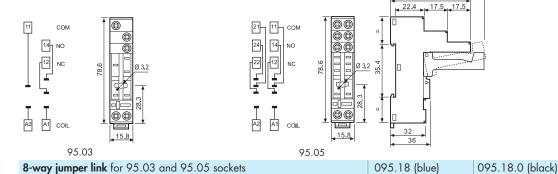









Approvals (according to type):



DC Modules with non-standard polarity (+A2) on request.

3.3				110.5				√ → √ 5.1
	15	15.8	15.8	15.8	15.8	15.8	15	

86 series timer modules	
(1224)V AC/DC; Bi-function: AI, DI; (0.05s100h)	86.30.0.024.0000
(110125)V AC; Bi-function: AI, DI; (0.05s100h)	86.30.8.120.0000
(230240)V AC: Bi-function: Al. DI: (0.05s100h)	86.30.8.240.0000

Approvals

(according to type): (F (CF)

(deceraing to type).			
99.02 coil indication and EMC suppression modules for 95.03 and 95.05 sockets			
Diode (+A1, standard polarity)	(6220)V DC	99.02.3.000.00	
LED	(624)V DC/AC	99.02.0.024.59	
LED	(2860)V DC/AC	99.02.0.060.59	
LED	(110240)V DC/AC	99.02.0.230.59	
LED + Diode (+A1, standard polarity)	(624)V DC	99.02.9.024.99	
LED + Diode (+A1, standard polarity)	(2860)V DC	99.02.9.060.99	
LED + Diode (+A1, standard polarity)	(110220)V DC	99.02.9.220.99	
LED + Varistor	(624)V DC/AC	99.02.0.024.98	
LED + Varistor	(2860)V DC/AC	99.02.0.060.98	
LED + Varistor	(110240)V DC/AC	99.02.0.230.98	
RC circuit	(624)V DC/AC	99.02.0.024.09	
RC circuit	(2860)V DC/AC	99.02.0.060.09	
RC circuit	(110240)V DC/AC	99.02.0.230.09	
Residual current by-pass	(110240)V AC	99.02.8.230.07	

finder

95 Series - Sockets and accessories for 40 series relays



Approvals (according to type):








095.91.3




060.72

Screw terminal (Box clamp) socket panel or 35 mm rail mount	95.83.3 (blue)	95.83.30 (black)	95.85.3 (blue)	95.85.30 (black)
For relay type	40.31		40.51, 40.52	2, 40.61
Accessories				
Metal retaining clip		095	.71	
Plastic retaining and release clip	095.91.3	095.91.30	095.91.3	095.91.30
(supplied with socket - packaging code SPA)				
8-way jumper link	095.08	095.08.0	095.08	095.08.0
Identification tag		095.	80.3	
Modules (see table below)	99.80			
Sheet of marker tags for retaining and release clip 095.91.3	060.72			
plastic, 72 tags, 6x12 mm				
Technical data				
Rated values	10 A - 250 V	10 A - 250 V *		
Dielectric strength	6 kV (1.2/50 μs) between coil and contacts (95.83.3 only)			
Protection category	IP 20			
Ambient temperature °C	-40+70			
⊕ Screw torque Nm	Screw torque Nm 0.5			
Wire strip length mm	7			
Max. wire size for 95.83.3 and 95.85.3 sockets	solid wire		stranded wire	.
m ²	1x6 / 2x2.5		1x4 / 2x2.5	
AWG	1x10 / 2x14		1x12 / 2x14	


^{*} For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.



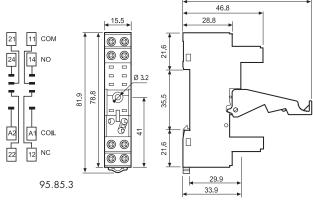



0	005 00 /1.1)	005 00 0 (1.1
8-way jumper link for 95.83.3 and 95.85.3 sockets	095.08 (blue)	095.08.0 (black)
Rated values	10 A - 250 V	





Approvals (according to type):



* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

99.80 coil indication and EMC suppression modules for 95.83.3 and 95.85.3 sockets				
		Blue*		
Diode (+A1, standard polarity)	(6220)V DC	99.80.3.000.00		
LED	(624)V DC/AC	99.80.0.024.59		
LED	(2860)V DC/AC	99.80.0.060.59		
LED	(110240)V DC/AC	99.80.0.230.59		
LED + Diode (+A1, standard polarity)	(624)V DC	99.80.9.024.99		
LED + Diode (+A1, standard polarity)	(2860)V DC	99.80.9.060.99		
LED + Diode (+A1, standard polarity)	(110220)V DC	99.80.9.220.99		
LED + Varistor	(624)V DC/AC	99.80.0.024.98		
LED + Varistor	(2860)V DC/AC	99.80.0.060.98		
LED + Varistor	(110240)V DC/AC	99.80.0.230.98		
RC circuit	(624)V DC/AC	99.80.0.024.09		
RC circuit	(2860)V DC/AC	99.80.0.060.09		
RC circuit	(110240)V DC/AC	99.80.0.230.09		
Residual current by-pass	(110240)V AC	99.80.8.230.07		






Approvals (according to type):








060.72


				1
Screw (Box clamp) terminal socket panel or 35 mm rail mount		95.93.30 (black)		95.95.30 (black)
For relay type	40.31		40.51, 40.52	2, 40.61
Accessories				
Metal retaining clip		095	5.71	
Plastic retaining and release clip	095.91.3	095.91.30	095.91.3	095.91.30
8-way jumper link	095.08	095.08.0	095.08	095.08.0
Identification tag		095.	80.3	
Modules (see table below)		99.	.80	
Sheet of marker tags for retaining and release clip 095.91.3		060.72		
plastic, 72 tags, 6x12 mm				
Technical data				
Rated values	10 A - 250 V	*		
Dielectric strength	6 kV (1.2/50	µs) between co	il and contacts	;
otection category IP 20				
Ambient temperature °C	-40+70			
Screw torque Nm	0.5			
Wire strip length mm	8			
Max. wire size for 95.93.3 and 95.95.3 sockets	solid wire		stranded wire	;
m ²	1x6 / 2x2.5		1x4 / 2x2.5	
AWG	1x10 / 2x14		1x12 / 2x14	

^{*} For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

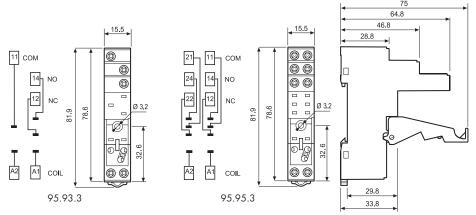



8-way jumper link for 95.93.3 and 95.95.3 sockets	095.08 (blue)	095.08.0 (black)
Rated values	10 A - 250 V	





Approvals (according to type):



* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

		Blue*
Diode (+A1, standard polarity)	(6220)V DC	99.80.3.000.00
LED	(624)V DC/AC	99.80.0.024.59
LED	(2860)V DC/AC	99.80.0.060.59
LED	(110240)V DC/AC	99.80.0.230.59
LED + Diode (+A1, standard polarity)	(624)V DC	99.80.9.024.99
LED + Diode (+A1, standard polarity)	(2860)V DC	99.80.9.060.99
LED + Diode (+A1, standard polarity)	(110220)V DC	99.80.9.220.99
LED + Varistor	(624)V DC/AC	99.80.0.024.98
LED + Varistor	(2860)V DC/AC	99.80.0.060.98
LED + Varistor	(110240)V DC/AC	99.80.0.230.98
RC circuit	(624)V DC/AC	99.80.0.024.09
RC circuit	(2860)V DC/AC	99.80.0.060.09
RC circuit	(110240)V DC/AC	99.80.0.230.09
Residual current by-pass	(110240)V AC	99.80.8.230.07

finder

95 Series - Sockets and accessories for 40 series relays



Approvals (according to type):






060.72

Screwless terminal socket panel or 35 mm rail mount	95.55 (blue)	95.55.0 (black)	
For relay type	40.51, 40.52, 40.61		
Accessories			
Metal retaining clip	095.71		
Plastic retaining and release clip	095.91.3		
(supplied with socket - packaging code SPA)			
Modules (see table below)	99.02		
Timer modules (see table below)	86.30		
Sheet of marker tags for retaining and release clip 095.91.3	3 060.72		
plastic, 72 tags, 6x12 mm			
Technical data			
Rated values	10 A - 250 V *		
Dielectric strength	6 kV (1.2/50 µs) between coil and contacts		
Protection category	IP 20		
Ambient temperature °C	2 –25+70		
Wire strip length mm	8		
Max. wire size for 95.55 socket	solid wire	stranded wire	
mm ²	2x(0.21.5)	2x(0.21.5)	
AWG	2x(2418)	2x(2418)	

^{*} For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

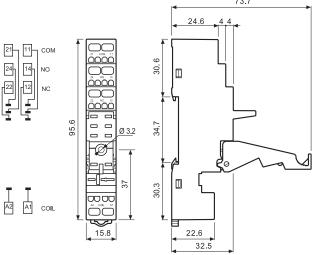





Approvals (according to type):

C cAN°us

DC Modules with non-standard polarity (+A2) on request.

86 series timer modules	
(1224)V AC/DC; Bi-function: AI, DI; (0.05s100h)	86.30.0.024.0000
(110125)V AC; Bi-function: AI, DI; (0.05s100h)	86.30.8.120.0000
(230240)V AC; Bi-function: AI, DI; (0.05s100h)	86.30.8.240.0000

Approvals

oo oo dadaa dadaa da	11 (05.55) .		
99.02 coil indication and EMC suppression modules for 95.55 socket			
Diode (+A1, standard polarity)	(6220)V DC	99.02.3.000.00	
LED	(624)V DC/AC	99.02.0.024.59	
LED	(2860)V DC/AC	99.02.0.060.59	
LED	(110240)V DC/AC	99.02.0.230.59	
LED + Diode (+A1, standard polarity)	(624)V DC	99.02.9.024.99	
LED + Diode (+A1, standard polarity)	(2860)V DC	99.02.9.060.99	
LED + Diode (+A1, standard polarity)	(110220)V DC	99.02.9.220.99	
LED + Varistor	(624)V DC/AC	99.02.0.024.98	
LED + Varistor	(2860)V DC/AC	99.02.0.060.98	
LED + Varistor	(110240)V DC/AC	99.02.0.230.98	
RC circuit	(624)V DC/AC	99.02.0.024.09	
RC circuit	(2860)V DC/AC	99.02.0.060.09	
RC circuit	(110240)V DC/AC	99.02.0.230.09	
Residual current by-pass	(110240)V AC	99.02.8.230.07	





Approvals (according to type):











095.91.3



060.72

Screwless terminal socket panel or 35 mm rail mount	95.55.3 (blue)	95.55.30 (black)	
For relay type	40.51, 40.52, 40.61		
Accessories			
Metal retaining clip	095.71		
Plastic retaining and release clip	095.91.3		
(supplied with socket - packaging code SPA)			
Modules (see table below)	99.80		
Sheet of marker tags for retaining and release clip 095.91.3	060.72		
plastic, 72 tags, 6x12 mm			
Technical data			
Rated values	10 A - 250 V *		
Dielectric strength	6 kV (1.2/50 μs) between co	oil and contacts	
Protection category	IP 20		
Ambient temperature °C	C –25+70		
Wire strip length mm	n 8		
Max. wire size for 95.55.3 socket	solid wire	stranded wire	
mm ²	2x(0.21.5)	2x(0.21.5)	
AWG	2x(2418)	2x(2418)	

^{*} For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

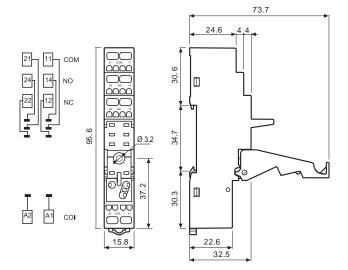



Approvals (according to type):



* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

99.80 coil indication and EMC suppression modules for 95.55.3 socket						
		Blue*				
Diode (+A1, standard polarity)	(6220)V DC	99.80.3.000.00				
LED	(624)V DC/AC	99.80.0.024.59				
LED	(2860)V DC/AC	99.80.0.060.59				
LED	(110240)V DC/AC	99.80.0.230.59				
LED + Diode (+A1, standard polarity)	(624)V DC	99.80.9.024.99				
LED + Diode (+A1, standard polarity)	(2860)V DC	99.80.9.060.99				
LED + Diode (+A1, standard polarity)	(110220)V DC	99.80.9.220.99				
LED + Varistor	(624)V DC/AC	99.80.0.024.98				
LED + Varistor	(2860)V DC/AC	99.80.0.060.98				
LED + Varistor	(110240)V DC/AC	99.80.0.230.98				
RC circuit	(624)V DC/AC	99.80.0.024.09				
RC circuit	(2860)V DC/AC	99.80.0.060.09				
RC circuit	(110240)V DC/AC	99.80.0.230.09				
Residual current by-pass	(110240)V AC	99.80.8.230.07				





Approvals (according to type):











Approvals (according to type):







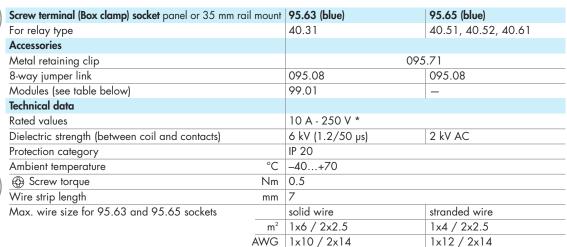

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

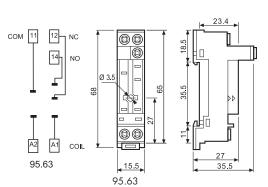








8-way jumper link for 95.63 and 95.65 sockets	095.08 (blue)
Rated values	10 A - 250 V





Approvals (according to type):



* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

99.01	coil indication	and EMC	suppression	modules	for type	95.63	socket

		Blue*	
Diode (+A1, standard polarity)	(6220)V DC	99.01.3.000.00	
Diode (+A2, non-standard polarity)	(6220)V DC	99.01.2.000.00	
LED	(624)V DC/AC	99.01.0.024.59	
LED	(2860)V DC/AC	99.01.0.060.59	
LED	(110240)V DC/AC	99.01.0.230.59	
LED + Diode (+A1, standard polarity)	(624)V DC	99.01.9.024.99	
LED + Diode (+A1, standard polarity)	(2860)V DC	99.01.9.060.99	
LED + Diode (+A1, standard polarity)	(110220)V DC	99.01.9.220.99	
LED + Diode (+A2, non-standard polarity)	(624)V DC	99.01.9.024.79	
LED + Diode (+A2, non-standard polarity)	(2860)V DC	99.01.9.060.79	
LED + Diode (+A2, non-standard polarity)	(110220)V DC	99.01.9.220.79	
LED + Varistor	(624)V DC/AC	99.01.0.024.98	
LED + Varistor	(2860)V DC/AC	99.01.0.060.98	
LED + Varistor	(110240)V DC/AC	99.01.0.230.98	
RC circuit	(624)V DC/AC	99.01.0.024.09	
RC circuit	(2860)V DC/AC	99.01.0.060.09	
RC circuit	(110240)V DC/AC	99.01.0.230.09	
Residual current by-pass	(110240)V AC	99.01.8.230.07	
			1.5





95.13.2



95.15.2


Approvals (according to type):










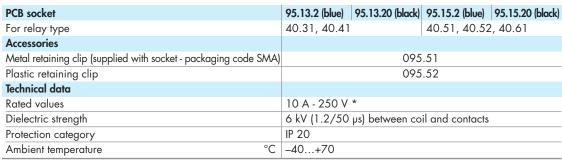

^{*} For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

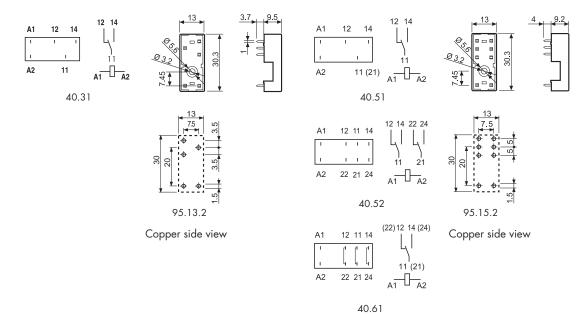

Packaging codes

How to code and identify retaining clip and packaging options for sockets.

Example:

