

G6C
PCB Power Relay

Miniature High Capacity Relays with SPST-NO 10A and SPST-NO + SPST-NC 8A





- SPST-NO 10A and SPST-NO + SPST-NC 8A for power switching and output that satisfy the needs for space-saving.
- Small High-capacity Relays Compact: 20 × 15 × 10 mm (L × W × H).
- Low power consumption: 200 mW.
- Ultrasonically cleanable models is available.
- Exclusive P6C model for sockets is now available.

■Model Number Legend

G6C□-□□□□□-□-□-□
1 2 3 4 5 6 7 8

1. Relay Function
None: Single-side stable
U : Single-winding latching
K : Double-winding latching

2. Contact Form
11: SPST-NO (1a)
21: SPST-NO (1a) + SPST-NC (1b)

3. Contact Type
1: Single

4. Enclosure rating
4: Fully sealed
7: Flux protection

5. Terminal Shape
P: PCB terminals
Socket mounting Terminals

6. Contact Material
None: Standard (Ag-alloy (Cd free))
FD : AgSnIn Contacts
(Suitable for DC inductive load with high inrush current)

7. Approved Standards
US: UL/CSA

8. Mounting
None: Mounted directly to PCB
P6C : Mounted to Socket

■Application Examples

Ideal for output applications of control equipments

Downloaded from Arrow.com.

■Ordering Information

●Standard Models (UL, CSA certified)

Enclosure rating	Relay Function: Contact form	Relay Function: Terminals	Single-side stable: Model	Single-side stable: Rated coil voltage	Single-winding latching: Model	Single-winding latching: Rated coil voltage	Double-winding latching: Model	Double-winding latching: Rated coil voltage	Minimun packing unit
Flux protection	SPST-NO (1a)	Straight PCB	**G6C-1117P-US**	3 VDC	**G6CU-1117P-US**	3 VDC	**G6CK-1117P-US**	3 VDC	100 pcs/ tray
				5 VDC		5 VDC		5 VDC	
				6 VDC		–		6 VDC	
				12 VDC		12 VDC		12 VDC	
				24 VDC		24 VDC		24 VDC	
			G6C-1117P-FD-US	5 VDC	**G6CU-1117P-FD-US**	5 VDC	**G6CK-1117P-FD-US**	–	
				12 VDC		12 VDC		12 VDC	
				24 VDC		24 VDC		–	
	SPST-NO (1a) + SPST-NC (1b)	Straight PCB	**G6C-2117P-US**	3 VDC	**G6CU-2117P-US**	3 VDC	**G6CK-2117P-US**	3 VDC	
				5 VDC		5 VDC		5 VDC	
				6 VDC		6 VDC		6 VDC	
				12 VDC		12 VDC		12 VDC	
				24 VDC		24 VDC		24 VDC	
			G6C-2117P-FD-US	5 VDC	**G6CU-2117P-FD-US**	5 VDC	**G6CK-2117P-FD-US**	5 VDC	
				12 VDC		12 VDC		–	
				24 VDC		24 VDC		24 VDC	

Enclosure rating	Relay Function: Contact form	Relay Function: Terminals	Single-side stable: Model	Single-side stable: Rated coil voltage	Single-winding latching: Model	Single-winding latching: Rated coil voltage	Double-winding latching: Model	Double-winding latching: Rated coil voltage	Minimun packing unit
Fully sealed	SPST-NO (1a)	Straight PCB	**G6C-1114P-US**	3 VDC	**G6CU-1114P-US**	3 VDC	**G6CK-1114P-US**	3 VDC	100 pcs/ tray
				5 VDC		5 VDC		5 VDC	
				6 VDC		6 VDC		6 VDC	
				12 VDC		12 VDC		12 VDC	
				24 VDC		24 VDC		24 VDC	
			G6C-1114P-FD-US	5 VDC	**G6CU-1114P-FD-US**	5 VDC	**G6CK-1114P-FD-US**	5 VDC	
				12 VDC		12 VDC		12 VDC	
				24 VDC		24 VDC		24 VDC	
	SPST-NO (1a) + SPST-NC (1b)	Straight PCB	**G6C-2114P-US**	3 VDC	**G6CU-2114P-US**	3 VDC	**G6CK-2114P-US**	3 VDC	
				5 VDC		5 VDC		5 VDC	
				6 VDC		6 VDC		6 VDC	
				12 VDC		12 VDC		12 VDC	
				24 VDC		24 VDC		24 VDC	
			G6C-2114P-FD-US	5 VDC	**G6CU-2114P-FD-US**	5 VDC	**G6CK-2114P-FD-US**	–	
				12 VDC		12 VDC		–	
				24 VDC		24 VDC		24 VDC	

●Connecting Sockets (Sold Separately)

Applicable relays	Model	Minimun packing unit
G6C-2114P-US-P6C G6C-2117P-US-P6C G6C-1114P-US-P6C G6C-1117P-US-P6C G6CU-2114P-US-P6C G6CU-2117P-US-P6C G6CU-1114P-US-P6C G6CU-1117P-US-P6C	**P6C-06P**	20 pcs/tube
G6CK-2114P-US-P6C G6CK-2117P-US-P6C G6CK-1114P-US-P6C G6CK-1117P-US-P6C	**P6C-08P**	
Removal Tool	**P6B-Y1**	1
Hold-down Clips	**P6B-C2**	

Note 1. Use the G6C-□□□□P-US-P6C to mount to a P6C Socket.
2. When using by combining sockets, the rated current will be 5A due to its rated switching current.

Downloaded from Arrow.com.

■Ratings

Coil: 1-Pole, Single-side Stable Type

Item / Rated voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V) % of rated voltage	Must release voltage (V) % of rated voltage	Max. voltage (V) % of rated voltage	Power consumption (mW)
3 VDC	67	45	70% max.	10% min.	160% (at 23°C)	Approx. 200
5 VDC	40	125				
6 VDC	33.3	180				
12 VDC	16.7	720				
24 VDC	8.3	2,880				

Coil: Single-winding Latching Type

Item / Rated voltage	Rated current (mA)	Coil resistance (Ω)	Must set voltage (V) % of rated voltage	Must reset voltage (V) % of rated voltage	Max. voltage (V) % of rated voltage	Power consumption Set coil (mW)	Power consumption Reset coil (mW)
3 VDC	67	45	70% max.	70% max.	160% (at 23°C)	200	200
5 VDC	40	125					
6 VDC	33.3	180					
12 VDC	16.7	720					
24 VDC	8.3	2,880					

Coil: Double-winding Latching Type

Item / Rated voltage	Rated current (mA) Set coil	Rated current (mA) Reset coil	Coil resistance (Ω) Set coil	Coil resistance (Ω) Reset coil	Must set voltage (V) % of rated voltage	Must reset voltage (V) % of rated voltage	Max. voltage (V) % of rated voltage	Power consumption Set coil (mW)	Power consumption Reset coil (mW)
3 VDC	93.5	93.5	32.1	32.1	70% max.	70% max.	130% (at 23°C)	280	280
5 VDC	56.0	56.0	89.3	89.3					
6 VDC	46.7	46.7	129	129					
12 VDC	23.3	23.3	514	514					
24 VDC	11.7	11.7	2,056	2,056					

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. The operating characteristics are measured at a coil temperature of 23°C.
3. The “Max. voltage” is the maximum voltage that can be applied to the relay coil.

Contact

Item / Contact Form	SPST-NO (1a)		SPST-NO (1a) + SPST-NC (1b)	
Rated load	Resistive load	Inductive load (cosϕ = 0.4; L/R = 7 ms)	Resistive load	Inductive load (cosϕ = 0.4; L/R = 7 ms)
	10 A (8 A) at 250 VAC 10 A (10 A) at 30 VDC	5 A (5 A) at 250 VAC 5 A (5 A) at 30 VDC	8 A (8 A) at 250 VAC 8 A (8 A) at 30 VDC	3.5 A (3.5 A) at 250 VAC 3.5 A (3.5 A) at 30 VDC
Contact type	Single			
Contact material	Ag-Alloy (Cd free)			
Rated carry current	10 A (10 A)		8 A (8 A)	
Max. switching voltage	380 VAC, 125 VDC			
Max. switching current	10 A (10 A)		8 A (8 A)	

Note. The values shown in parentheses ( ) are for -FD models only.

Downloaded from Arrow.com.


■Characteristics (Including models for ultrasonically cleanable)

Item	Classification	Single-side Stable	Single-winding Latching	Double-winding Latching
Contact resistance *1		30 mΩ max.		
Operate (set) time		10 ms max.		
Release (reset) time		10 ms max.		
Min. set pulse width		–	20 ms (at 23°C)	
Min. reset pulse width		–	20 ms (at 23°C)	
Insulation resistance *2	Between coil and contacts	1,000 MΩ min.		
	Between contacts of the same polarity	1,000 MΩ min.		
	Between contacts of different polarity	1,000 MΩ min. (SPST-NO, SPST-NC)		
	Between set and reset coils	–	–	1,000 MΩ min.
Dielectric strength	Between coil and contacts	2,000 VAC 50/60Hz for 1min		
	Between contacts of the same polarity	1,000 VAC 50/60Hz for 1min		
	Between contacts of different polarity	2,000 VAC 50/60Hz for 1min (SPST-NO, SPST-NC)		
	Between set and reset coils	–	–	250 VAC 50/60Hz for 1min
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)		
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)		
Shock resistance	Destruction	1,000 m/s²		
	Malfunction	100 m/s²		
Durability	Mechanical	50,000,000 operations min. (at 18,000 operations/hr)		
	Electrical	100,000 operation min. (at 1,800 operations/hr under rated load)		
Failure rate (P level) (reference value) *3		10 mA at 5 VDC		
Ambient operating temperature		-25°C to 70°C (with no icing or condensation)		
Ambient operating humidity		5% to 85%		
Weight		Approx. 5.6 g		


Note. The given values are initial values.
*1. Measurement conditions: 5 VDC, 1 A, voltage drop method.
*2. Testing conditions: measured with a 500 VDC megohmmeter (at 250 VDC between set/reset coil).
*3. This value was measured at a switching frequency of 120 operations/min.

■Engineering Data


Maximum Switching Capacity G6C-1114□-US G6C-1117□-US

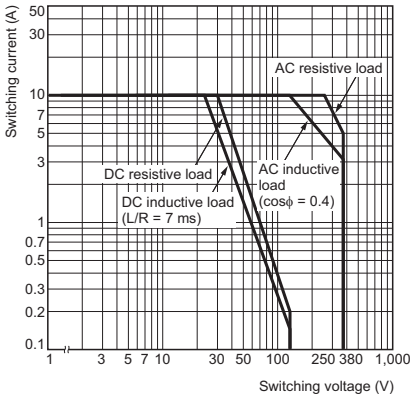


Maximum Switching Capacity G6C-2114□-US G6C-2117□-US

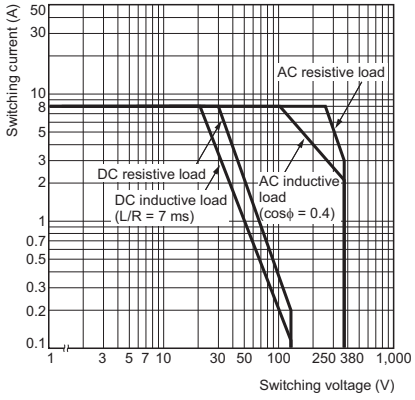


Durability G6C-1114□-US, G6C-2114□-US G6C-1117□-US, G6C-2117□-US

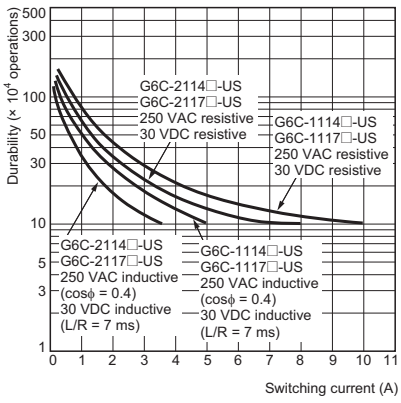


Maximum Switching Capacity G6C-1114□-FD-US G6C-1117□-FD-US

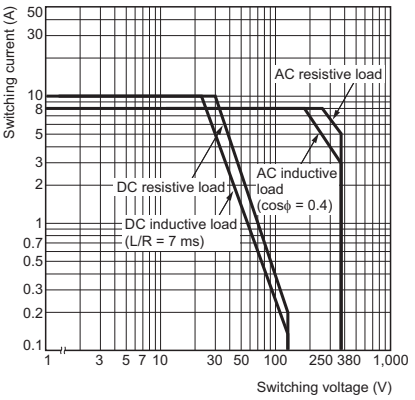

Maximum Switching Capacity G6C-2114□-FD-US G6C-2117□-FD-US

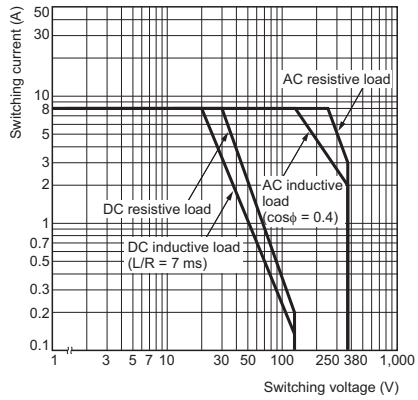


Durability G6C-1114□-FD-US, G6C-2114□-FD-US G6C-1117□-FD-US, G6C-2117□-FD-US

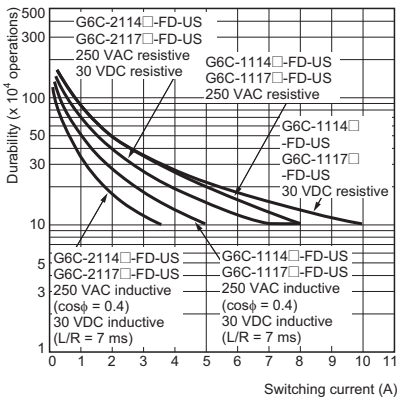


Downloaded from Arrow.com.

Ambient Temperature vs. Maximum Coil Voltage G6C(U)-☐114P(-FD)-US G6C(U)-☐117P(-FD)-US

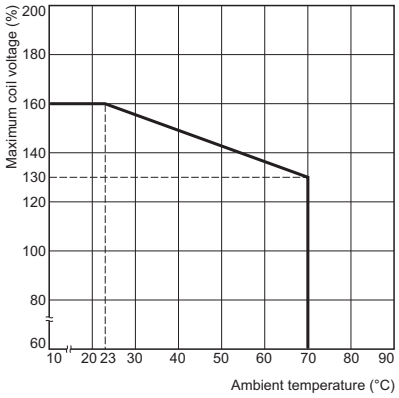


Note. The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Ambient Temperature vs. Maximum Coil Voltage G6C-☐114P(-FD)-US

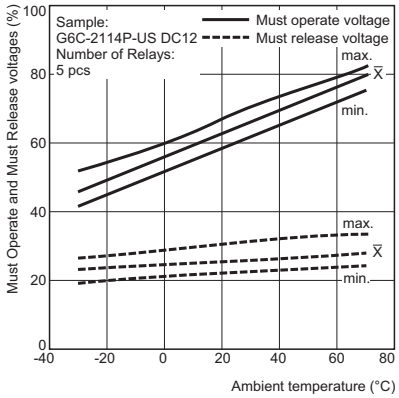


Shock Malfunction G6C-☐114P(-FD)-US

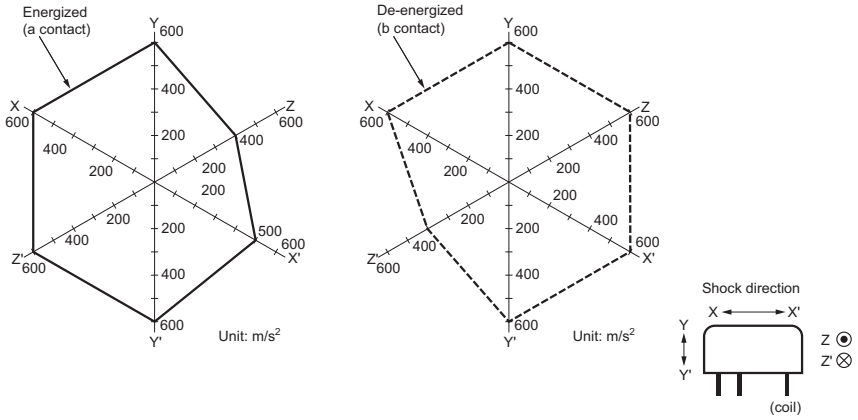

Sample: G6C-2114P-US DC24V
Number of Relays: 6 pcs
Test conditions: Shock is applied in ±X, ±Y, and ±Z directions three times each with without energizing the Relays to check the number of malfunctions.
Requirement: 100 m/s²

Magnetic Interference (between Relays)

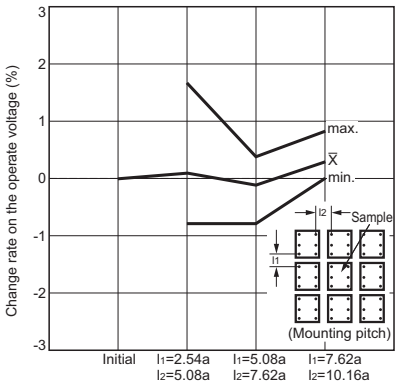



G6C

Downloaded from Arrow.com.

■Dimensions

Flux Protection Model
G6C-□117P (-FD) -US




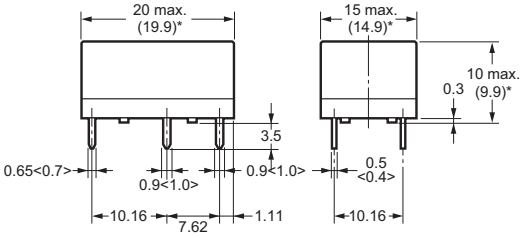


* Average value


Dimensions in pointed brackets < > are for the Relay mounted to Socket (-P6C).


PCB Mounting Holes
(Bottom View)
Tolerance: ±0.1

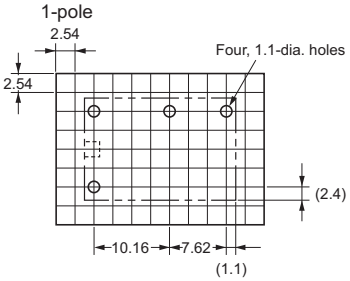

Terminal Arrangement/ Internal Connections
(Bottom View)




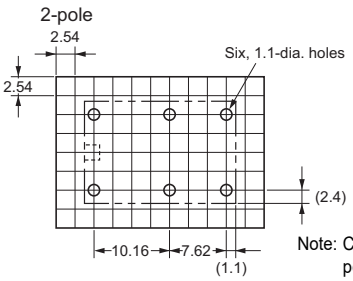




Note: Check carefully the coil polarity of the Relay.

Fully Sealed Model
G6C-□114P (-FD) -US




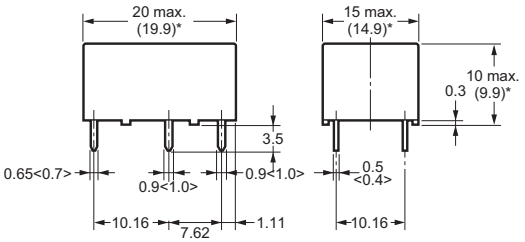


* Average value

Dimensions in pointed brackets < > are for the Relay mounted to Socket (-P6C).


PCB Mounting Holes
1-pole (Bottom View)
Tolerance: ±0.1

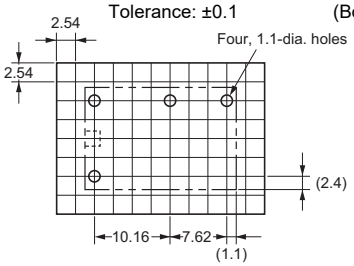


Terminal Arrangement/ Internal Connections
(Bottom View)



2-pole

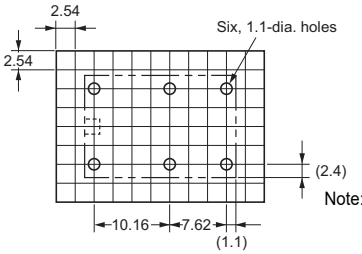





Note: Check carefully the coil polarity of the Relay.

Note: Orientation marks are indicated as follows: ⬚ ▨

Downloaded from Arrow.com.

Flux Protective
Single-winding Latching Model
G6CU-□117P (-FD) -US




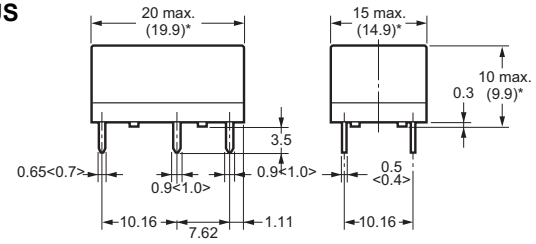


* Average value


Dimensions in pointed brackets < > are for the Relay mounted to Socket (-P6C).

PCB Mounting Holes (Bottom View) Tolerance: ±0.1

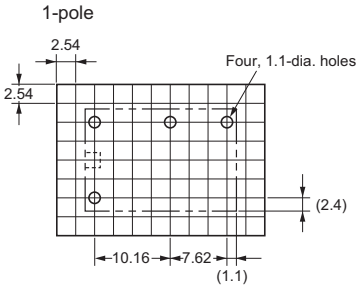


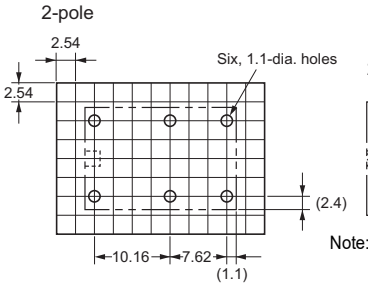

Terminal Arrangement/ Internal Connections (Bottom View)





S: Set coil
R: Reset coil



Note: Check carefully the coil polarity of the Relay.

Fully Sealed Model
Single Latching Models
G6CU-□114P (-FD) -US




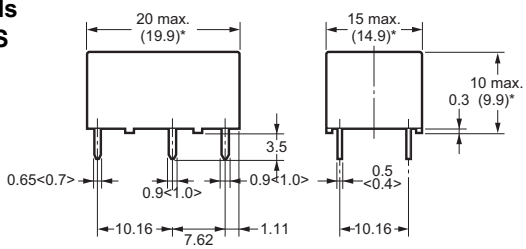


* Average value


Dimensions in pointed brackets < > are for the Relay mounted to Socket (-P6C).

PCB Mounting Holes (Bottom View) Tolerance: ±0.1

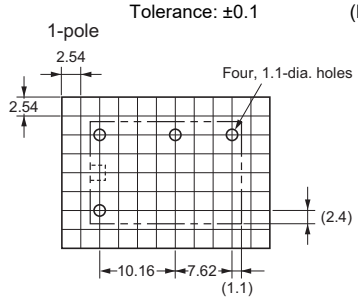


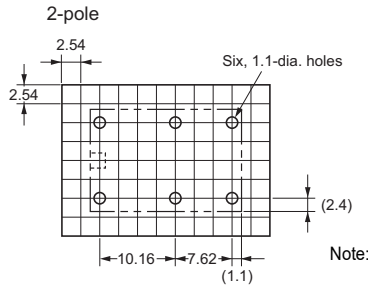

Terminal Arrangement/ Internal Connections (Bottom View)



S: Set coil
R: Reset coil





Note: Check carefully the coil polarity of the Relay.

Note: Orientation marks are indicated as follows: ⬚ ▨

Downloaded from Arrow.com.

Flux Protective
Double-winding Latching Model
G6CK-□117P (-FD) -US




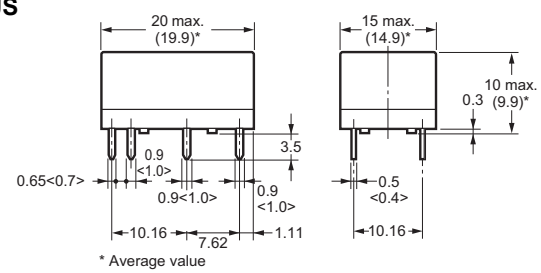


* Average value

Dimensions in pointed brackets < > are for the Relay mounted to Socket (-P6C).


PCB Mounting Holes
(Bottom View)
Tolerance: ±0.1




Terminal Arrangement/ Internal Connections
(Bottom View)




S: Set coil
R: Reset coil

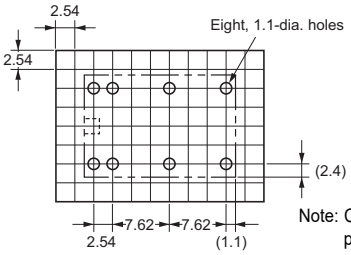




Note: Check carefully the coil polarity of the Relay.

Fully Sealed
Double-winding Latching Model
G6CK-□114P (-FD) -US




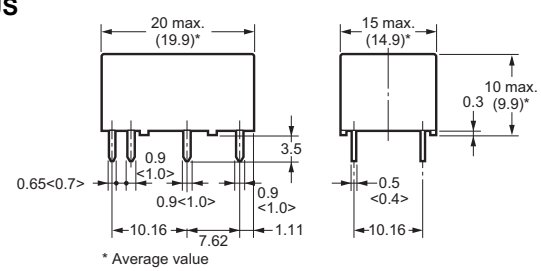


* Average value

Dimensions in pointed brackets < > are for the Relay mounted to Socket (-P6C).


PCB Mounting Holes
(Bottom View)
Tolerance: ±0.1




Terminal Arrangement/ Internal Connections
(Bottom View)



S: Set coil
R: Reset coil

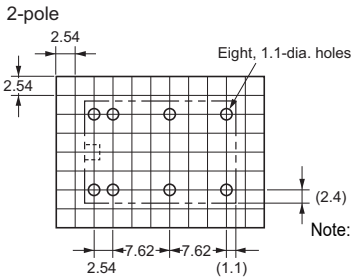



Note: Check carefully the coil polarity of the Relay.


Note: Orientation marks are indicated as follows: ⬚ ▨


Downloaded from Arrow.com.


■Connecting Sockets Dimensions

Socket for single-winding latching/single-side a table Models

P6C-06P




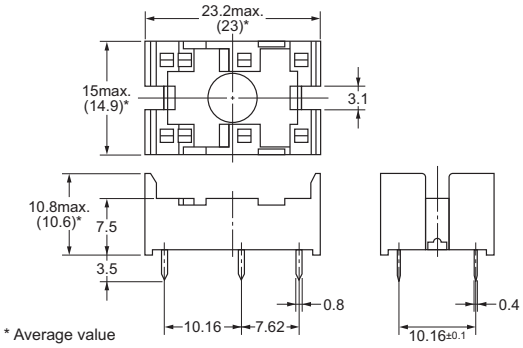


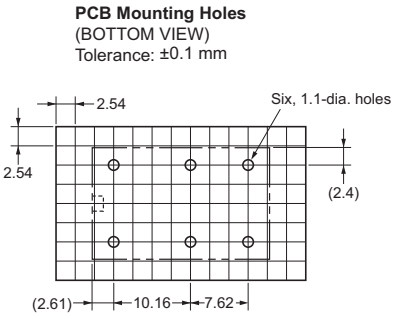


Socket for double-winding latching Models

P6C-08P



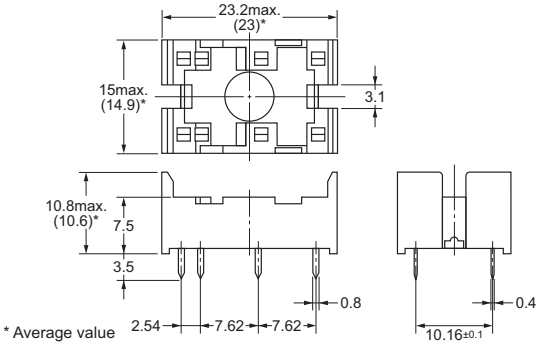

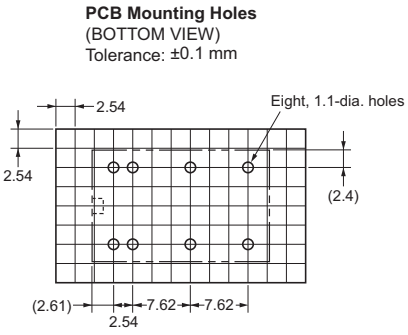


Note: Orientation marks are indicated as follows:

Downloaded from Arrow.com.


■Removal Tool

P6B-Y1



■Hold-down Clips

P6B-C2



■Approved Standards

●The rated values approved by each of the safety standards may be different from the performance characteristics individually defined in this catalog.

UL Recognized (File No.E41643)

CSA Certified (File No.LR31928)

Model	Number of poles	Coil ratings	Contact ratings	Number of test operations
G6C ( )	1	3 to 24 VDC	10 A, 250 VAC (General use) 80°C 10 A, 30 VDC (Resistive) 80°C 1/6 HP 125 VAC, 1/4 HP, 125 VAC 80°C 1/3 HP 250 VAC, 1/4 HP, 250 VAC 80°C 600 W, 120 VAC, (Tungsten) 80°C (excluding -FD Models)	6,000
			530 VA, 20 to 265 VAC Max 2A (Pilot Duty) 80°C 43.2 VA, 30 VDC (Pilot Duty) 80°C	6,000
			12 LRA, 2.2 FLA, 30 VDC 80°C	30,000 1,000 (-FD Models)
	2		8 A, 250 VAC (General use) 80°C 8 A, 30 VDC (Resistive) 80°C 1/6 HP 125 VAC, 1/4 HP, 125 VAC 80°C 1/3 HP 250 VAC, 1/4 HP, 250 VAC 80°C 600 W, 120 VAC, (Tungsten) 80°C (excluding -FD Models)	6,000
			530 VA, 20 to 265 VAC Max 2A (Pilot Duty) 80°C 43.2 VA, 30 VDC (Pilot Duty) 80°C	6,000
			12 LRA, 2.2 FLA, 30 VDC 80°C	30,000 1,000 (-FD Models)

EN/IEC, VDE Certified (Certificate No. 40014439)

Model	Number of poles	Coil ratings	Contact ratings	Approved switching operations
G6C ( )	1	3, 5, 6, 12, 24 VDC	10 A, 250 VAC (cosϕ = 1) 40°C 5 A, 250 VAC (cosϕ = 0.4) 40°C	20,000
	2	• Single-stable: 3, 5, 6, 12, 24 VDC	7 A, 250 VAC (cosϕ = 1) 40°C 3.5 A, 250 VAC (cosϕ = 0.4) 40°C	

EN/IEC, TÜV Certified (Certificate No.R 50158249)

Model	Number of poles	Coil ratings	Contact ratings	Approved switching operations
G6C ( )	1	• Single-stable: 3, 5, 6, 12, 24 VDC	10 A, 250 VAC (cosϕ = 1) 40°C 5 A, 250 VAC (cosϕ = 0.4) 40°C 10 A, 30 VDC (L/R = 0 ms) 40°C	20,000
	2	• Latching: 3, 5, 6, 12, 24 VDC	8 A, 250 VAC (cosϕ = 1) 40°C 3.5 A, 250 VAC (cosϕ = 0.4) 40°C 8 A, 30 VDC (L/R = 0 ms) 40°C	

Downloaded from Arrow.com.


■Precautions

●Please refer to “PCB Relays Common Precautions” for correct use.


Correct Use

●Mounting

- Do not reverse the polarity of the coil (+, –).
- When mounting more than two relays side by side, keep the gap between Relays as shown below to ensure a good heat dissipation. It may result in malfunction if heat is not dissipated smoothly from the Relay.




●Sockets



- When mounting the Relay, make sure to insert the Relay terminals perpendicularly and correctly into the socket contact pin.
- Hold-down clips (for mounting and removal) are also available.
- The P6C model has a flux-resistant construction. Do not wash it down with water.
- The max. carry current of sockets is 5A.
- Not applicable to the self-clinching type.

●Double-winding Latching Circuit

- It is recommended to perform wiring of No.1 and No.2 of the negative (-) terminal as COM wiring, in order to improve the operation stability for Double-winding Latching.



●Using SPDT contact of the SPST-NO+SPST-NC Relay

- Do not construct a circuit so that overcurrent and burning occur if the NO, NC and SPDT contacts are short-circuited with the SPST-NO+SPST-NC Relay. Arcing may generate short-circuiting between contacts if there is short-circuiting because of conversion to the MBB contact caused by asynchronous operation of the NO and NC contacts, the interval between the NO and NC contacts is small, or a large current is left open.

●Other precautions

- This Relay is a Power Relay which is suitable for power load switching. Do not use the G6C for signal purposes such as micro load switching under 10 mA.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us
Asia-Pacific
https://components.omron.com/ap
Korea
https://components.omron.com/kr
Europe
https://components.omron.com/eu
China
https://components.omron.com.cn
Japan
https://components.omron.com/jp

© OMRON Corporation 2007-2026 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K018-E1-13
0326 (0207)

Downloaded from Arrow.com.