

Compact, Industry-Standard 2-pole relay, designed to switch 2A Signal Loads.

- Long terminals for ideal for soldering and mounting reliability. (Surface mounting terminal models)
- Space-saving inside-L terminal. (Surface mounting terminal models)
- Unique terminal structure, designed to withstand IRS soldering processes. (Surface mounting terminal models)
- High dielectric strength (2,000 VAC) and impulse withstand voltage between coil and contacts (2,500 V, 2 \times 10 μs : Telcordia requirements).
- \bullet Ultra-miniature at 9.4 mm (H) \times 7.5 mm (W) \times 15 mm (L).
- Models available with BSI (EN62368-1) supplementary insulation certification. (-Y type)



G6S<u>--</u>-<u>-</u>-

- 1 2 3 4
- 1. Relay Function
- None : Single-side stable
 - U : Single-winding latching
 - K : Double-winding latching

2. Number of poles/ Contact form

2: 2-pole/DPDT (2c)

■Ordering Information

Surface mounting terminal standard models

- 3. Terminal Shape
- None : PCB terminals
 - F : Outside-L surface mounting terminalsG : Inside-L surface mounting terminals

4. Approved Standards

None : UL, CSA

Y : UL, CSA, BSI (EN62368-1)

Application Examples

- Telecommunication equipment
- Measurement devices
- Office automation machines
- Audio-visual products.
- Security equipment
- Building automation equipment
- Industrial equipment
- Amusement equipment
- Home appliances

		Packing	Tube Packing			Tape Packing			
Enclosure rating	Relay Function	Contact form	Model	Rated coil voltage	Minimum packing unit	Model	Rated coil voltage	Minimum packing unit	Minimum ordering unit (tape packing)
				3 VDC			3 VDC		
				4.5 VDC			4.5 VDC		
			G6S-2F G6S-2G	5 VDC		G6S-2F-TR G6S-2G-TR	5 VDC		
	Single-side		665-26	12 VDC		003-20-Th	12 VDC	400 pcs/reel	800 pcs/2 reels
	stable			24 VDC			24 VDC		
				5 VDC			5 VDC		
		DPDT (2c)	G6S-2F-Y G6S-2G-Y	12 VDC		G6S-2F-Y-TR G6S-2G-Y-TR G6SU-2F-TR G6SU-2G-TR G6SU-2G-Y-TR G6SU-2G-Y-TR	12 VDC		
_			G65-2G-1	24 VDC			24 VDC		
	Single-winding		G6SU-2F G6SU-2G	3 VDC			3 VDC		
				4.5 VDC	50 ncc/tube		4.5 VDC		
Fully sealed				5 VDC			5 VDC		
				12 VDC			12 VDC		
	latching			24 VDC			24 VDC		
				5 VDC			5 VDC		
			G6SU-2F-Y G6SU-2G-Y	12 VDC			12 VDC		
			0000-20-1	24 VDC			24 VDC		
				3 VDC			3 VDC		
	Devilate ordered		00014 05	4.5 VDC	-	G6SK-2F-TR G6SK-2G-TR	4.5 VDC		
	Double-winding latching		G6SK-2F G6SK-2G	5 VDC			5 VDC		
10	latorning		00000 20	12 VDC			12 VDC		
				24 VDC			24 VDC]	

Note 1. When ordering, add the rated coil voltage to the model number.

Example: G6S-2F DC3

However, the notation of the coil voltage on the product case as well as on the packing will be marked as U VDC.

Note 2.When ordering tape packing, add -TR" to the model number.

Be sure since -TR" is n ot part of the relay model number, it is not marked on the relay case.

Note 3. When ordering tape packing, minimum order unit is 2 reels (400 pcs \times 2 = 800 pcs).

Note 4.Surface mounting terminal (SMT) standard models are shipped in moisture-proof package.

●PCB Terminal Standard Models

Enclosure	Relay Function	Single-side stable		Single-wind	ding latching	Double-win	Minimum packing unit	
rating Contact form	Model	Rated coil voltage Model		Rated coil voltage	Model	Rated coil voltage		
			3 VDC		3 VDC	G6SK-2	3 VDC	50 pcs/tube
			4.5 VDC	G6SU-2	4.5 VDC		4.5 VDC	
		G6S-2	5 VDC		5 VDC		5 VDC	
Fully sealed			12 VDC		12 VDC		12 VDC	
Fully sealed	DFD1 (20)		24 VDC		24 VDC		24 VDC	
			5 VDC		5 VDC			
	G6S-2-Y	12 VDC	G6SU-2-Y	12 VDC	-	-		
			24 VDC		24 VDC			

Note 1. When ordering, add the rated coil voltage to the model number.

Example: G6S-2 DC3

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as DDVDC.

Note 2.PCB terminal standard types do not require moisture proof packaging and therefore shipped in non-moisture-proof package.

Ratings

•Single-side Stable Model

Model	Rated	Item voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
		3	46.7	64.3	75% max.		200%	Approx. 140
000 0	DC	4.5	31	145				
G6S-2 G6S-2F G6S-2G		5	28.1	178		10% min.	(at 23°C)	
		12	11.7	1,028		10 /0 11111		
		24	8.3	2,880			170% (at 23°C)	Approx. 200
G6S-2-Y	DC	5	40	125			170% (at 23°C)	Approx. 200
G6S-2F-Y		12	16.7	720	75% max.	10% min.		Approx. 200
G6S-2G-Y		24	9.6	2,504	t		(41.20.0)	Approx. 230

Contacts

Item Load	Resistive load		
Contact type	Bifurcated crossbar		
Contact material	Ag (Au-Alloy)		
Rated load	0.5 A at 125 VAC; 2 A at 30 VDC		
Rated carry current	2 A		
Max. switching voltage	250 VAC, 220 VDC		
Max. switching current	2 A		

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%. 2. Operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the relay coil.

Single-winding Latching Model

Model	Rated	Item voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
		3	33.3	90	75% max.	75% max.	180% (at 23°C)	
G6SU-2	DC	4.5	22.2	203				Approx. 100
G6SU-2F		5	20	250				
G6SU-2G		12	8.3	1,440				
		24	6.3	3,840				Approx. 150
G6SU-2-Y		5	28.1	178			0000/	
G6SU-2F-Y	DC	12	11.7	1,028	75% max.	75% max.	200% (at 23°C)	Approx. 140
G6SU-2G-Y		24	5.8	4,114			(0.20 0)	

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%. 2. Operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the relay coil.

Double-winding Latching Model

Model	Rated	Item voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
	DC	3	66.6	45	75% max.			Approx. 200
G6SK-2		4.5	44.4	101			170%	
G6SK-2 G6SK-2F		5	40	125		75% max.	(at 23°C) 140% (at 23°C)	
G6SK-2G		12	16.7	720		rovo max.		
		24	12.5	1,920				Approx. 300

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%. 2. Operating characteristics are measured at a coil temperature of 23°C.

3. The maximum voltage is the highest voltage that can be imposed on the relay coil.

Characteristics

Item	Relay Function	Single-side Stable G6S-2, G6S-2F, G6S-2G	Single-winding Latching G6SU-2, G6SU-2F, G6SU-2G	Double-winding Latching G6SK-2, G6SK-2F, G6SK-2G	Single-side Stable G6S-2F-Y, G6S-2G-Y, G6S-2-Y	Single-winding Latching G6SU-2-Y, G6SU-2F-Y, G6SU-2G-Y			
Contact re			75 mΩ max.						
Operate (s	,			4 ms max.					
Release (r	,			4 ms max.					
	set pulse width	-		ms	-	10 ms			
Insulation	resistance *2		1,0	$000 \text{ M}\Omega$ min. (at 500 VD	C)				
	Between coil and contacts	2,000 VAC, 50/	60 Hz for 1 min	1,000 VAC, 50/60 Hz for 1 min	2,000 VAC, 50/60 Hz for 1 min				
Dielectric	Between contacts of different polarity		1,5	00 VAC, 50/60 Hz for 1 i	nin				
strength	Between contacts of the same polarity		1,0	00 VAC, 50/60 Hz for 1 r	nin				
	Between set and reset coil	-	-	500 VAC, 50/60 Hz for 1 min	-				
Insulation distance	Between coil and contacts	Cleara	nce: 1 mm, Creepage:	1.5 mm	Clearance: 2 mm, Creepage: 2 mm				
Impulse	Between coil and contacts	2,500 V (2 \times 10 μs); 1,500 V (10 \times 160 μs)		1,500 V (10 × 160 μs)	2,500 V (2 × 10 μs); 1,500 V (10 × 160 μs)				
withstand voltage	Between contacts of different polarity		2,500 V ((2 × 10 μs); 1,500 V (10 × 160 μs)					
voltage	Between contacts of the same polarity	1,500 V (10 × 160 μs)							
Vibration	Destruction	10 to 55 to 10 Hz, 2.5 mm single amplitude (5 mm double amplitude)							
resistance	Malfunction	10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude)							
Shock	Destruction	1,000 m/s ²							
resistance	Malfunction	750 m/s ²							
	Mechanical	100,000,000 operations min. (at 36,000 operations/hr)							
Durability Electrical		100,000 operations min. for AC (at 1,800 operations/h with rated load) 100,000 operations min. for DC (at 1,200 operations/h with rated load)							
Failure rate (P level) (reference value) *3		10 μA at 10 m VDC							
Ambient operating temperature		-40°C to 85°C (with no icing or condensation), and -40°C to 70°C (with no icing or condensation) only for double-winding latching 24 VDC and -Y type 24 VDC							
Ambient of	perating humidity	5% to 85%							
Weight		Approx. 2 g							

Note: The above values are initial values.


The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method. *1.

*2. The insulation resistance was measured with a 500 VDC megohmmeter applied to the same parts as those used for checking the dielectric strength (except between the set and reset coil). This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 50 Ω . This value may vary, depending on


*3. switching frequency, operating conditions, expected reliability level of the relay, etc. It is always recommended to double-check relay suitability under actual load conditions.

Engineering Data


Maximum Switching Capacity




Ourability G6S-2F(G)



Ambient Temperature vs. Maximum Voltage (Single-side Stable)




Ambient Temperature vs. Maximum Voltage (Latching)




Note: "Maximum voltage" is the maximum voltage that can be applied to the Relay coil.


Ambient Temperature vs. Switching Current (Single-side Stable)




Ambient Temperature vs. Switching Current (Latching)



Ambient Temperature vs. Must Operate or Must **Release Voltage** G6S-2F(G)




Shock Malfunction G6S-2F(G)




Conditions: Shock is applied in ±X, ±Y, and ±Z directions three times each with and without energizing the Relavs to check the number of contact malfunctions.

Electrical Endurance (with Must Operate and Must Release Voltage) *1 G6S-2F(G)




Contact Reliability Test (Contact Resistance) *1, *2 G6S-2F(G)




Operating frequency (×10³ operations)


G 6 S




Mutual Magnetic Interference G6S-2F(G)




•Electrical Endurance (Contact Resistance) *1 G6S-2F(G)




Electrical Endurance (with Must Operate and Must Release Voltage) *1 G6S-2F(G)




Must Operate and Must **Release Time Distribution *1** G6S-2F(G)



Electrical Endurance (Contact Resistance) *1 G6S-2F(G)




Distribution of Bounce Time *1 G6S-2F(G)




(Average value)


s 🔲 N s 📮 N Sample: G6S-2F Number of Relays:10 pcs Must operate Must release 800 1,200 -30 400


High-frequency Characteristics (Insertion Loss) *1, *3 G6S-2F(G) (Average value (initial))



(Average value)








The tests were conducted at an ambient temperature of 23°C. *1.


- *2. The contact resistance data are periodically measured reference values and are not values from each monitoring operation. Contact resistance values will vary
- according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use. *3. High-frequency characteristics, depend on the PCB to which the Relay is mounted. Always check these characteristics, including durability, in the actual machine before use.


External Magnetic Interference


G6S-2F(G) (Average value)



High-frequency Characteristics (Isolation) *1. *2 G6S-2F(G) (Average value (initial))








External magnetic field (A/m)


High-frequency Characteristics


G6S-2F(G) (Average value (initial))





G6S

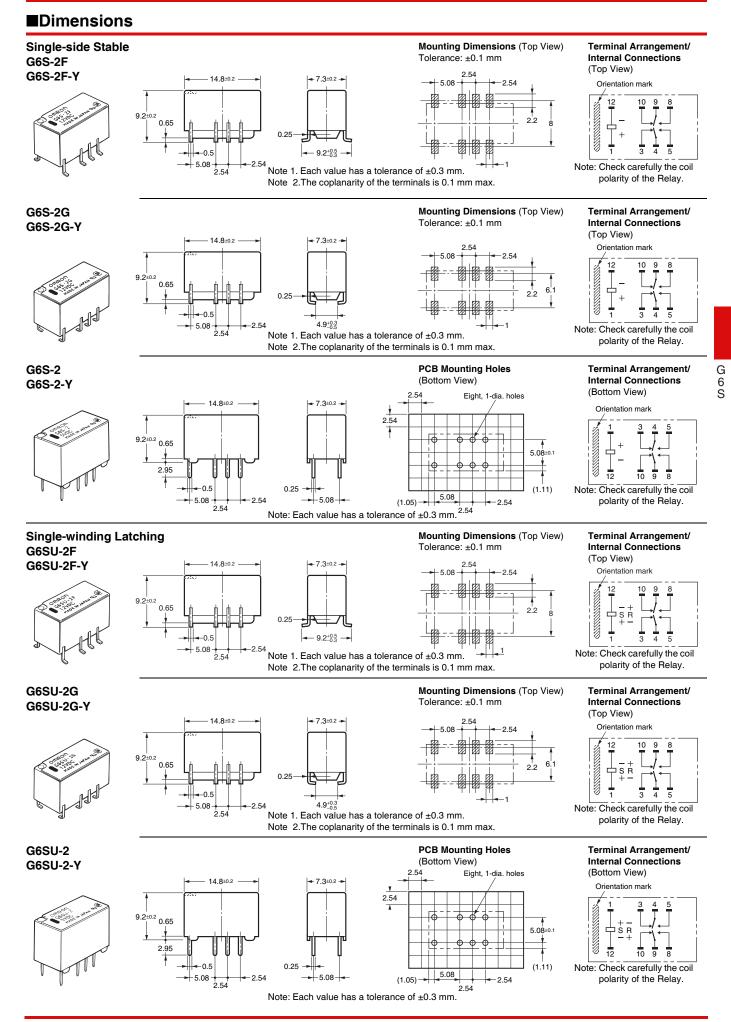

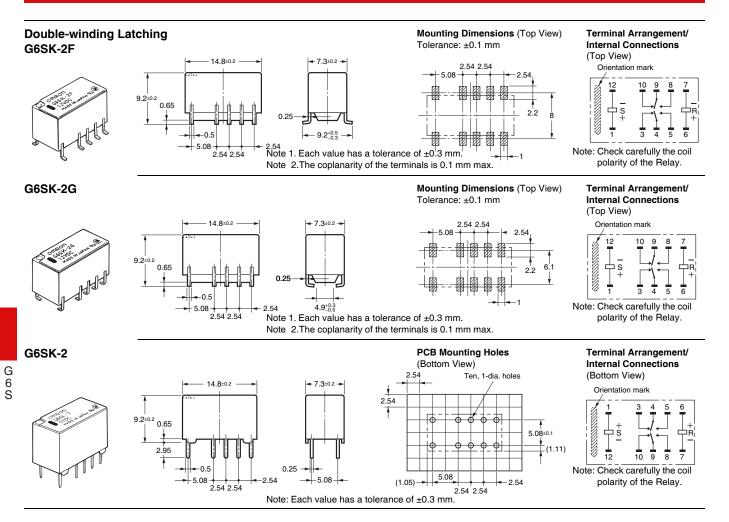

Tube Packing and Tape Packing


Surface mounting terminal (SMT) standard models are shipped in moisture-proof package, and PCB terminal standard types do not require moisture proof packaging and therefore shipped in non-moisture-proof package.

Please refer to "Correct Use" for handling after opening moisture-proof packaging for Surface mounting terminal (SMT) models.

(1) Tube Packing

• Relays in tube packing are arranged so that the orientation mark of each Relay in on the left side.

Be sure not to make mistakes in Relay orientation when mounting the Relay to the PCB.



Tube length: 772 mm (stopper not included) No. of Relays per tube: 50 pcs


(2) Tape Packing (Surface Mounting Terminal Models)


• When ordering Relays in tape packing, add the prefix "-TR" to the model number, otherwise the Relays in tube packing will be provided.

Relays per Reel: 400 pcs


Minimum packing unit: 2 reels (800 pcs)

1. Direction of Relay Insertion

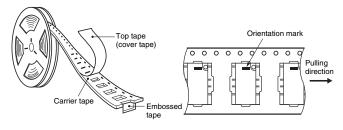




3. Carrie Tape Dimensions G6S-2F(-Y), G6SU-2F, G6SK-2F

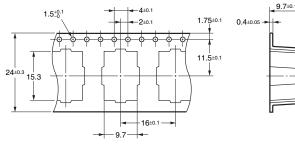


G6S-2G(-Y), G6SU-2G, G6SK-2G

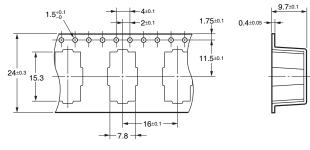

G 6 S


Recommended Soldering Method

(1) IRS Method (Mounting Solder: Lead)



(The temperature profile indicates the temperature on the circuit board surface.)

(2) IRS Method (Mounting Solder: Lead-free)



(The temperature profile indicates the temperature on the PCB.)


Approved Standards

UL recognized: A) (File No. E41515) CSA certified: (File No. LR31928)

Contact form	Coil ratings	Contact ratings		Number of test operations
DPDT (2c)	3 to 24 VDC	3 A, 30 VDC at 40°C 0.3 A, 110 VDC at 40°C 0.5 A, 125 VAC at 40°C		6,000
BSI (EN623	(-Y type)			
Contact form	Isolation category			Voltage

BSI (EN623	68-1) (File No.VC657351)	(-Y type)
Contact form	Isolation category	Voltage
DPDT (2c)	Supplementary Insulation	250 VAC

- The thickness of cream solder to be applied should be within a range between 150 and 200 µm on OMRON's recommended PCB pattern.
- . In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left side.

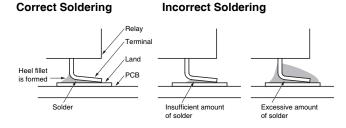

Visually check that the Relay is properly soldered.

Precautions

· Please refer to "PCB Relays Common Precautions" for correct use.

Correct Use

- Long-term Continuously ON Contacts
- . Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend using a fail-safe circuit design that provides protection against contact failure or coil burnout.
- Relay Handling
- . Use the Relay as soon as possible after opening the moistureproof package. (As a guideline, use the Relay within one week at 30°C or less and 60% RH or less.) If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.
- When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.
- Claw Securing Force During Automatic Mounting

Surface-mounting Relay

G6S

• During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.



Dimension A: 1.96 N max. Dimension B: 4.90 N max. Dimension C: 1.96 N max.

Please check each region's Terms & Conditions by region website.

OMRON Corporation Device & Module Solutions Company

Regional Contact Americas https://components.omron.com/us Asia-Pacific https://components.omron.com/ap Korea https://components.omron.com/kr

Europe https://components.omron.com/eu China https://components.omron.com.cn Japan https://components.omron.com/jp

© OMRON Corporation 2007-2022 All Rights Reserved.

In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K093-E1-14 1122 (0207)