

1605602

https://www.phoenixcontact.com/us/products/1605602

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable connector, straight short, Screw locking mechanism, M23, number of positions: 4+3+PE, contact connection type: Socket, shielded: yes, degree of protection: IP67, cable diameter range: 7.5 mm ... 14 mm, number of positions: 8, connection method: Crimp connection, series: SF, this item is expected to be lead-free from Q1 2027 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Your advantages

- Consistent EMC protection for reliable connection solutions in the industrial environment
- · Crimping connection: vibration- and temperature-resistant assembly
- Flexible use: reliably connect cable diameters of 7.5 mm ... 14 mm
- · Molded designs with preassembled cables on one or both sides

Commercial data

| Item number | 1605602 |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB32 |
| Product key | ABRBFA |
| GTIN | 4046356182232 |
| Weight per piece (including packing) | 136.4 g |
| Weight per piece (excluding packing) | 118.74 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |



https://www.phoenixcontact.com/us/products/1605602



Technical data

Notes

| Order information: | Order crimp contacts 4 x Ø 1 mm, 4 x Ø 2 mm separately |
|---------------------|--|
| Note on application | Series SF connectors are not compatible with series M23 PRO and must not be combined. |
| fety note | |
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. |
| | WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. |
| | WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |
| | The products are suitable for applications in plant, controller, and electrical device engineering. |
| | When operating the connectors in outdoor applications, they must be separately protected against environmental influences. |
| | Assembled products may not be manipulated or improperly opened. |
| | Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). |
| | When using the product in direct connection with third-party manufacturers, the user is responsible. |
| | For operating voltages > 50 V AC, conductive connector housings must be grounded |
| | Ensure that the protective or functional ground has been properly connected. |
| | VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector |
| | Only use tools recommended by Phoenix Contact |
| | The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product. |
| | Operate the connector only when it is fully plugged in and interlocked. |
| | Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. |
| | Observe the minimum bending radius of the cable. Lay the cable without twisting it. |
| | The connector warms up in normal operation. Depending on th |



1605602

https://www.phoenixcontact.com/us/products/1605602

| | ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12). |
|---|---|
| Product properties | |
| Product type | Circular connector (cable-side) |
| Series | SF |
| Application | Power |
| Number of positions | 8 |
| Connection profile | 4+3+PE |
| Shielded | yes |
| Coding | N |
| Thread type | M23 |
| Material specifications | |
| Seal material | FPM |
| Housing material | Metal |
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD- |
| | Zn) |
| Insulator material | PA 6.6 |
| Gasket and O-ring material | FPM |
| Conductor connection Connection method | Crimp connection |
| Electrical properties | |
| | |
| | |
| Contact | |
| Contact Contact diameter | 2 mm |
| Contact Contact diameter Max. current | 30 A |
| Contact Contact diameter Max. current Nominal current I _N | 30 A 30 A |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N | 30 A 30 A 630 V |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category | 30 A 30 A 630 V III |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution | 30 A 30 A 630 V III 3 |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category | 30 A 30 A 630 V III |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution | 30 A 30 A 630 V III 3 |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution Rated surge voltage | 30 A 30 A 630 V III 3 |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution Rated surge voltage Contact | 30 A 30 A 630 V III 3 6 kV |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution Rated surge voltage Contact Contact diameter | 30 A 30 A 630 V III 3 6 kV |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution Rated surge voltage Contact Contact diameter Max. current | 30 A 30 A 630 V III 3 6 kV |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution Rated surge voltage Contact Contact diameter Max. current Nominal current I _N | 30 A 30 A 630 V III 3 6 kV 1 mm 9 A 9 A |
| Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N Overvoltage category Degree of pollution Rated surge voltage Contact Contact diameter Max. current Nominal current I _N Nominal voltage U _N | 30 A 30 A 630 V III 3 6 kV 1 mm 9 A 9 A 250 V |



1605602

https://www.phoenixcontact.com/us/products/1605602

Connector

| Туре | straight short | | |
|-------------------|-----------------|--|--|
| Connection 1 | | | |
| Head design | Socket | | |
| Head cable outlet | straight, short | | |
| Head thread type | M23 | | |

Cable/line

| External cable diameter | 7.5 mm 14 mm | |
|-------------------------|--------------|--|

Environmental and real-life conditions

Ambient conditions

| Degree of protection | IP67 |
|--|---------------|
| Ambient temperature (operation) | -40 °C 125 °C |
| Altitude | 3000 m |
| Permissible humidity (storage/transport) | 50 % 65 % |




https://www.phoenixcontact.com/us/products/1605602




Drawings

Dimensional drawing

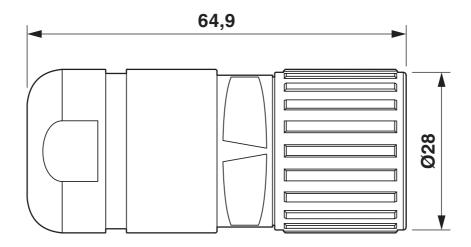

Dimensional drawing

Schematic diagram

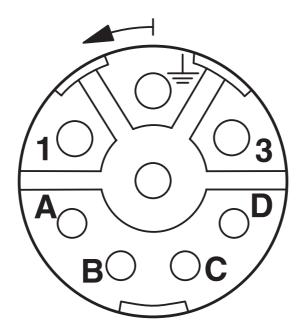


Connector pin assignment



1605602

https://www.phoenixcontact.com/us/products/1605602

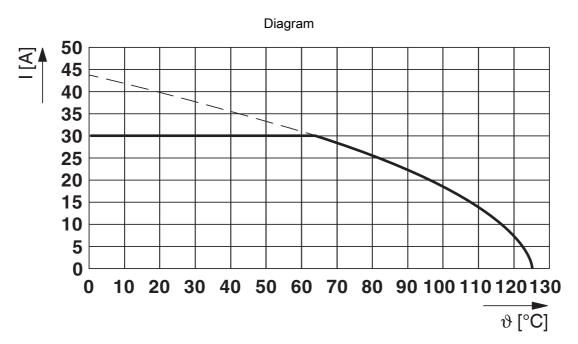

I = current strength, T = ambient temperature



1605602

https://www.phoenixcontact.com/us/products/1605602

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1605602

| . 9 1 | cUL Recognized Approval ID: E153698-20041116 | | | | |
|--------------|--|--------------------------------|--------------------------------|-------------------|-------------------------------|
| | | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| keine | | | | | |
| | | 600 V | 18 A | 12 | - |

| 7. | UL Recognized Approval ID: E153698-20041116 | | | | |
|-----------|---|--------------------------------|--------------------------------|-------------------|-------------------------------|
| | | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| keine | | | | | |
| | | 600 V | 27 A | 12 | - |



1605602

https://www.phoenixcontact.com/us/products/1605602

Classifications

UNSPSC 21.0

ECLASS

| | ECLASS-13.0 | 27440116 |
|----|-------------|----------|
| | ECLASS-15.0 | 27440116 |
| ΕT | TIM | |
| | ETIM 9.0 | EC002635 |
| UN | ISPSC | |

39121400

Aug 1, 2025, 2:23 ☐ AM Page 8 (9)



1605602

https://www.phoenixcontact.com/us/products/1605602

Environmental product compliance

EU RoHS

| Yes 6(c) | |
|---|--|
| 6(c) | |
| | |
| | |
| EFUP-50 | |
| An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. | |
| | |
| Lead(CAS: 7439-92-1) | |
| d4981359-a703-4a06-813e-014615a0bc4f | |
| | |

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com