


BGM687U50

7x LNA Bank with Output Cross-Switch for 5G

Features

- Wide operating frequency range: 600 - 2700 MHz
- 2x LB LNA group: 600-960 MHz
- 5x MLB/MHB LNA group: 1400-2700 MHz
- Highly flexible output MUX
- Gain Mode Support for MediaTek, LSI and Qualcomm platforms
- Support of 4x4 MIMO and EN-DC with just 2 LNA-Banks
- Programmable power gain: 21 dB down to -12dB in 3dB steps
- Programmable current consumption for each LNA: 2.5 - 10 mA
- Noise figure for high gain mode: 0.8 dB
- Support of 1.2V and 1.8V Vdd/Vio
- RF output internally matched to 50 Ω
- Suitable for LTE / LTE-Advanced, 4G and 5G applications
- Integrated DC block capacitors at input and output
- Pin to pin compatible with MT6191 LNA bank
- Low power operation
- Small form factor 2.8 mm x 2.8 mm
- RoHS and WEEE compliant package
- USID select pin

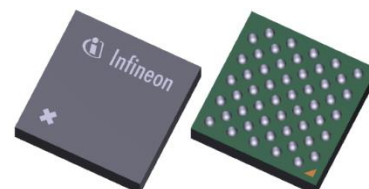

Description

The BGM687U50 is a 7x LNA-Bank with 2x Low Band and 5x Mid/High Band LNA groups with a complex output 7P7T cross-switch, designed for EN_DC/CA and MIMO operations.

The LNA-Bank supports 12 Gain Steps to optimize SNR, blocking performance and power consumption. The wideband LNA design with programmable gain (MIPI 3.0) and a highly configurable output MUX (7P7T) offer maximum system design flexibility.

7x LNA Bank with Output Cross-Switch for 5G

Block diagram and ordering information

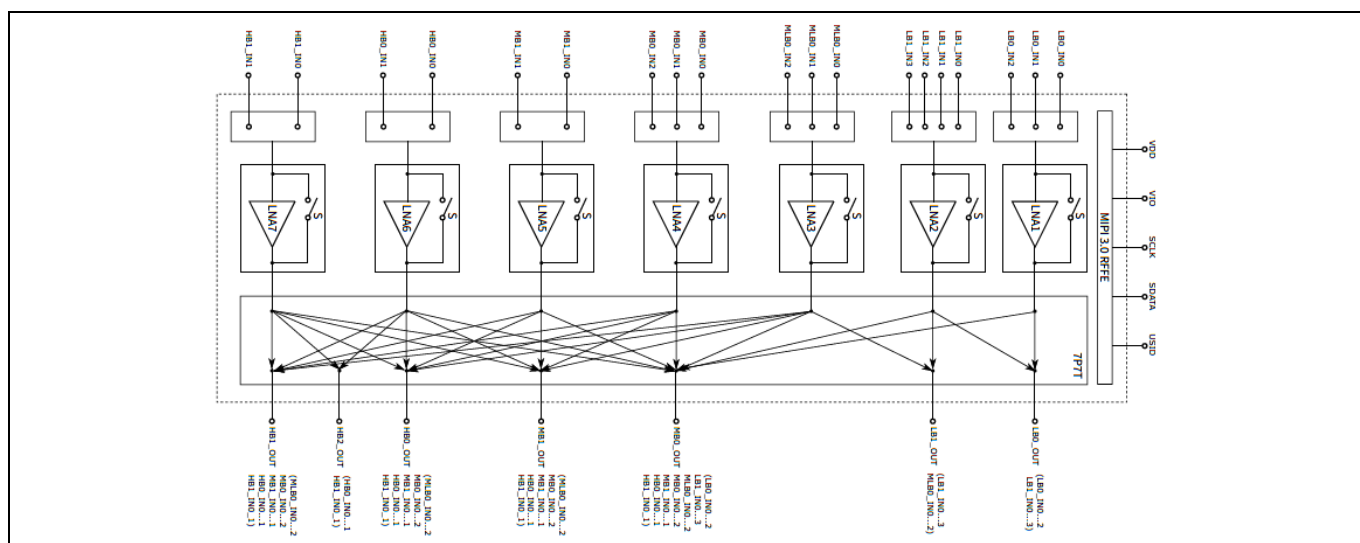


Figure 1 BGM687U50 Block diagram

Table 1 Ordering Information

Type	Marking	Package	Product name
BGM687U50	finA	PG-WF2BGA-50-1	BGM 687U50 E6327

For more technical information, please contact our Technical Assistance Center or your local Infineon representative.

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2023-10-10

Published by

Infineon Technologies AG
81726 München, Germany

© 2023 Infineon Technologies AG.
All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

ifx1

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.