

# NLAS4053

## Analog Multiplexer/ Demultiplexer

### Triple 2:1 Analog Switch–Multiplexer Improved Process, Sub–Micron Silicon Gate CMOS

The NLAS4053 is an improved version of the MC14053 and MC74HC4053 fabricated in sub-micron Silicon Gate CMOS technology for lower  $R_{DS(on)}$  resistance and improved linearity with low current. This device may be operated either with a single supply or dual supply up to  $\pm 3.0$  V to pass a 6 V<sub>pp</sub> signal without coupling capacitors.

When operating in single supply mode, it is only necessary to tie V<sub>EE</sub>, pin 7 to ground. For dual supply operation, V<sub>EE</sub> is tied to a negative voltage, not to exceed maximum ratings. Pin for pin compatible with all industry standard versions of '4053.'

#### Features


- Improved  $R_{DS(on)}$  Specifications
- Pin for Pin Replacement for MAX4053 and MAX4053A
  - One Half the Resistance Operating at 5.0 Volts
- Single or Dual Supply Operation
  - Single 3–5 Volt Operation, or Dual  $\pm 3.0$  Volt Operation
  - With V<sub>CC</sub> of 3.0 to 3.3 V, Device Can Interface with 1.8 V Logic, No Translators Needed
  - Address and Inhibit Pins are Over–Voltage Tolerant and May Be Driven Up +6.0 V Regardless of V<sub>CC</sub>
  - Greatly Improved Noise Margin Over MAX4053 and MAX4053A
- Improved Linearity Over Standard HC4053 Devices
- Popular SOIC and the Space Saving TSSOP Packages
- Pb–Free Packages are Available\*





ON Semiconductor®

<http://onsemi.com>


#### MARKING DIAGRAMS



SOIC–16  
D SUFFIX  
CASE 751B



TSSOP–16  
DT SUFFIX  
CASE 948F




A = Assembly Location  
L, WL = Wafer Lot  
Y = Year  
W, WW = Work Week  
G = Pb–Free Package  
▪ = Pb–Free Package  
(Note: Microdot may be in either location)

#### ORDERING INFORMATION


See detailed ordering and shipping information in the package dimensions section on page 4 of this data sheet.

\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NLAS4053

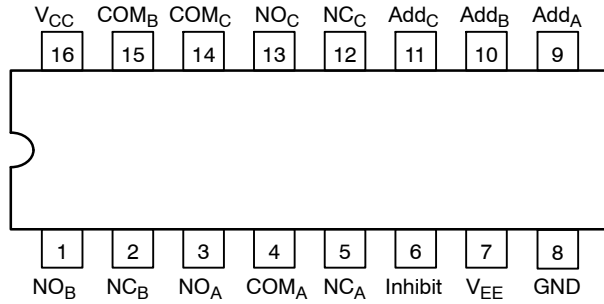

**Figure 1. Pin Connection**  
(Top View)

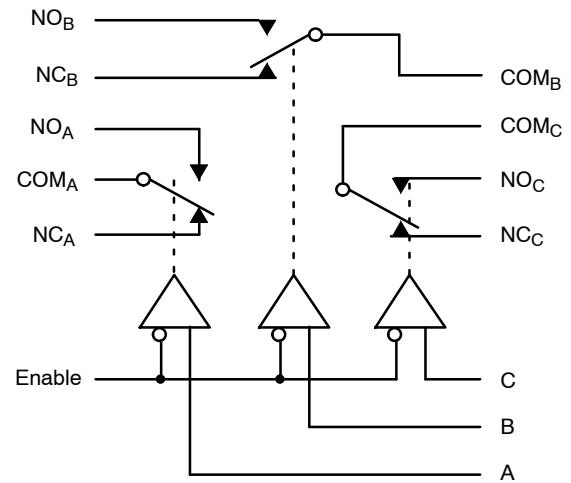

**Figure 2. Logic Diagram**

## TRUTH TABLE

| Inhibit | Address         |                 |                 | ON SWITCHES*                                                                                                    |
|---------|-----------------|-----------------|-----------------|-----------------------------------------------------------------------------------------------------------------|
|         | C               | B               | A               |                                                                                                                 |
| 1       | X<br>don't care | X<br>don't care | X<br>don't care | All switches open                                                                                               |
| 0       | 0               | 0               | 0               | COM <sub>A</sub> -NC <sub>A</sub> ,<br>COM <sub>B</sub> -NC <sub>B</sub> ,<br>COM <sub>C</sub> -NC <sub>C</sub> |
| 0       | 0               | 0               | 1               | COM <sub>A</sub> -NO <sub>A</sub> ,<br>COM <sub>B</sub> -NC <sub>B</sub> ,<br>COM <sub>C</sub> -NC <sub>C</sub> |
| 0       | 0               | 1               | 0               | COM <sub>A</sub> -NC <sub>A</sub> ,<br>COM <sub>B</sub> -NO <sub>B</sub> ,<br>COM <sub>C</sub> -NC <sub>C</sub> |
| 0       | 0               | 1               | 1               | COM <sub>A</sub> -NO <sub>A</sub> ,<br>COM <sub>B</sub> -NO <sub>B</sub> ,<br>COM <sub>C</sub> -NC <sub>C</sub> |
| 0       | 1               | 0               | 0               | COM <sub>A</sub> -NC <sub>A</sub> ,<br>COM <sub>B</sub> -NC <sub>B</sub> ,<br>COM <sub>C</sub> -NO <sub>C</sub> |
| 0       | 1               | 0               | 1               | COM <sub>A</sub> -NO <sub>A</sub> ,<br>COM <sub>B</sub> -NC <sub>B</sub> ,<br>COM <sub>C</sub> -NO <sub>C</sub> |
| 0       | 1               | 1               | 0               | COM <sub>A</sub> -NC <sub>A</sub> ,<br>COM <sub>B</sub> -NO <sub>B</sub> ,<br>COM <sub>C</sub> -NO <sub>C</sub> |
| 0       | 1               | 1               | 1               | COM <sub>A</sub> -NO <sub>A</sub> ,<br>COM <sub>B</sub> -NO <sub>B</sub> ,<br>COM <sub>C</sub> -NO <sub>C</sub> |

\*NO, NC, and COM pins are identical and interchangeable. Either may be considered an input or output; signals pass equally well in either direction.

# MAXIMUM RATINGS

| Symbol               | Parameter                                                                                            | Value                                        | Unit |
|----------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------|------|
| V <sub>EE</sub>      | Negative DC Supply Voltage (Referenced to GND)                                                       | −7.0 to +0.5                                 | V    |
| V <sub>CC</sub>      | Positive DC Supply Voltage (Note 1) (Referenced to GND) (Referenced to V <sub>EE</sub> )             | −0.5 to +7.0<br>−0.5 to +7.0                 | V    |
| V <sub>IS</sub>      | Analog Input Voltage                                                                                 | V <sub>EE</sub> −0.5 to V <sub>CC</sub> +0.5 | V    |
| V <sub>IN</sub>      | Digital Input Voltage (Referenced to GND)                                                            | −0.5 to 7.0                                  | V    |
| I                    | DC Current, Into or Out of Any Pin                                                                   | ± 50                                         | mA   |
| T <sub>STG</sub>     | Storage Temperature Range                                                                            | −65 to +150                                  | °C   |
| T <sub>L</sub>       | Lead Temperature, 1 mm from Case for 10 Seconds                                                      | 260                                          | °C   |
| T <sub>J</sub>       | Junction Temperature under Bias                                                                      | +150                                         | °C   |
| θ <sub>JA</sub>      | Thermal Resistance SOIC TSSOP                                                                        | 143<br>164                                   | °C/W |
| P <sub>D</sub>       | Power Dissipation in Still Air, SOIC TSSOP                                                           | 500<br>450                                   | mW   |
| MSL                  | Moisture Sensitivity                                                                                 | Level 1                                      |      |
| F <sub>R</sub>       | Flammability Rating Oxygen Index: 30% – 35%                                                          | UL 94 V-0 @ 0.125 in                         |      |
| V <sub>ESD</sub>     | ESD Withstand Voltage Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4) | > 2000<br>> 200<br>> 1000                    | V    |
| I <sub>LATCHUP</sub> | Latchup Performance Above V <sub>CC</sub> and Below GND at 125°C (Note 5)                            | ± 300                                        | mA   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. The absolute value of V<sub>CC</sub> ± |V<sub>EE</sub>| ≤ 7.0.
2. Tested to EIA/JESD22-A114-A.
3. Tested to EIA/JESD22-A115-A.
4. Tested to JESD22-C101-A.
5. Tested to EIA/JESD78.

# RECOMMENDED OPERATING CONDITIONS

| Symbol                          | Parameter                                                                                                              | Min             | Max             | Unit |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|------|
| V <sub>EE</sub>                 | Negative DC Supply Voltage (Referenced to GND)                                                                         | −5.5            | GND             | V    |
| V <sub>CC</sub>                 | Positive DC Supply Voltage (Referenced to GND) (Referenced to V <sub>EE</sub> )                                        | 2.5<br>2.5      | 5.5<br>6.6      | V    |
| V <sub>IS</sub>                 | Analog Input Voltage                                                                                                   | V <sub>EE</sub> | V <sub>CC</sub> | V    |
| V <sub>IN</sub>                 | Digital Input Voltage (Note 6) (Referenced to GND)                                                                     | 0               | 5.5             | V    |
| T <sub>A</sub>                  | Operating Temperature Range, All Package Types                                                                         | −55             | 125             | °C   |
| t <sub>r</sub> , t <sub>f</sub> | Input Rise/Fall Time (Channel Select or Enable Inputs) V <sub>CC</sub> = 3.0 V ± 0.3 V V <sub>CC</sub> = 5.0 V ± 0.5 V | 0<br>0          | 100<br>20       | ns/V |

6. Unused digital inputs may not be left open. All digital inputs must be tied to a high–logic voltage level or a low–logic input voltage level.

# NLAS4053

## ORDERING INFORMATION

| Device        | Package              | Shipping†        |
|---------------|----------------------|------------------|
| NLAS4053DG    | SOIC-16<br>(Pb-Free) | 48 Units / Rail  |
| NLAS4053DR2   | SOIC-16              | 2500 Tape & Reel |
| NLAS4053DR2G  | SOIC-16<br>(Pb-Free) | 2500 Tape & Reel |
| NLAS4053DT    | TSSOP-16*            | 96 Units / Rail  |
| NLAS4053DTG   | TSSOP-16*            | 96 Units / Rail  |
| NLAS4053DTR2  | TSSOP-16*            | 2500 Tape & Reel |
| NLAS4053DTR2G | TSSOP-16*            | 2500 Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

## DC CHARACTERISTICS – Digital Section (Voltages Referenced to GND)

| Symbol          | Parameter                                                    | Condition                                                           | V <sub>CC</sub><br>V | Guaranteed Limit |        |         | Unit |
|-----------------|--------------------------------------------------------------|---------------------------------------------------------------------|----------------------|------------------|--------|---------|------|
|                 |                                                              |                                                                     |                      | -55 to 25°C      | ≤ 85°C | ≤ 125°C |      |
| V <sub>IH</sub> | Minimum High-Level Input Voltage, Address and Inhibit Inputs |                                                                     | 2.0                  | 1.5              | 1.5    | 1.5     | V    |
|                 |                                                              |                                                                     | 3.0                  | 2.1              | 2.1    | 2.1     |      |
|                 |                                                              |                                                                     | 4.5                  | 3.15             | 3.15   | 3.15    |      |
|                 |                                                              |                                                                     | 5.5                  | 3.85             | 3.85   | 3.85    |      |
| V <sub>IL</sub> | Maximum Low-Level Input Voltage, Address and Inhibit Inputs  |                                                                     | 2.0                  | 0.5              | 0.5    | 0.5     | V    |
|                 |                                                              |                                                                     | 3.0                  | 0.9              | 0.9    | 0.9     |      |
|                 |                                                              |                                                                     | 4.5                  | 1.35             | 1.35   | 1.35    |      |
|                 |                                                              |                                                                     | 5.5                  | 1.65             | 1.65   | 1.65    |      |
| I <sub>IN</sub> | Maximum Input Leakage Current, Address or Inhibit Inputs     | V <sub>IN</sub> = 6.0 or GND                                        | 0 V to 6.0 V         | ± 0.1            | ± 1.0  | ± 1.0   | μA   |
| I <sub>CC</sub> | Maximum Quiescent Supply Current (per Package)               | Channel Select, Enable and V <sub>IS</sub> = V <sub>CC</sub> or GND | 6.0                  | 4.0              | 40     | 80      | μA   |

## DC ELECTRICAL CHARACTERISTICS – Analog Section

| Symbol                                       | Parameter                                                                          | Test Conditions                                                                                                                                                   | V <sub>CC</sub><br>V | V <sub>EE</sub><br>V | Guaranteed Limit |        |         | Unit |
|----------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|------------------|--------|---------|------|
|                                              |                                                                                    |                                                                                                                                                                   |                      |                      | -55 to 25°C      | ≤ 85°C | ≤ 125°C |      |
| R <sub>ON</sub>                              | Maximum "ON" Resistance                                                            | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>V <sub>IS</sub> = V <sub>EE</sub> to V <sub>CC</sub><br> I <sub>S</sub>   = 10 mA<br>(Figures 4 thru 9)   | 3.0                  | 0                    | 86               | 108    | 120     | Ω    |
|                                              |                                                                                    |                                                                                                                                                                   | 4.5                  | 0                    | 37               | 46     | 55      |      |
|                                              |                                                                                    |                                                                                                                                                                   | 3.0                  | -3.0                 | 26               | 33     | 37      |      |
| ΔR <sub>ON</sub>                             | Maximum Difference in "ON" Resistance Between Any Two Channels in the Same Package | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub> , V <sub>IS</sub> = 2.0 V<br>V <sub>IS</sub> = 3.5 V<br>V <sub>IS</sub> = 2.0 V<br> I <sub>S</sub>   = 10 mA | 3.0                  | 0                    | 15               | 20     | 20      | Ω    |
|                                              |                                                                                    |                                                                                                                                                                   | 4.5                  | 0                    | 13               | 18     | 18      |      |
|                                              |                                                                                    |                                                                                                                                                                   | 3.0                  | -3.0                 | 10               | 15     | 15      |      |
| R <sub>flat(ON)</sub>                        | COM-NO On-Resistance Flatness                                                      | V <sub>com</sub> 1, 2, 3.5 V<br>V <sub>com</sub> -2, 0, 2 V<br> I <sub>S</sub>   = 10 mA                                                                          | 4.5                  | 0                    | 4                | 4      | 5       | Ω    |
|                                              |                                                                                    |                                                                                                                                                                   | 3.0                  | -3.0                 | 2                | 2      | 3       |      |
| I <sub>NC(OFF)</sub><br>I <sub>NO(OFF)</sub> | Maximum Off-Channel Leakage Current                                                | Switch Off<br>V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>V <sub>IO</sub> = V <sub>CC</sub> -1.0 V or V <sub>EE</sub> +1.0 V<br>(Figure 17)           | 6.0                  | 0                    | 0.1              | 5.0    | 100     | nA   |
|                                              |                                                                                    |                                                                                                                                                                   | 3.0                  | -3.0                 | 0.1              | 5.0    | 100     |      |
| I <sub>COM(ON)</sub>                         | Maximum On-Channel Leakage Current, Channel- to-Channel                            | Switch On<br>V <sub>IO</sub> = V <sub>CC</sub> -1.0 V or V <sub>EE</sub> +1.0 V<br>(Figure 17)                                                                    | 6.0                  | 0                    | 0.1              | 5.0    | 100     | nA   |
|                                              |                                                                                    |                                                                                                                                                                   | 3.0                  | -3.0                 | 0.1              | 5.0    | 100     |      |

**AC CHARACTERISTICS** (Input  $t_r = t_f = 3$  ns)

| Symbol           | Parameter                      | Test Conditions                                      | V <sub>CC</sub><br>V | V <sub>EE</sub><br>V | Guaranteed Limit |      |        |         | Unit |
|------------------|--------------------------------|------------------------------------------------------|----------------------|----------------------|------------------|------|--------|---------|------|
|                  |                                |                                                      |                      |                      | -55 to 25°C      |      | ≤ 85°C | ≤ 125°C |      |
|                  |                                |                                                      |                      |                      | Min              | Typ* |        |         |      |
| t <sub>BBM</sub> | Minimum Break-Before-Make Time | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub> | 3.0                  | 0.0                  | 1.0              | 6.5  | –      | –       | ns   |
|                  |                                | V <sub>IS</sub> = V <sub>CC</sub>                    | 4.5                  | 0.0                  | 1.0              | 5.0  | –      | –       |      |
|                  |                                | R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF       | 3.0                  | –3.0                 | 1.0              | 3.5  | –      | –       |      |
|                  |                                | (Figure 19)                                          |                      |                      |                  |      |        |         |      |

\*Typical Characteristics are at 25°C.

**AC CHARACTERISTICS** ( $C_L = 50$  pF, Input  $t_r = t_f = 3$  ns)

| Symbol             | Parameter                                                                                   | V <sub>CC</sub><br>V | V <sub>EE</sub><br>V | Guaranteed Limit |     |     |        |     |         | Unit |     |
|--------------------|---------------------------------------------------------------------------------------------|----------------------|----------------------|------------------|-----|-----|--------|-----|---------|------|-----|
|                    |                                                                                             |                      |                      | −55 to 25°C      |     |     | ≤ 85°C |     | ≤ 125°C |      |     |
|                    |                                                                                             |                      |                      | Min              | Typ | Max | Min    | Max | Min     |      | Max |
| t <sub>TRANS</sub> | Transition Time<br>(Address Selection Time)<br>(Figure 18)                                  | 2.5                  | 0                    |                  |     | 40  |        | 45  |         | 50   | ns  |
|                    |                                                                                             | 3.0                  | 0                    |                  |     | 28  |        | 30  |         | 35   |     |
|                    |                                                                                             | 4.5                  | 0                    |                  |     | 23  |        | 25  |         | 30   |     |
|                    |                                                                                             | 3.0                  | −3.0                 |                  |     | 23  |        | 25  |         | 28   |     |
| t <sub>ON</sub>    | Turn-on Time<br>(Figures 14, 15, 20, and 21)<br>Enable to N <sub>O</sub> or N <sub>C</sub>  | 2.5                  | 0                    |                  |     | 40  |        | 45  |         | 50   | ns  |
|                    |                                                                                             | 3.0                  | 0                    |                  |     | 28  |        | 30  |         | 35   |     |
|                    |                                                                                             | 4.5                  | 0                    |                  |     | 23  |        | 25  |         | 30   |     |
|                    |                                                                                             | 3.0                  | −3.0                 |                  |     | 23  |        | 25  |         | 28   |     |
| t <sub>OFF</sub>   | Turn-off Time<br>(Figures 14, 15, 20, and 21)<br>Enable to N <sub>O</sub> or N <sub>C</sub> | 2.5                  | 0                    |                  |     | 40  |        | 45  |         | 50   | ns  |
|                    |                                                                                             | 3.0                  | 0                    |                  |     | 28  |        | 30  |         | 35   |     |
|                    |                                                                                             | 4.5                  | 0                    |                  |     | 23  |        | 25  |         | 30   |     |
|                    |                                                                                             | 3.0                  | −3.0                 |                  |     | 23  |        | 25  |         | 28   |     |

|                                       |                                         | Typical @ 25°C, V <sub>CC</sub> = 5.0 V | pF |
|---------------------------------------|-----------------------------------------|-----------------------------------------|----|
| C <sub>IN</sub>                       | Maximum Input Capacitance,Select Inputs | 8                                       |    |
| C <sub>NO</sub> or<br>C <sub>NC</sub> | Analog I/O                              | 10                                      |    |
| C <sub>COM</sub>                      | Common I/O                              | 10                                      |    |
| C <sub>(ON)</sub>                     | Feedthrough                             | 1.0                                     |    |

**ADDITIONAL APPLICATION CHARACTERISTICS** (GND = 0 V)

| Symbol    | Parameter                                                  | Condition                                                                                                                                                             | $V_{CC}$<br>V | $V_{EE}$<br>V | Typ  | Unit |
|-----------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------|------|------|
|           |                                                            |                                                                                                                                                                       |               |               | 25°C |      |
| BW        | Maximum On-Channel Bandwidth or Minimum Frequency Response | $V_{IS} = \frac{1}{2}(V_{CC} - V_{EE})$<br>Source Amplitude = 0 dBm<br>(Figures 10 and 22)                                                                            | 3.0           | 0.0           | 145  | MHz  |
|           |                                                            |                                                                                                                                                                       | 4.5           | 0.0           | 165  |      |
|           |                                                            |                                                                                                                                                                       | 6.0           | 0.0           | 180  |      |
|           |                                                            |                                                                                                                                                                       | 3.0           | –3.0          | 180  |      |
| $V_{ISO}$ | Off-Channel Feedthrough Isolation                          | $f = 100$ kHz; $V_{IS} = \frac{1}{2}(V_{CC} - V_{EE})$<br>Source = 0 dBm<br>(Figures 12 and 22)                                                                       | 3.0           | 0.0           | –93  | dB   |
|           |                                                            |                                                                                                                                                                       | 4.5           | 0.0           | –93  |      |
|           |                                                            |                                                                                                                                                                       | 6.0           | 0.0           | –93  |      |
|           |                                                            |                                                                                                                                                                       | 3.0           | –3.0          | –93  |      |
| $V_{ONL}$ | Maximum Feedthrough On Loss                                | $V_{IS} = \frac{1}{2}(V_{CC} - V_{EE})$<br>Source = 0 dBm<br>(Figures 10 and 22)                                                                                      | 3.0           | 0.0           | –2   | dB   |
|           |                                                            |                                                                                                                                                                       | 4.5           | 0.0           | –2   |      |
|           |                                                            |                                                                                                                                                                       | 6.0           | 0.0           | –2   |      |
|           |                                                            |                                                                                                                                                                       | 3.0           | –3.0          | –2   |      |
| Q         | Charge Injection                                           | $V_{IN} = V_{CC}$ to $V_{EE}$ , $f_{IS} = 1$ kHz, $t_r = t_f = 3$ ns<br>$R_{IS} = 0\ \Omega$ , $C_L = 1000$ pF, $Q = C_L \cdot \Delta V_{OUT}$<br>(Figures 16 and 23) | 5.0           | 0.0           | 9.0  | pC   |
|           |                                                            |                                                                                                                                                                       | 3.0           | –3.0          | 12   |      |
| THD       | Total Harmonic Distortion THD + Noise                      | $f_{IS} = 1$ MHz, $R_L = 10$ K $\Omega$ , $C_L = 50$ pF,<br>$V_{IS} = 5.0$ V <sub>PP</sub> sine wave<br>$V_{IS} = 6.0$ V <sub>PP</sub> sine wave<br>(Figure 13)       | 6.0           | 0.0           | 0.10 | %    |
|           |                                                            |                                                                                                                                                                       | 3.0           | –3.0          | 0.05 |      |

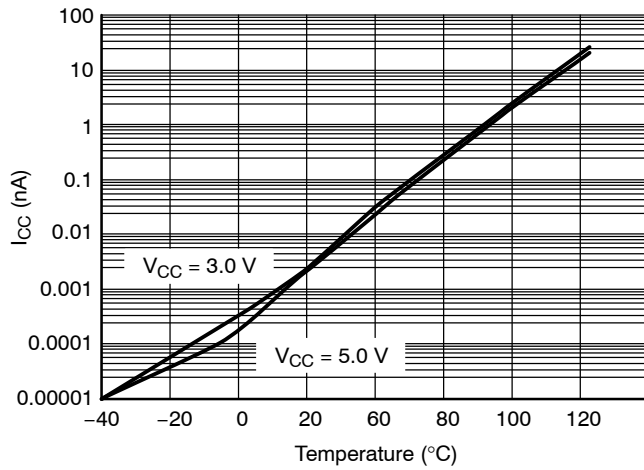


Figure 3.  $I_{CC}$  versus Temp,  $V_{CC} = 3\text{ V}$  and  $5\text{ V}$

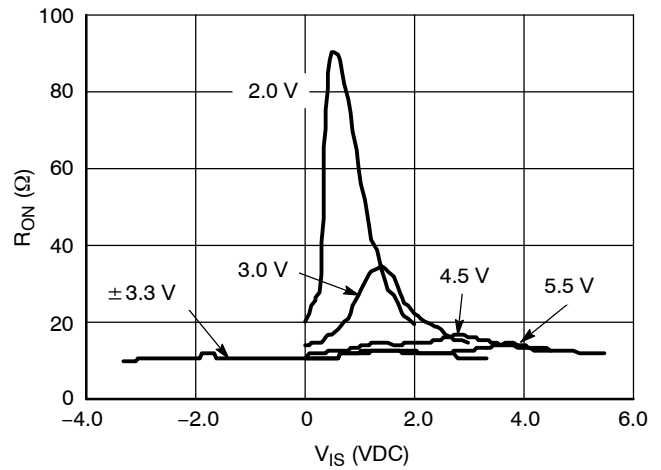


Figure 4.  $R_{ON}$  versus  $V_{CC}$ , Temp =  $25^{\circ}\text{C}$

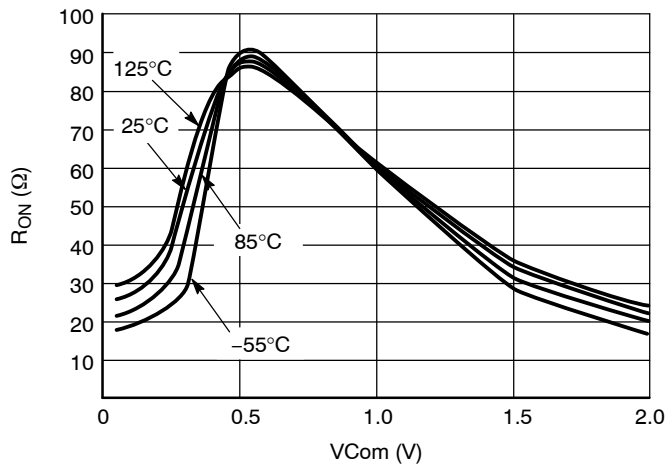


Figure 5. Typical On Resistance  
 $V_{CC} = 2.0\text{ V}$ ,  $V_{EE} = 0\text{ V}$

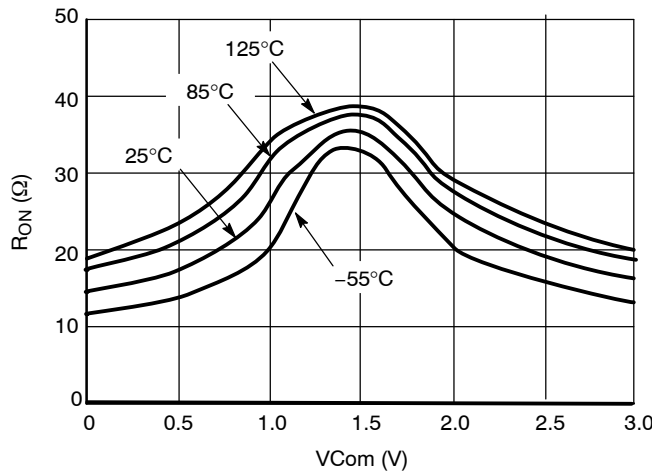


Figure 6. Typical On Resistance  
 $V_{CC} = 3.0\text{ V}$ ,  $V_{EE} = 0\text{ V}$

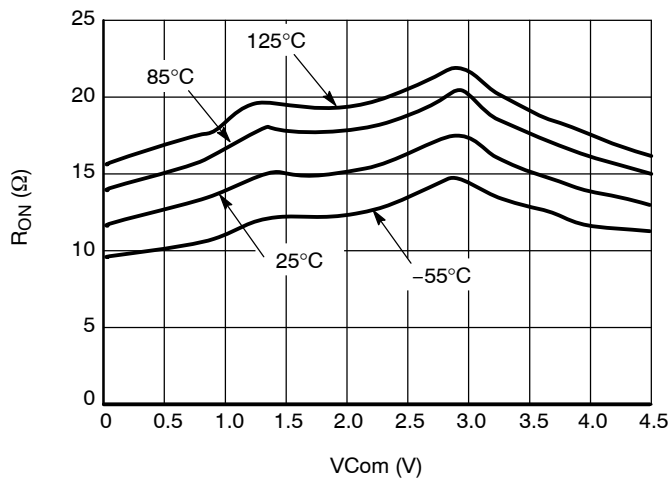


Figure 7. Typical On Resistance  
 $V_{CC} = 4.5\text{ V}$ ,  $V_{EE} = 0\text{ V}$



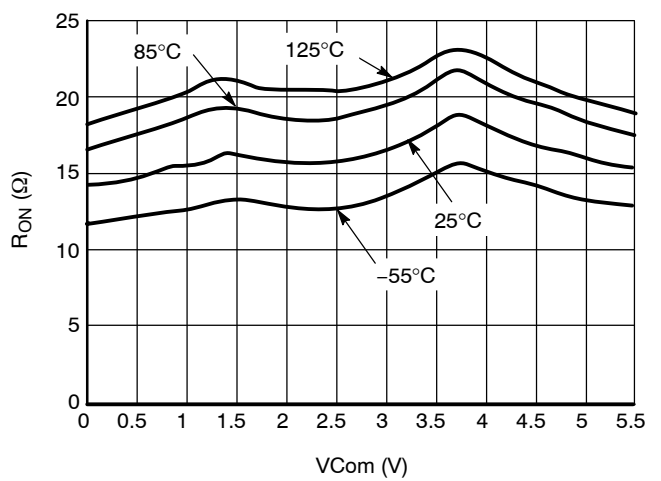


Figure 8. Typical On Resistance  
 $V_{CC} = 5.5\text{ V}$ ,  $V_{EE} = 0\text{ V}$


# NLAS4053

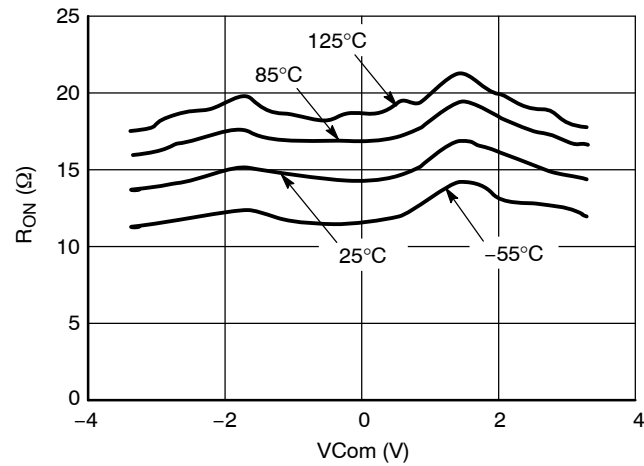


**Figure 9. Typical On Resistance**  
 $V_{CC} = 3.3$  V,  $V_{EE} = -3.3$  V

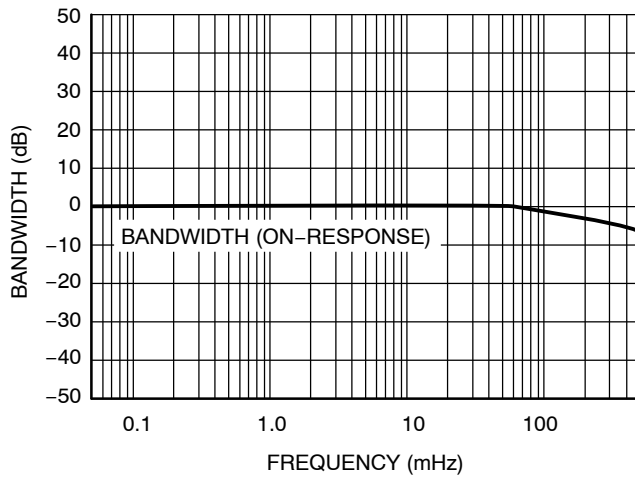


**Figure 10. Bandwidth**

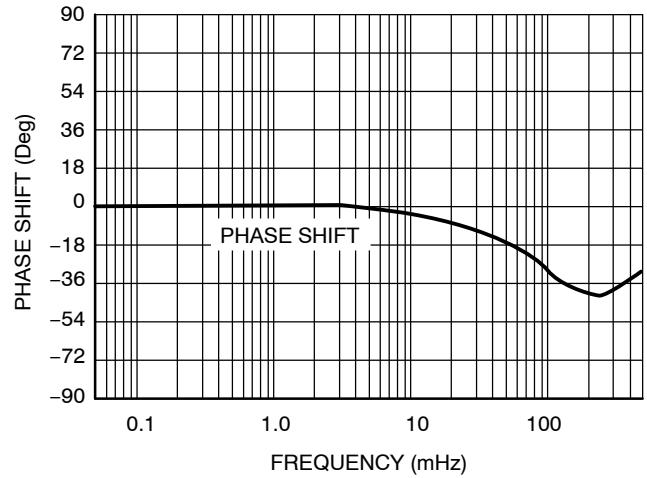

**Figure 11. Phase Shift**

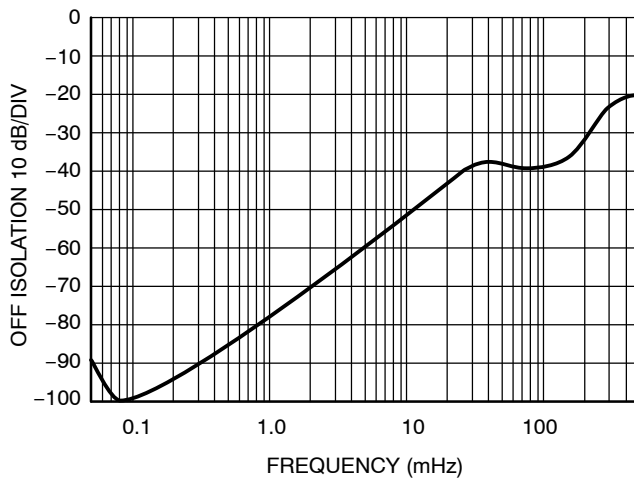

**Figure 12. Off Isolation**

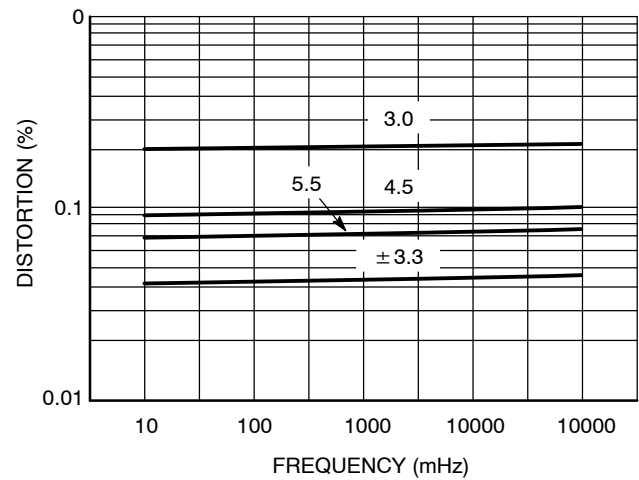

**Figure 13. Total Harmonic Distortion**

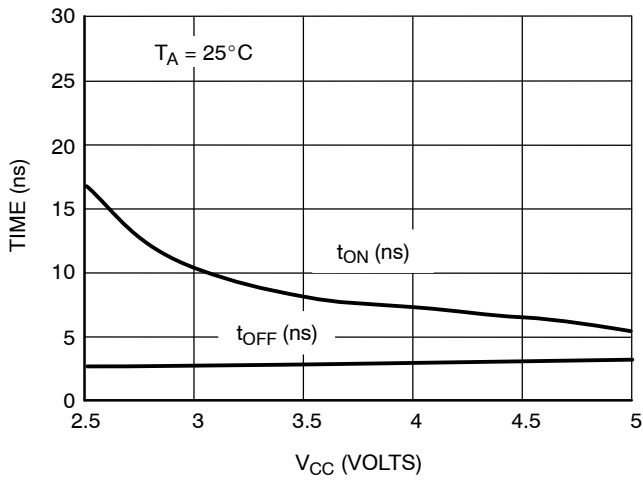


Figure 14.  $t_{ON}$  and  $t_{OFF}$  versus  $V_{CC}$

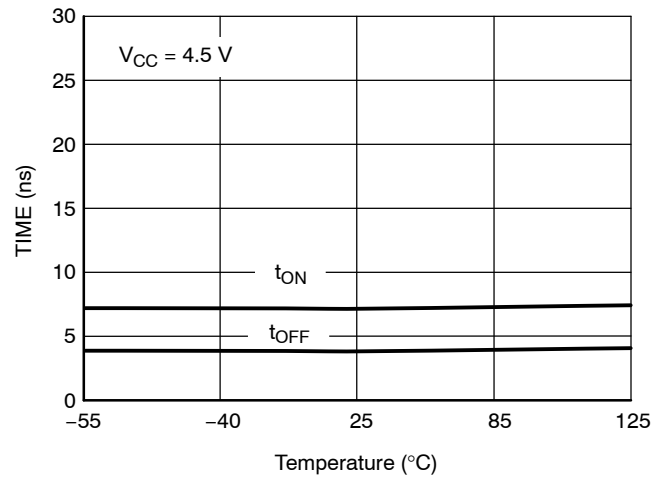


Figure 15.  $t_{ON}$  and  $t_{OFF}$  versus Temp

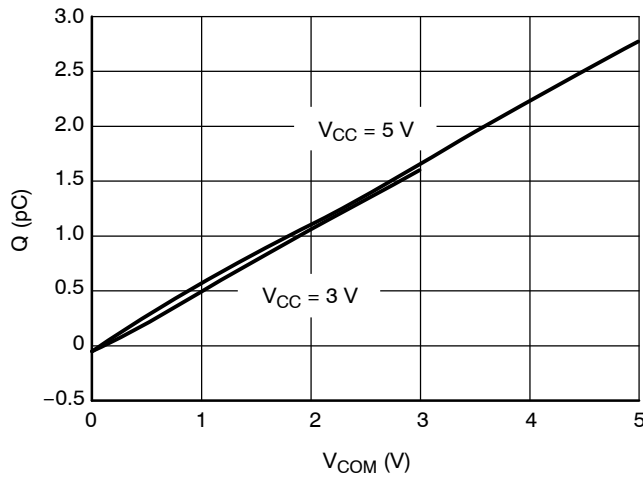


Figure 16. Charge Injection versus COM Voltage

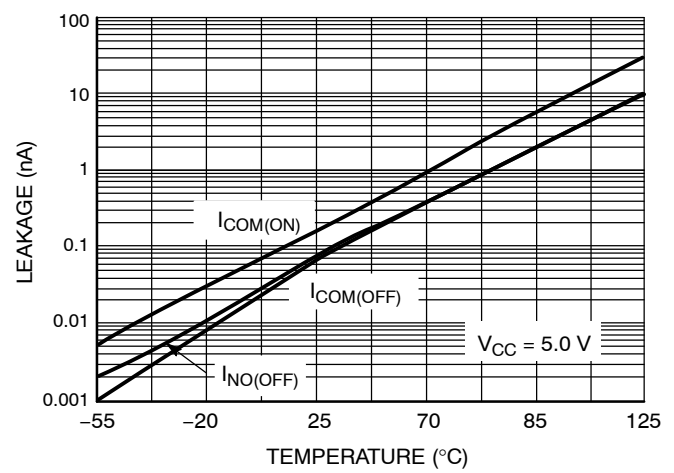


Figure 17. Switch Leakage versus Temperature

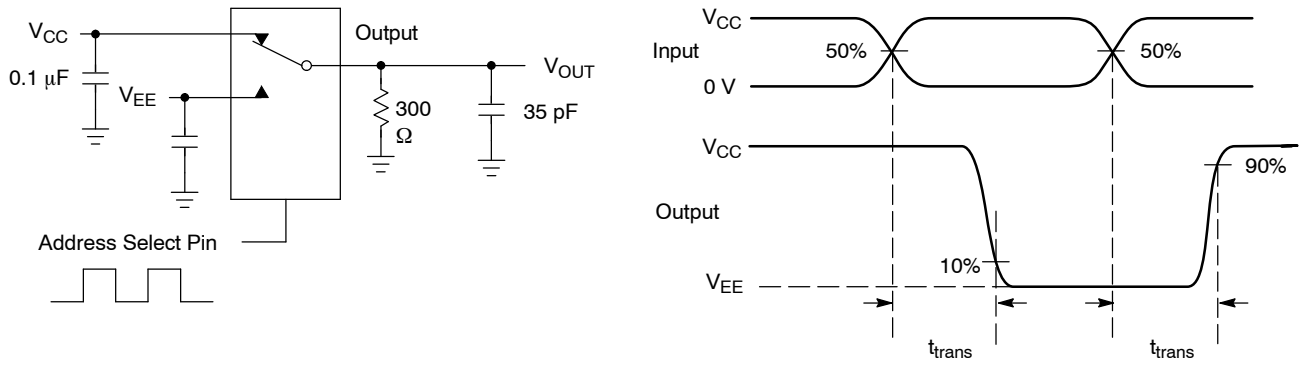


Figure 18. Channel Selection Propagation Delay

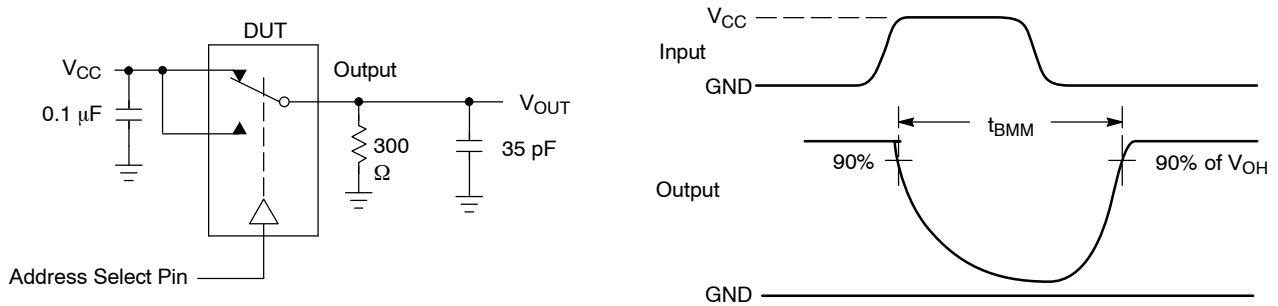


Figure 19.  $t_{\text{BMM}}$  (Time Break-Before-Make)

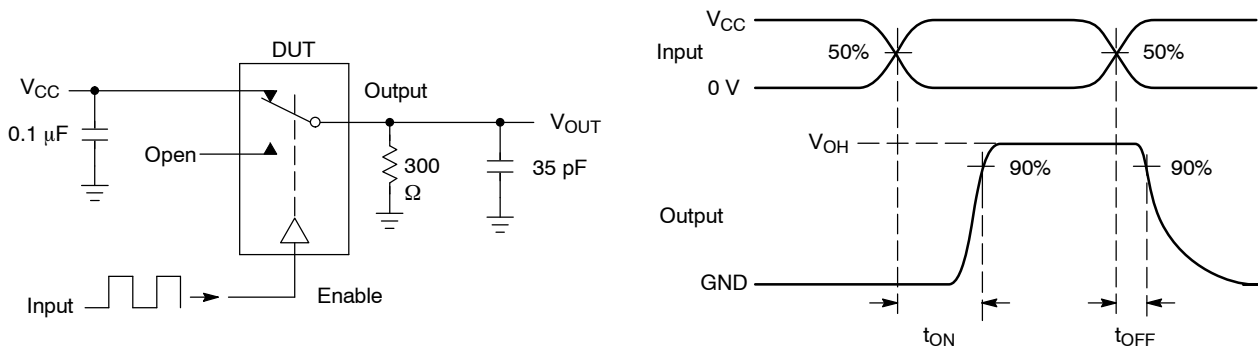


Figure 20.  $t_{\text{ON}}/t_{\text{OFF}}$


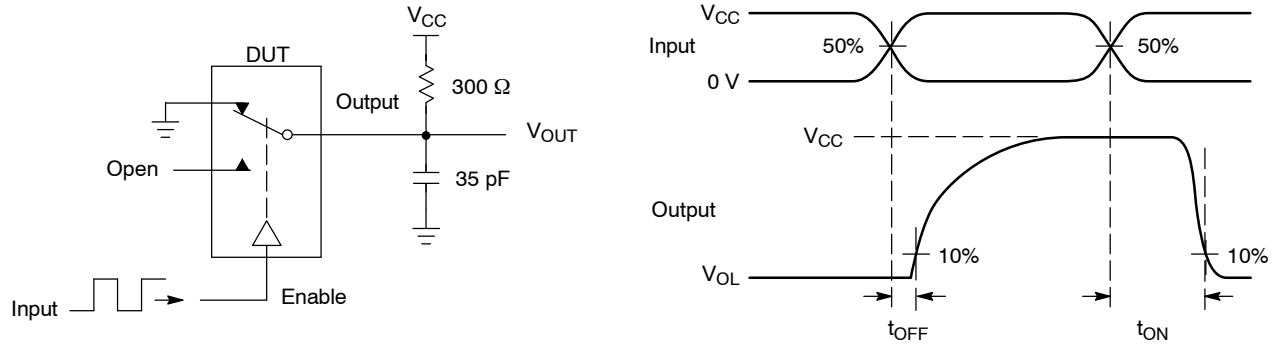


Figure 21.  $t_{ON}/t_{OFF}$

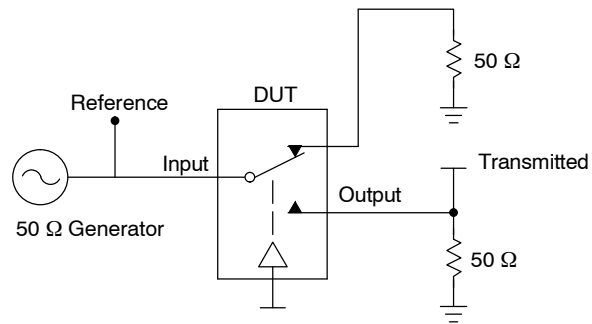

Channel switch control/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch.  $V_{ISO}$ , Bandwidth and  $V_{ONL}$  are independent of the input signal direction.

$$V_{ISO} = \text{Off Channel Isolation} = 20 \text{ Log} \left( \frac{V_{OUT}}{V_{IN}} \right) \text{ for } V_{IN} \text{ at } 100 \text{ kHz}$$

$$V_{ONL} = \text{On Channel Loss} = 20 \text{ Log} \left( \frac{V_{OUT}}{V_{IN}} \right) \text{ for } V_{IN} \text{ at } 100 \text{ kHz to } 50 \text{ MHz}$$

Bandwidth (BW) = the frequency 3 dB below  $V_{ONL}$

Figure 22. Off Channel Isolation/On Channel Loss (BW)/Crosstalk (On Channel to Off Channel)/ $V_{ONL}$

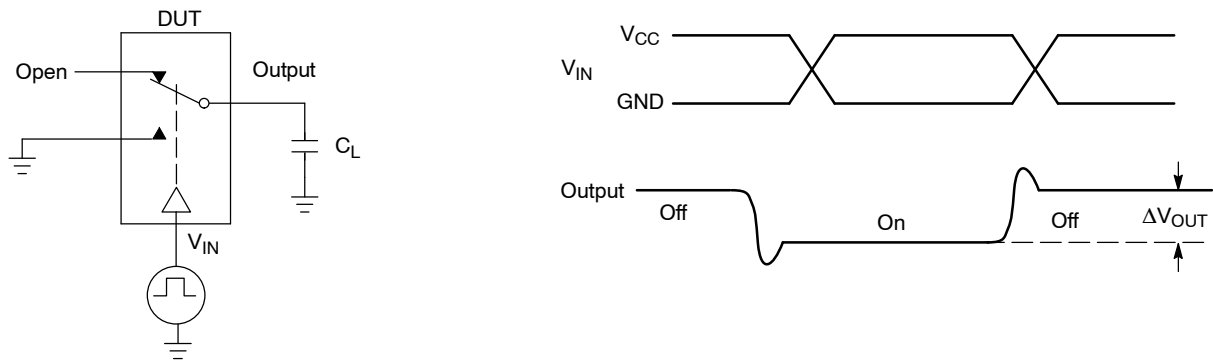


Figure 23. Charge Injection: (Q)

### TYPICAL OPERATION




Figure 24. 5.0 Volts Single Supply  
 $V_{CC} = 5.0 \text{ V}$ ,  $V_{EE} = 0$





Figure 25. Dual Supply  
 $V_{CC} = 3.0 \text{ V}$ ,  $V_{EE} = -3.0 \text{ V}$

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS




SCALE 1:1

### SOIC-16

#### CASE 751B-05

#### ISSUE K

DATE 29 DEC 2006

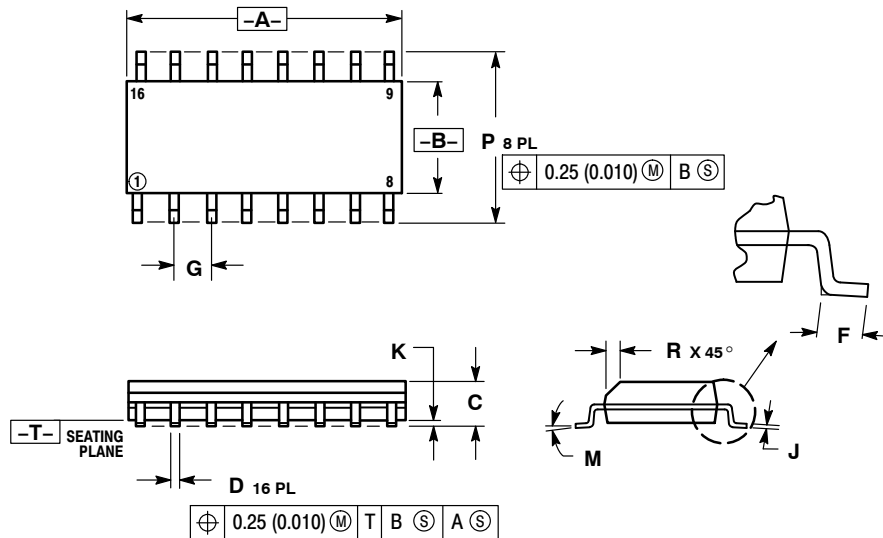


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| R   | 5.80        | 6.20  | 0.229     | 0.244 |
| S   | 0.25        | 0.50  | 0.010     | 0.019 |

|                      |                   |                           |                          |
|----------------------|-------------------|---------------------------|--------------------------|
| STYLE 1:             | STYLE 2:          | STYLE 3:                  | STYLE 4:                 |
| PIN 1. COLLECTOR     | PIN 1. CATHODE    | PIN 1. COLLECTOR, DYE #1  | PIN 1. COLLECTOR, DYE #1 |
| 2. BASE              | 2. ANODE          | 2. BASE, #1               | 2. COLLECTOR, #1         |
| 3. EMITTER           | 3. NO CONNECTION  | 3. EMITTER, #1            | 3. COLLECTOR, #2         |
| 4. NO CONNECTION     | 4. CATHODE        | 4. COLLECTOR, #1          | 4. COLLECTOR, #2         |
| 5. EMITTER           | 5. CATHODE        | 5. COLLECTOR, #2          | 5. COLLECTOR, #3         |
| 6. BASE              | 6. NO CONNECTION  | 6. BASE, #2               | 6. COLLECTOR, #3         |
| 7. COLLECTOR         | 7. ANODE          | 7. EMITTER, #2            | 7. COLLECTOR, #4         |
| 8. COLLECTOR         | 8. CATHODE        | 8. COLLECTOR, #2          | 8. COLLECTOR, #4         |
| 9. BASE              | 9. CATHODE        | 9. COLLECTOR, #3          | 9. BASE, #4              |
| 10. EMITTER          | 10. ANODE         | 10. BASE, #3              | 10. EMITTER, #4          |
| 11. NO CONNECTION    | 11. NO CONNECTION | 11. EMITTER, #3           | 11. BASE, #3             |
| 12. EMITTER          | 12. CATHODE       | 12. COLLECTOR, #3         | 12. EMITTER, #3          |
| 13. BASE             | 13. CATHODE       | 13. COLLECTOR, #4         | 13. BASE, #2             |
| 14. COLLECTOR        | 14. NO CONNECTION | 14. BASE, #4              | 14. EMITTER, #2          |
| 15. EMITTER          | 15. ANODE         | 15. EMITTER, #4           | 15. BASE, #1             |
| 16. COLLECTOR        | 16. CATHODE       | 16. COLLECTOR, #4         | 16. EMITTER, #1          |
| STYLE 5:             | STYLE 6:          | STYLE 7:                  |                          |
| PIN 1. DRAIN, DYE #1 | PIN 1. CATHODE    | PIN 1. SOURCE N-CH        |                          |
| 2. DRAIN, #1         | 2. CATHODE        | 2. COMMON DRAIN (OUTPUT)  |                          |
| 3. DRAIN, #2         | 3. CATHODE        | 3. COMMON DRAIN (OUTPUT)  |                          |
| 4. DRAIN, #2         | 4. CATHODE        | 4. GATE P-CH              |                          |
| 5. DRAIN, #3         | 5. CATHODE        | 5. COMMON DRAIN (OUTPUT)  |                          |
| 6. DRAIN, #3         | 6. CATHODE        | 6. COMMON DRAIN (OUTPUT)  |                          |
| 7. DRAIN, #4         | 7. CATHODE        | 7. COMMON DRAIN (OUTPUT)  |                          |
| 8. DRAIN, #4         | 8. CATHODE        | 8. SOURCE P-CH            |                          |
| 9. GATE, #4          | 9. ANODE          | 9. SOURCE P-CH            |                          |
| 10. SOURCE, #4       | 10. ANODE         | 10. COMMON DRAIN (OUTPUT) |                          |
| 11. GATE, #3         | 11. ANODE         | 11. COMMON DRAIN (OUTPUT) |                          |
| 12. SOURCE, #3       | 12. ANODE         | 12. COMMON DRAIN (OUTPUT) |                          |
| 13. GATE, #2         | 13. ANODE         | 13. GATE N-CH             |                          |
| 14. SOURCE, #2       | 14. ANODE         | 14. COMMON DRAIN (OUTPUT) |                          |
| 15. GATE, #1         | 15. ANODE         | 15. COMMON DRAIN (OUTPUT) |                          |
| 16. SOURCE, #1       | 16. ANODE         | 16. SOURCE N-CH           |                          |

#### RECOMMENDED SOLDERING FOOTPRINT\*

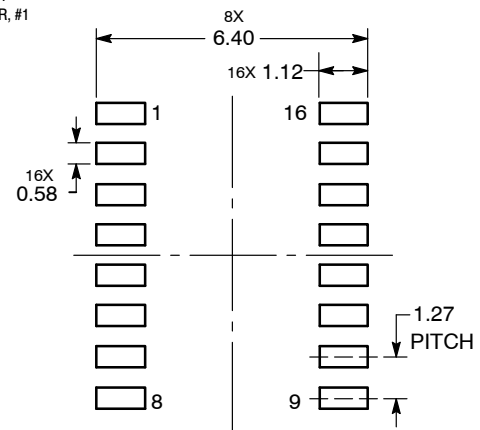


DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                  |             |                                                                                                                                                                                  |
|------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42566B | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SOIC-16     | PAGE 1 OF 1                                                                                                                                                                      |


onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



**TSSOP-16 WB**  
CASE 948F  
ISSUE B

DATE 19 OCT 2006

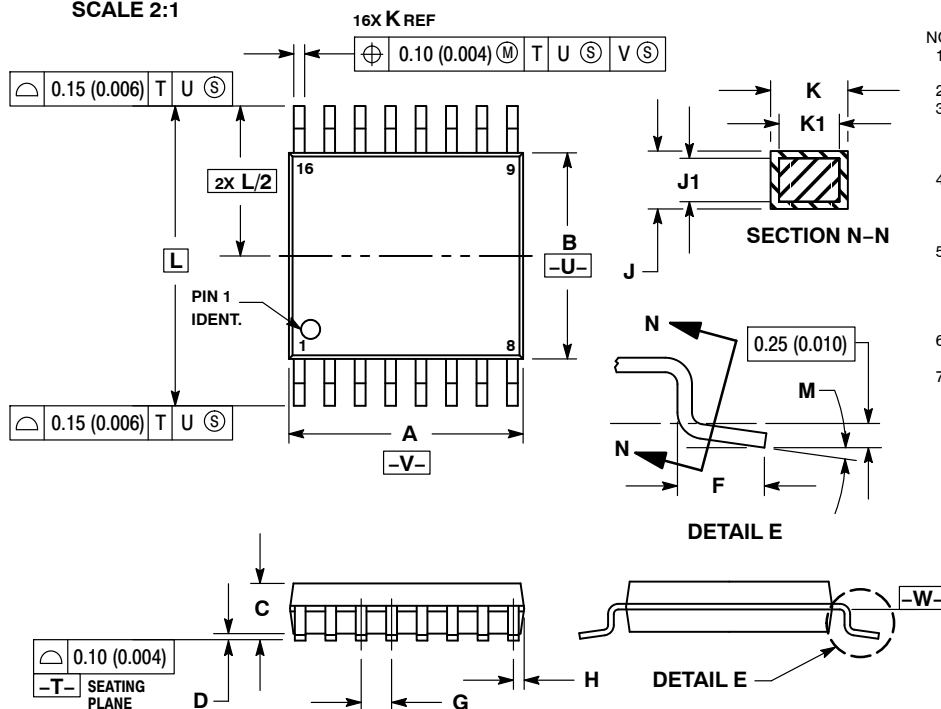


## NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.18        | 0.28 | 0.007     | 0.011 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

## RECOMMENDED SOLDERING FOOTPRINT\*

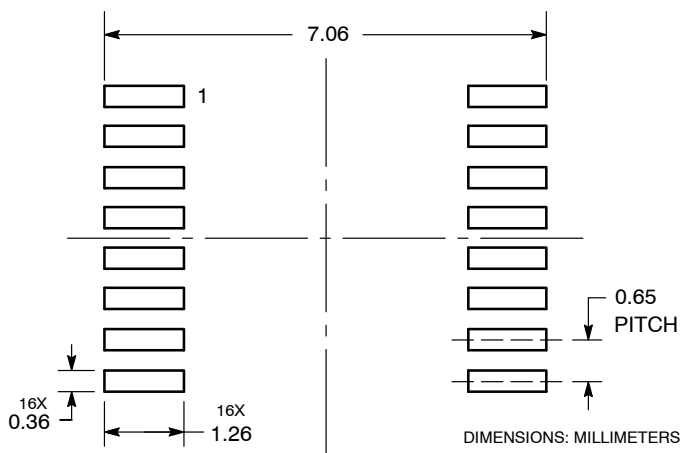

## GENERIC MARKING DIAGRAM\*



- XXXX = Specific Device Code  
A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
G or ■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                    |                                                                                                                                                                                  |
|-------------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASH70247A</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>TSSOP-16</b>    | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

**onsemi** and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

