

COMPACT SLIM TWIN AND SINGLE TYPE AUTOMOTIVE RELAY

CJ RELAYS (ACJ)

TYPICAL APPLICATIONS

Powered windows

• Powered sunroofs

Powered seats

Lift gates

Automatic door locks

Electrically powered mirrors

• Smart J/B related products, etc.

FEATURES

• It is extremely compact at approx. 2/3 the size of previous products.

Compared to our previous miniature type CT relay, both the 1 Form C and 10-pin and 8-pin twin types take up approx. two-thirds the space and volume. This makes them ideal for relay unit miniaturization.

Compact and high-capacity 25 A load switching

High capacity control is possible while being compact and capable of motor lock load switching at 25 A, 14 V DC.

Pin in Paste* compatible model added

Models compatible with the recently increasing Pin in Paste technique (reflow solder mounting) have been added.


Pin in Paste compatible models are the flux tight type.

* The Pin in Paste method may sometimes be referred to as THR (Through-hole Reflow).

Environmental protection specifications

Cadmium-free contacts and use of leadfree solder are standard. Environmental pollutants are not used.

ORDERING INFORMATION



TYPES

Contact arrangement	Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Part No.		
			Standard type	Pin in Paste type	
1 Form C	12 V DC	Max.6.5 V DC (Initial)	ACJ1112	ACJ1112P	
		Max.7.2 V DC (Initial)	ACJ1212	ACJ1212P	
1 Form C × 2 (8 terminal)		Max.6.5 V DC (Initial)	ACJ2112	ACJ2112P	
		Max.7.2 V DC (Initial)	ACJ2212	ACJ2212P	
1 Form C × 2 (10 terminal)		Max.6.5 V DC (Initial)	ACJ5112	ACJ5112P	
		Max.7.2 V DC (Initial)	ACJ5212	ACJ5212P	

Standard packing; Carton (tube): 70 pcs.; Case: 2,800 pcs. (1 Form C), Carton (tube): 40 pcs.; Case: 1,000 pcs. (8 terminal), Carton (tube): 35 pcs.; Case: 1,400 pcs. (10 terminal)

ds_61215_en_cj: 010113D

RATING

1. Coil data

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power (at 20°C 68°F)	Usable voltage range*
12 V DC	Max. 7.2 V DC (Initial)	Min. 1.0 V DC (Initial)	53.3 mA	225Ω	640 mW	10 to 16 V DC
	Max. 6.5 V DC (Initial)	Min. 0.8 V DC (Initial)	66.7 mA	180Ω	800 mW	9 to 16 V DC

* Other usable voltage range types are also available. Please contact us for details.

2. Specifications

Characteristics	Item		Specifications		
	Arrangement		1 Form C, 1 Form C×2		
Contact	Contact resistance (Initial)		N.O.: Typ7mΩ, N.C.: Typ10mΩ (By voltage drop 6 V DC 1 A)		
	Contact material		Ag alloy (Cadmium free)		
Protective construction			Standard type: Sealed type Pin in Paste type: Flux tight type		
	Nominal switching capacity (resistive load)		N.O.: 20A 14V DC, N.C.: 10A 14V DC		
Rating	Max. carrying current (14V DC)		N.O.: 20 A for 1 hour, 30 A for 2 minutes (at 20°C 68°F) (when coil powered on one side)		
	Nominal operating power		640 mW (for pick-up voltage max. 7.2 V DC), 800 mW (for pick-up voltage max. 6.5 V DC)		
	Min. switching capacity (resistive load)*1		1A 14V DC		
	Initial insulation resistance		Min. 100 M Ω (at 500V DC, Measurement at same location as "Breakdown voltage" section.)		
	Breakdown	Between open contacts	500 Vrms for 1 min. (Detection current: 10mA)		
Electrical characteristics	voltage (Initial)	Between contacts and coil	500 Vrms for 1 min. (Detection current: 10mA)		
characteristics	Operate time (at nominal voltage)		Max. 10ms (at 20°C 68°F, excluding contact bounce time) (Initial)		
	Release time (at nominal voltage)		Max. 10ms (at 20°C 68°F, excluding contact bounce time) (Initial)		
	Shock resistance	Functional	Min. 100 m/s ² {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10µs)		
Mechanical characteristics		Destructive	Min. 1,000 m/s ² {100G} (Half-wave pulse of sine wave: 6ms)		
		Functional	10 Hz to 100 Hz, Min. 44.1m/s ² {4.5G} (Detection time: 10µs)		
	Vibration resistance	Destructive	10 Hz to 500 Hz, Min. 44.1m/s ² {4.5G} Time of vibration for each direction; X, Y direction: 2 hours, Z direction: 4 hours		
	Mechanical		Min. 10 ⁷ (at 120 cpm)		
Expected life	fe Electrical		[Standard type] <resistive load=""> Min. 10⁵ (at nominal switching capacity, operating frequency: 1s ON, 9s OFF) <motor load=""> N.O. side: Min. 2×10⁵: at 25 A (inrush), 5 A (steady), 14 V DC; Min. 10⁵: at 25 A 14 V DC (Motor lock) N.C. side: Min. 2×10⁵: at 20 A 14 V DC (brake) (Operating frequency: 0.5s ON, 9.5s OFF) [Pin in Paste type] <resistive load=""> Min. 10⁵ (at nominal switching capacity, operating frequency: 1s ON, 9s OFF) <motor load=""> N.O. side: Min. 10⁵: at 25 A (inrush), 5 A (steady), 14 V DC; Min. 5×10⁴: at 25 A 14 V DC (Motor lock) N.C. side: Min. 10⁵: at 20 A 14 V DC (brake) (Operating frequency: 0.5s ON, 9.5s OFF)</motor></resistive></motor></resistive>		
Conditions	Conditions for operation, transport and storage*2		Ambient temperature: -40°C to +85°C -40°F to +185°F Humidity: 5% R.H. to 85% R.H. (Not freezing and condensing at low temperature)		
	Max. operating speed		6 cpm (at nominal switching capacity)		
Mass			1 Form C type: approx. 3.5 g .12 oz, Twin type: approx. 6.5 g .23 oz		


Notes:

*1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load. *2. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Refer to "6. Usage, Storage and Transport Conditions" in AMBIENT ENVIRONMENT section in Relay Technical Information.


Conditions in AMBIENT ENVIRONMENT Section in Relay Technical Information.
Please inquire if you will be using the relay in a high temperature atmosphere (110°C 230°F).
*3. Depends on connection conditions. Also, this does not guarantee repeated switching. We recommend that you confirm operation under actual conditions.
* If the relay is used continuously for long periods of time with coils on both sides in an energized condition, breakdown might occur due to abnormal heating depending on the carrying condition. Therefore, please inquire when using with a circuit that causes an energized condition on both sides simultaneously.

REFERENCE DATA

1.-(1) Coil temperature rise (at room temperature) Sample: ACJ1212, 3pcs Measured portion: Inside the coil Contact carrying current: 10A, 15A, 20A Ambient temperature: 25°C 77°F




1.-(2) Coil temperature rise (at 85°C 185°F) Sample: ACJ1212, 3pcs Measured portion: Inside the coil Contact carrying current: 10A, 15A, 20A Ambient temperature: 85°C 185°F




1.-(5) Coil temperature rise (at room temperature)


Sample: ACJ5212, 3pcs Measured portion: Inside the coil Contact carrying current: 10A, 15A, 20A Ambient temperature: 25°C 77°F




2.-(2) Ambient temperature and operating voltage range








1.-(6) Coil temperature rise (at 85°C 185°F) Sample: ACJ5212, 3pcs Measured portion: Inside the coil Contact carrying current: 10A, 15A, 20A Ambient temperature: 85°C 185°F




3.-(1) Distribution of pick-up and drop-out voltage


Sample: ACJ2112, 50pcs. Ambient temperature: Room temperature



1.-(4) Coil temperature rise (at 85°C 185°F) Sample: ACJ2212, 3pcs Measured portion: Inside the coil Contact carrying current: 10A, 15A, 20A Ambient temperature: 85°C 185°F




2.-(1) Ambient temperature and operating voltage range



3.-(2) Distribution of pick-up and drop-out voltage Sample: ACJ2212, 50pcs

Ambient temperature: Room temperature




5.-(1) Electrical life test (Motor free)


Sample: ACJ2212, 3pcs Load: Inrush current: 25A/Steady current: 5A,

Power window motor actual load (free condition) Tested voltage: 14V DC Switching frequency: ON 0.5s, OFF 9.5s Switching cycle: 2×10⁵


Ambient temperature: Room temperature Circuit




Load current waveform Inrush current: 25A, Steady current: 6A, Brake current: 13A




4.-(1) Distribution of operate and release time Sample: ACJ2112, 50pcs. Ambient temperature: Room temperature





Change of contact resistance



4.-(2) Distribution of operate and release time

*Without diode

🖾 Operate time

Release time

1 1.5 2 2.5 3 3.5 4 4.5 5 5.5 6 6.5 7 7.5

- Time, ms

Ambient temperature: Room temperature

Sample: ACJ2212, 50pcs.

50

40


30

20

10

0 0.5

Quantity, n



10

No. of operations, $\times\,10^4$

2


0




Min.

20









10 Contact welding: 0 time Miscontact: 0 time > Pick-up and drop-out voltage, 8 Pick-up voltage Max 6 Min. Drop-out voltage Max X 4 Min 2 0 5 10 No. of operations, × 104

Change of pick-up and drop-out voltage

Change of contact resistance



Load current waveform Current value: 25A




DIMENSIONS (mm inch)

1. Twin type (8-pin)


CAD Data



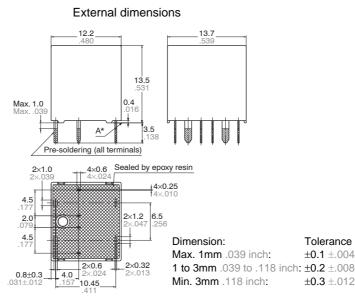



PC board pattern (Bottom view)



Tolerance: ±0.1 ±.004

Schematic (Bottom view)




Tolerance


±0.1 ±.004

±0.3 ±.012


Dimensions (thickness and width) of terminal is measured before pre-soldering. Intervals between terminals is measured at A surface level.

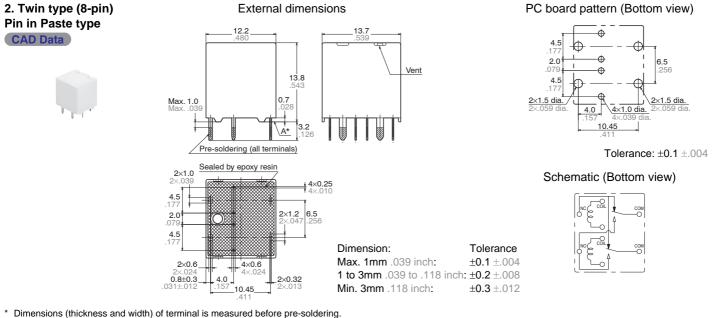


Dimensions (thickness and width) of terminal is measured before pre-soldering. Intervals between terminals is measured at A surface level.

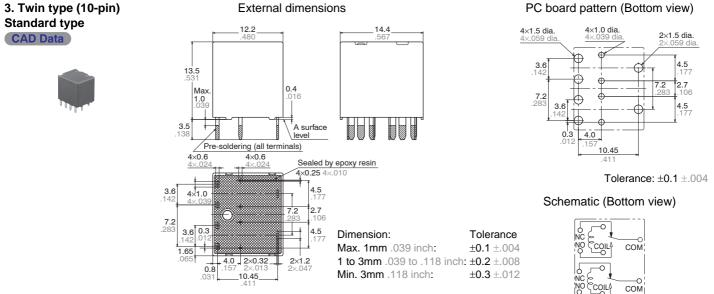

Dimensions (thickness and width) of terminal is measured before pre-soldering. Intervals between terminals is measured at A surface level.

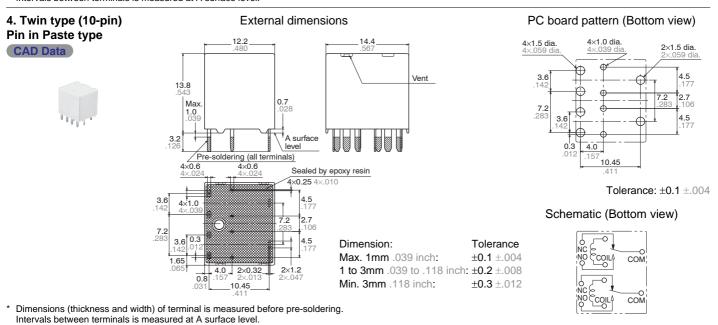

6

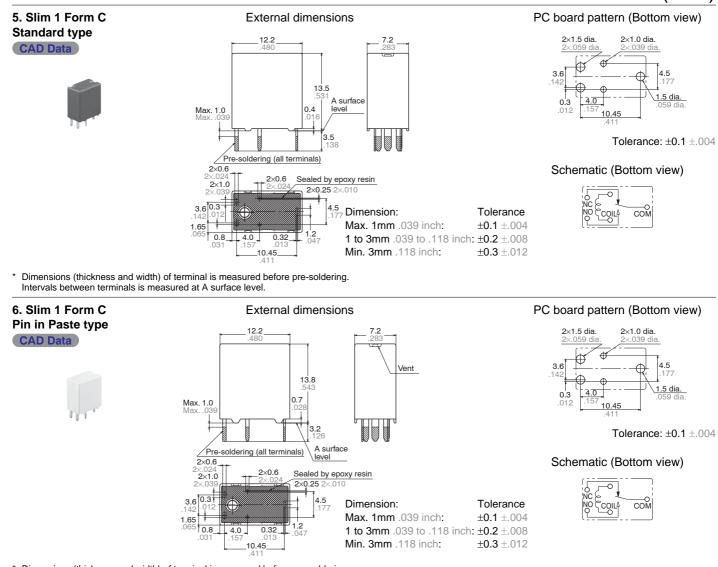


Dimensions (thickness and width) of terminal is measured before pre-soldering. Intervals between terminals is measured at A surface level.


NOTES

Assembly and cleaning conditions for Pin-in-Paste type

1) Example of the recommended conditions for automated assembly is shown below.

• Temperature profile during reflowsoldering (Recommended)





· Cautions for mounting


Temperature rise of relay itself may vary according to the mounting level or the heating method of reflow equipment. Therefore, please set the temperature of soldering portion of relay terminal and the top surface of the relay case not to exceed the above mentioned soldering condition. It is recommended to check the temperature rise of each portion under actual mounting condition before use.

2) Cleaning or coating should be avoided. Because "Pin-in-Paste" type is not a sealed type. Also, use caution for avoiding penetration of soldering flux into the interior of the relay.

 $t_1 = 60$ to 120 sec. $t_2 = Less than 40$ sec.

EXAMPLE OF CIRCUIT

Forward/reverse control circuits of DC motor (for 1 Form C \times 2 (8 terminal) type)



For Cautions for Use, see Relay Technical Information.