
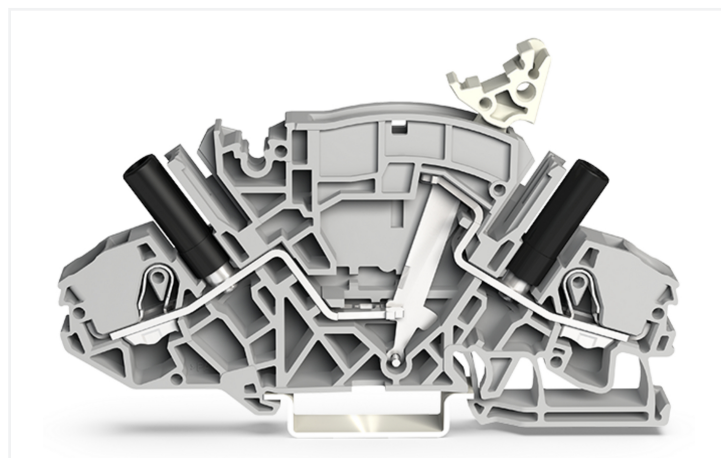


## Data Sheet | Item Number: 2007-8811/046-000

2-conductor disconnect/test terminal block; e.g., voltage transformer circuits; with touch-proof test sockets; for 4 mm Ø test plugs; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm<sup>2</sup>; Push-in CAGE CLAMP®; 6,00 mm<sup>2</sup>; gray

<https://www.wago.com/2007-8811/046-000>

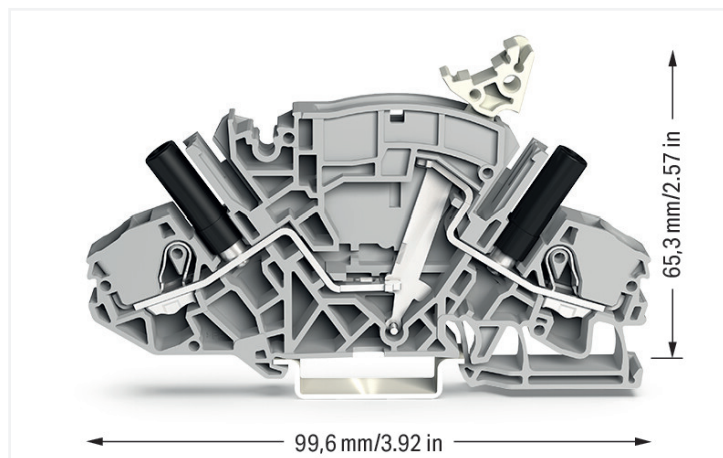

Color: ■ gray

Voltage transformer terminal block, 2007 Series, gray

This voltage transformer terminal block (item number 2007-8811/046-000) simplifies electrical installations. Conductors should only be connected to this voltage transformer terminal block if their strip length is between 13 and 15 mm. This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® technology provides a universal connection solution for any type of conductor. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. Depending on the type of conductor, this voltage transformer terminal block is designed for conductor cross sections ranging from 0.5 mm<sup>2</sup> to 10 mm<sup>2</sup>.

### Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	500 V	-	-
Rated impulse withstand voltage	6 kV	-	-
Rated current	30 A	-	-

Approvals per	UL 1059		
Use group	B	C	D
Rated voltage	300 V	300 V	300 V
Rated current	30 A	30 A	10 A

Approvals per	CSA 22.2 No 158		
Use group	B	C	D
Rated voltage	300 V	300 V	300 V
Rated current	30 A	30 A	10 A

Power Loss	
Power loss, per pole (potential)	0.702 W
Rated current I <sub>N</sub> for power loss specification	30 A
Resistance value for specified, current-dependent power loss	0.00078 Ω

### General information

Wiring direction: Front-entry wiring

### Connection Data

Clamping units	2
Total number of potentials	2
Number of levels	1
Number of jumper slots	2

### Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	6 mm <sup>2</sup> / 10 AWG
Solid conductor	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Solid conductor; push-in termination	1 ... 10 mm <sup>2</sup> / 14 ... 8 AWG
Fine-stranded conductor	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 6 mm <sup>2</sup> / 20 ... 10 AWG
Fine-stranded conductor; with uninsulated ferrule	1.5 ... 6 mm <sup>2</sup> / 16 ... 10 AWG
Fine-stranded conductor; with ferrule; push-in termination	2.5 ... 6 mm <sup>2</sup> / 16 ... 10 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inches
Wiring direction	Front-entry wiring

### Physical data

Width	8 mm / 0.315 inches
Height	99.6 mm / 3.921 inches
Depth from upper-edge of DIN-rail	65.3 mm / 2.571 inches

### Mechanical data

Mounting type	DIN-35 rail
Marking level	Center/side marking

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.381 MJ
Weight	27.9 g
Test socket color	black

### Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data	
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055144059410
Customs tariff number	85365080000

Product Classification	
UNSPSC	39121402
ETIM 9.0	EC000902
ETIM 10.0	EC000902
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	16e8b001-3903-4884-aad3-425c9f6110e5
SCIP notification number (Belgium)	4e5bf909-4272-4d18-ada5-e9f80cde7da7
SCIP notification number (Bulgaria)	3f160aa9-5536-45a9-a74a-75158a8fa646
SCIP notification number (Czech Republic)	c7841c0f-e916-4917-8b7d-7c0c441e8837
SCIP notification number (Denmark)	0cc4719a-2c0a-405a-bc9b-d10873d612d8
SCIP notification number (Finland)	d083cf67-70eb-4e18-85fa-5eb072137b62
SCIP notification number (France)	13bdb892-3c57-4985-81b4-eab58854e10c
SCIP notification number (Germany)	04ca1aa4-0bb5-46e5-8582-ef28826f633a
SCIP notification number (Hungary)	e32ce56d-361d-448f-aa70-3427a73118e4
SCIP notification number (Italy)	c286f2ab-bb43-4cda-a62c-addf50c157e1
SCIP notification number (Netherlands)	b9ec1a49-c76d-4403-8af8-d27fef508e9f
SCIP notification number (Poland)	0270baa7-f319-4523-8d81-c0b00b0e0536
SCIP notification number (Romania)	6f1fc56e-2d15-4777-9171-0520a97fdb66
SCIP notification number (Sweden)	39a1e77e-065b-49cb-8b38-c7dfd18eb5ee

### Approvals / Certificates

General approvals		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL-8021
CSA DEKRA Certification B.V.	C22.2 No. 158	70009679
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-131652
UL UL International Germany GmbH	UL 1059	E45172

Declarations of conformity and manufacturer's declarations		
Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

**Approvals for marine applications**



Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2
PRS Polski Rejestr Statków	-	TE/1094/880590/23

**Downloads**

**Environmental Product Compliance**

Compliance Search
Environmental Product Compliance 2007-8811/046-000

**CAD/CAE-Data**

CAD data
2D/3D Models 2007-8811/046-000

**1 Compatible Products**

**1.1 Required Accessories**

**1.1.1 End plate**

**1.1.1.1 End plate**



**Item No.: 2007-8893**  
End plate; 1.5 mm thick; with lock-out seal option; gray

**Item No.: 2007-8894**  
End plate; 1.5 mm thick; with lock-out seal option; orange

**Item No.: 2007-8891**  
End plate; 1.5 mm thick; without lock-out seal option; gray

**Item No.: 2007-8892**  
End plate; 1.5 mm thick; without lock-out seal option; orange

**1.2 Optional Accessories**

**1.2.1 DIN-rail**

**1.2.1.1 Mounting accessories**



**Item No.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



**Item No.: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



**Item No.: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



**Item No.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



**Item No.: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



**Item No.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



**Item No.: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



**Item No.: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

## 1.2.2 Installation

### 1.2.2.1 Cover



**Item No.: 709-156**

Cover, Type 3; suitable for cover carrier, type 3; 1 m long; transparent

### 1.2.2.2 Cover carrier



**Item No.: 709-169**

Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

## 1.2.3 Jumper

### 1.2.3.1 Jumper



**Item No.: 282-440**

Jumper; 10-way; insulated; orange



**Item No.: 282-432**

Jumper; 2-way; insulated; orange



**Item No.: 282-432/100-000**

Jumper; 2-way; insulated; orange



**Item No.: 282-433**

Jumper; 3-way; insulated; orange



**Item No.: 282-433/100-000**

Jumper; 3-way; insulated; orange



**Item No.: 282-434**

Jumper; 4-way; insulated; orange



**Item No.: 282-434/100-000**

Jumper; 4-way; insulated; orange



**Item No.: 282-435**

Jumper; 5-way; insulated; orange



**Item No.: 282-436**

Jumper; 6-way; insulated; orange



**Item No.: 282-437**

Jumper; 7-way; insulated; orange



**Item No.: 282-438**

Jumper; 8-way; insulated; orange



**Item No.: 282-439**

Jumper; 9-way; insulated; orange



**Item No.: 282-435/011-000**

Jumper; insulated; orange



**Item No.: 282-435/300-000**

Jumper; insulated; orange



**Item No.: 282-435/301-000**

Jumper; insulated; orange



**Item No.: 282-436/301-000**

Jumper; insulated; orange



**Item No.: 282-436/304-000**

Jumper; insulated; orange



**Item No.: 282-437/011-000**

Jumper; insulated; orange



**Item No.: 282-437/012-000**

Jumper; insulated; orange



**Item No.: 282-438/300-000**

Jumper; insulated; orange



**Item No.: 282-438/301-000**

Jumper; insulated; orange



**Item No.: 282-439/011-000**

Jumper; insulated; orange

## 1.2.4 Locking system

### 1.2.4.1 Locking system



**Item No.: 210-254**

Interlocking link; mechanically locks multiple links; 1 m long; transparent

**Item No.: 282-881**

Locking cover; mechanically locks multiple links; 1-pole; transparent

**Item No.: 282-882**

Locking cover; mechanically locks multiple links; 2-pole; transparent

**Item No.: 282-883**

Locking cover; mechanically locks multiple links; 3-pole; transparent



**Item No.: 282-884**

Locking cover; mechanically locks multiple links; 4-pole; transparent

**Item No.: 282-885**

Locking cover; mechanically locks multiple links; 5-pole; transparent

**Item No.: 282-886**

Locking cover; mechanically locks multiple links; 6-pole; transparent

**Item No.: 282-887**

Locking cover; mechanically locks multiple links; 7-pole; transparent



**Item No.: 282-888**

Locking cover; mechanically locks multiple links; 8-pole; transparent

## 1.2.5 Lock-out

### 1.2.5.1 Locking system



**Item No.: 2007-8899**

Lock-out; for disconnect link; yellow

## 1.2.6 Marking

### 1.2.6.1 Marker



**Item No.: 793-501/000-006**

WMB marking card; as card; not stretchable; plain; snap-on type; blue

**Item No.: 793-501/000-007**

WMB marking card; as card; not stretchable; plain; snap-on type; gray

**Item No.: 793-501/000-023**

WMB marking card; as card; not stretchable; plain; snap-on type; green

**Item No.: 793-501/000-017**

WMB marking card; as card; not stretchable; plain; snap-on type; light green



**Item No.: 793-501/000-012**

WMB marking card; as card; not stretchable; plain; snap-on type; orange

**Item No.: 793-501/000-005**

WMB marking card; as card; not stretchable; plain; snap-on type; red

**Item No.: 793-501/000-024**

WMB marking card; as card; not stretchable; plain; snap-on type; violet

**Item No.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white



**Item No.: 793-501/000-002**

WMB marking card; as card; not stretchable; plain; snap-on type; yellow

**Item No.: 2009-115/000-006**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

**Item No.: 2009-115/000-007**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

**Item No.: 2009-115/000-023**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



**Item No.: 2009-115/000-017**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

**Item No.: 2009-115/000-012**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

**Item No.: 2009-115/000-024**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

**Item No.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



**Item No.: 2009-115/000-002**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

### 1.2.6.2 Marker carrier



**Item No.: 2009-198**

Adaptor; gray

### 1.2.6.3 Marking strip



**Item No.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

## 1.2.7 Protective warning marker

### 1.2.7.1 Cover



**Item No.: 2006-115**

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

## 1.2.8 Screwless end stop

### 1.2.8.1 Mounting accessories



**Item No.: 249-117**

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



**Item No.: 249-116**

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

## 1.2.9 Tool

### 1.2.9.1 Operating tool




**Item No.: 210-721**

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured



## Installation Notes

### Commoning



Additional commoning option on the transformer side

### Security



Lock-out prevents accidental operation of disconnect link.

Lock-out snaps into one of two notched positions.


### Locking system




Using locking covers or profiles for adjacent terminal blocks allows disconnect links to be operated simultaneously.

A lock-out seal can be used on the disconnect link in operating position I when combined with an end and separator plate (Item No. 2007-8893 or Item No. 2007-8894).

Interlocking link mechanically locks multiple links for multi-pole switching applications.



Disconnect/Test Terminal Block (2007-8811)




#### Example for voltage transformer testing Measuring set for single-phase voltage transformer testing

Terminal blocks required:  
 1 x disconnect/test terminal block (2007-8811)  
 1 x through terminal block (2007-8801)  
 1 x end plate, orange (2007-8892)  
 In addition: locking cover, lock-out

Disconnecting the voltage transformer from the circuit: Move disconnect link from operating position to measurement position.  
 Voltage measurement: Connecting a measurement device via test socket on the meter side can only be performed after disconnection is complete (measuring point).

### Marking



Marking via WMB Multi markers or marking strips.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)