


SEAL- TRIM

Our Seal-Trims are also built around the Thin-Trim capacitors. These capacitors are encased in a high performance polymer housing that is wave solderable and protects the trimmer from contamination.

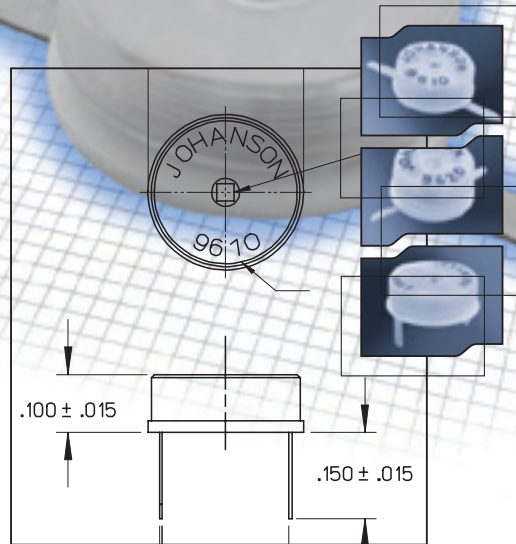

APPLICATIONS

- RF amplifier
- LC Filters and Networks
- Broadband Wireless LAN
- Medical Devices
- Cordless and Cellular phones
- DR/Crystal Oscillator
- Microstrip line filters


CHARACTERISTICS

- Working Voltage: 250 VDC (500 VDC Test)
- Long Rotational life
- Insulation Resistance: $> 10^4 \text{ M}\Omega$
- Temperature Range: -55°C to $+125^\circ\text{C}$
- RoHS Compliant parts available

SERIES	DISK SIZE	CAPACITANCE AVAILABLE	TUNING RESOLUTION
9610/9810	.270" (6.86 mm)	1 to 50 pF	180°
9620/9820	.180" (4.57 mm)	.5 to 25 pF	180°


9610 SERIES

TUNING TOOL: 4193

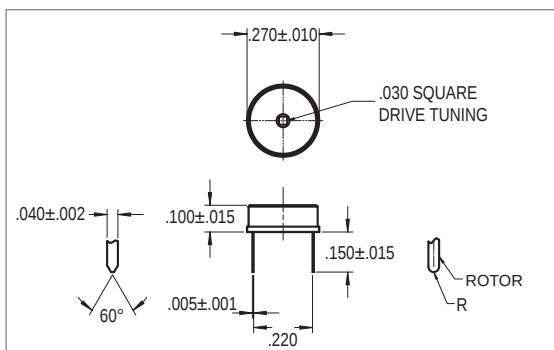

JMC P/N	RANGE PF	MIN Q @100MHZ
9610	9610SL	1.5 TO 4.5
9611	9611SL	2.5 TO 10.0
9612	9612SL	4.0 TO 18.0
9613	9613SL	6.0 TO 35.0
9614	9614SL	7.0 TO 40.0
9615	9615SL	5.0 TO 25.0
9616	9616SL	8.0 TO 50.0


SL

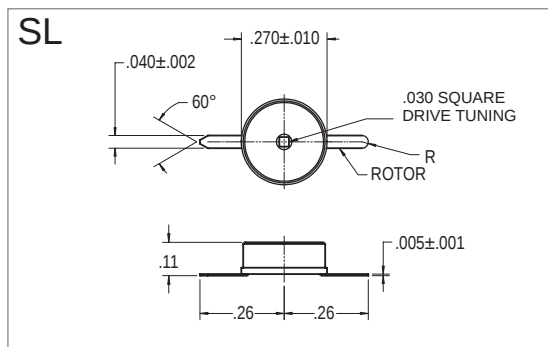

ROHS	RANGE PF	MIN Q @100MHZ
9810	9810SL	1.5 TO 4.5
9811	9811SL	2.5 TO 10.0
9812	9812SL	4.0 TO 18.0
9813	9813SL	6.0 TO 35.0
9814	9814SL	7.0 TO 40.0
9815	9815SL	5.0 TO 25.0
9816	9816SL	10.5 TO 50.0


9620 SERIES

TUNING TOOL: 4192

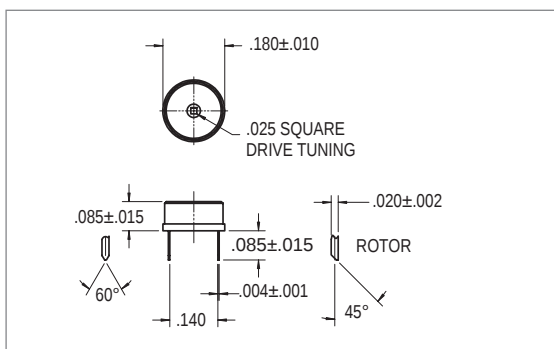

JMC P/N	RANGE PF	MIN Q @100MHZ
9620	9620SL	0.5 TO 2.5
9621	9621SL	1.0 TO 5.0
9622	9622SL	2.5 TO 10.0
9626	9626SL	8.5 TO 25.0
9628	9628SL	5.0 TO 15.0
9629	9629SL	7.5 TO 18.0

SL

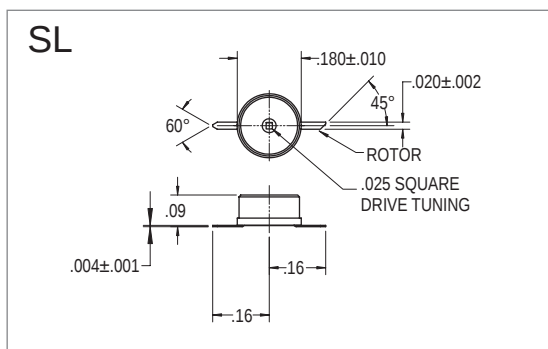

ROHS	RANGE PF	MIN Q @100MHZ
9820	9820SL	0.5 TO 2.5
9821	9821SL	1.0 TO 5.0
9822	9822SL	2.5 TO 10.0
9826	9826SL	8.5 TO 25.0
9828	9828SL	5.0 TO 15.0
9829	9829SL	7.5 TO 18.0

