



Features

- Miniature size
- High self-resonant frequency
- High current
- Low DCR
- AEC-Q200 compliant
- RoHS compliant* and halogen free**

Applications

- Automotive systems
- Noise filters
- DC power lines

CWF1610A Series – 0603 Chip Inductors


Electrical Specifications @ 25 °C

Bourns Part No.	Inductance L (μH)	Q Typ.	L & Q Test Freq. / Voltage	SRF (MHz) Typ.	DCR (Ω) ±30 %	I _{rms} ² (mA) Typ.	Isat ³ (mA) Typ.
CWF1610A-R10x ¹	0.10	13	7.9 MHz / 0.5 V	1150	0.063	1400	1700
CWF1610A-R15x	0.15			1050	0.074	1300	1700
CWF1610A-R27x	0.27			1000	0.12	1100	1400
CWF1610A-R33x	0.33			1100	0.13	1000	1300
CWF1610A-R47x	0.47			900	0.18	900	1100
CWF1610A-R56x	0.56			630	0.20	800	1100
CWF1610A-R68x	0.68			510	0.22	750	900
CWF1610A-1R0x	1.0	16		390	0.32	700	860
CWF1610A-1R5x	1.5			160	0.40	600	720
CWF1610A-2R2x	2.2			103	0.56	580	600
CWF1610A-3R3x	3.3			66	0.70	500	500
CWF1610A-4R7x	4.7			51	0.97	420	400
CWF1610A-5R6x	5.6			47	1.10	380	380
CWF1610A-6R8x	6.8			43	1.50	340	340
CWF1610A-8R2x	8.2	14	2.5 MHz / 0.5 V	40	1.68	300	300
CWF1610A-100x	10			36	1.85	280	280
CWF1610A-150x	15			29	2.60	240	240
CWF1610A-180x	18			28	2.90	220	220
CWF1610A-220x	22			24	3.61	200	200

Notes:

1. "x" indicates Inductance Tolerance: K = ±10 %, M = ±20 %.
2. I_{rms}: Heat rated current (I_{rms}) will cause the coil temperature rise ≤40 °C without core loss.
3. Isat: Applying the current to coils, the inductance change shall be less than 20 % of initial value.

Product Dimensions

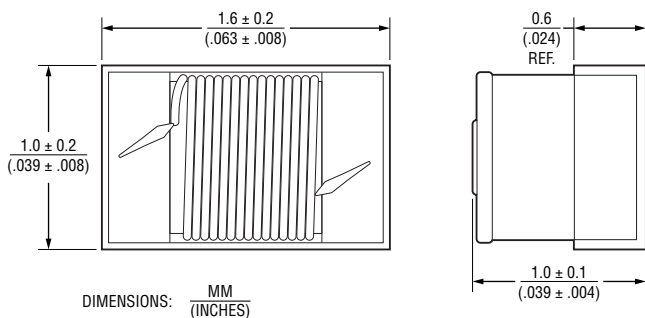

WARNING
Cancer and Reproductive Harm
www.P65Warnings.ca.gov

* RoHS Directive 2015/863, Mar 31, 2015 and Annex.

** Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at

www.bourns.com/docs/legal/disclaimer.pdf.

Additional Information

Click these links for more information:



General Specifications

Operating Temperature

..... -55 °C to +125 °C
(Temperature rise included)

Storage Temperature

..... -55 °C to +125 °C

Temperature Rise .. ≤40 °C at rated I_{rms}¹

Saturation Current

..... Inductance drops ≤20 % at Isat

Moisture Sensitivity Level..... 1

ESD Classification (HBM)..... N/A

Note 1: Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

Materials


Core..... Ferrite

Wire Enameled copper

Terminal Finish Sn

Packaging..... 4000 pcs. per 7-inch reel

Electrical Schematic



How to Order

CWF1610A - R10 K

Model _____


Value Code (see table) _____

Tolerance _____

K = ±10 %

M = ±20 %


Recommended Layout



CWF1610A Series – 0603 Chip Inductors

BOURNS®


Soldering Profile

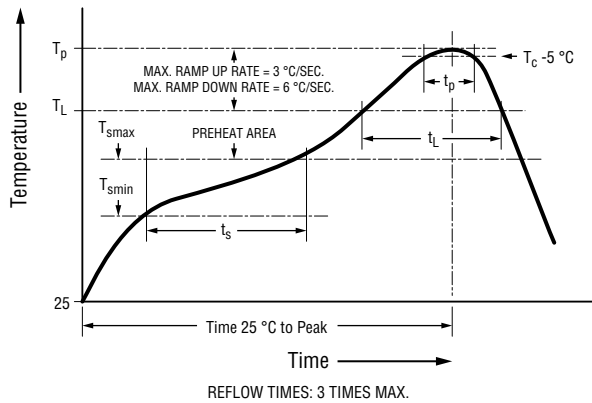


Profile Feature	Pb Free Assembly
Preheat - Temperature Min. (T_{smin}) - Temperature Max. (T_{smax}) - Time(t_s) from T_{smin} to T_{smax}	150 °C 200 °C 60-120 seconds
Ramp-up Rate (T_L to T_p)	3 °C/second max.
Liquidous temperature (T_L) Time (t_L) maintained above T_L	217 °C 60-150 seconds
Reflow temperature	260 °C
Time (t_p) at $T_c - 5\text{ °C}$ (T_p should be equal to or less than T_c)	< 30 seconds
Ramp-Down Rate (T_p to T_L)	6 °C/second max.
Time 25 °C to Peak Temperature	8 minutes max.

Typical Curves

Inductance vs. Frequency

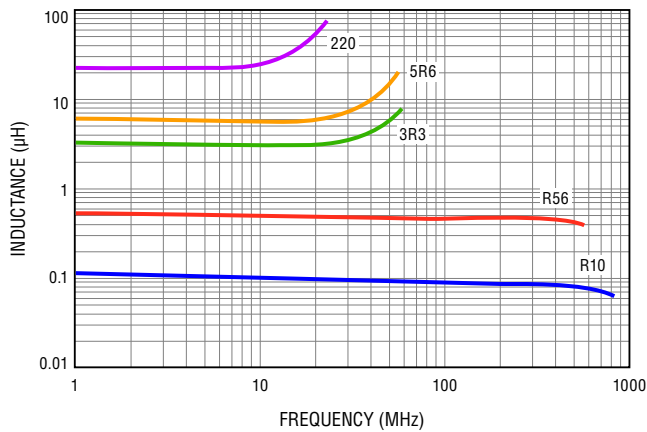

Q vs. Frequency

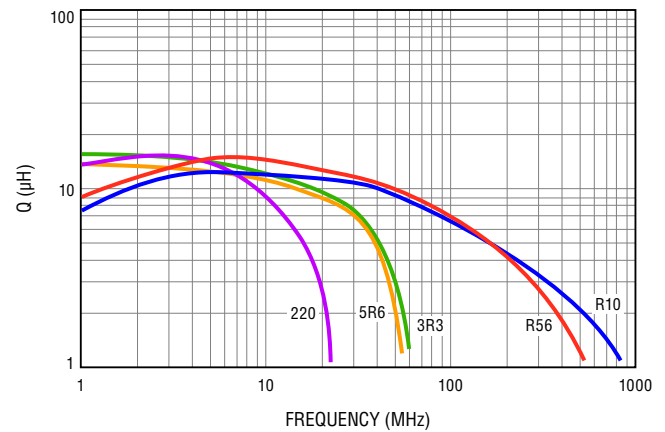

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

BOURNS®

Technical drawing of a 3-terminal SMD component showing top, bottom, and side views with dimensions in mm and inches.

Top View Dimensions:

- Overall width: 9.0 ± 0.5 mm ($.354 \pm .020$)
- Overall height: 178 ± 2 mm ($7.008 \pm .079$)
- Terminal width: 60 ± 2 mm ($2.362 \pm .079$)
- Terminal thickness: 13.5 ± 0.5 mm ($.531 \pm .020$)

Bottom View Dimensions:

- Terminal width: 1.75 ± 0.1 mm ($.069 \pm .004$)
- Terminal pitch: 2.0 ± 0.05 mm ($.079 \pm .002$)
- Terminal length: 4.0 ± 0.1 mm ($.157 \pm .004$)
- Terminal thickness: 4.0 ± 0.1 mm ($.157 \pm .004$)
- Terminal diameter: $1.5 + 0.1/-0$ mm ($.059 + .004/-0$) DIA.
- Terminal width: 1.78 ± 0.1 mm ($.070 \pm .004$)
- Terminal pitch: 1.21 ± 0.1 mm ($.048 \pm .004$)
- Terminal length: 0.7 ± 0.1 mm ($.028 \pm .004$) DIA.
- Terminal width: 8.0 ± 0.1 mm ($.315 \pm .004$)
- Terminal width: 3.5 ± 0.05 mm ($.138 \pm .002$)
- Terminal width: 0.2 ± 0.05 mm ($.008 \pm .002$)

Side View Dimensions:

- Terminal width: 1.21 ± 0.1 mm ($.048 \pm .004$)
- Terminal length: 0.7 ± 0.1 mm ($.028 \pm .004$) DIA.
- Terminal width: 8.0 ± 0.1 mm ($.315 \pm .004$)
- Terminal width: 3.5 ± 0.05 mm ($.138 \pm .002$)
- Terminal width: 0.2 ± 0.05 mm ($.008 \pm .002$)

Other Dimensions:

- COVER TAPE
- 5°

USER DIRECTION OF FEED

QTY: 4,000 PCS. PER REEL

DIMENSIONS: MM (INCHES)

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

USER DIRECTION OF FEED

QTY: 4,000 PCS. PER REEL

www.bourns.com

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <http://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <http://www.bourns.com/docs/Legal/disclaimer.pdf>