G3R30MT12K
1200 V 30 mΩ SiC MOSFET


Silicon Carbide MOSFET
N-Channel Enhancement Mode

V_{DS}	=	1200 V
$R_{DS(ON)(Typ.)}$	=	30 mΩ
$I_{D\ (T_C = 100°C)}$	=	50 A


Features

- G3R™ (3rd Generation) Technology
- Low Temperature Coefficient of $R_{DS(ON)}$
- Lower Q_G and Smaller $R_{G(INT)}$
- Low Device Capacitances (C_{OSS}, C_{RSS})
- LoRing™ - Electromagnetically Optimized Design
- Superior Cost-Performance Index
- Robust Body Diode with Low V_F and Low Q_{RR}
- 100% Avalanche (UIL) Tested

Package



TO-247-4



D = Drain
G = Gate
S = Source
KS = Kelvin Source

RoHS

REACH

Advantages

- Compatible with Commercial Gate Drivers
- Low Conduction Losses at all Temperatures
- Faster and More Efficient Switching
- Lesser Switching Spikes and Lower Losses
- Reduced Ringing
- Better Power Density and System Efficiency
- Ease of Paralleling without Thermal Runaway
- Superior Robustness and System Reliability

Applications

- Solar Inverters
- Motor Drives
- EV Charging
- High Voltage DC-DC Converters
- Switched Mode Power Supplies
- UPS
- Smart Grid Transmission and Distribution
- Induction Heating and Welding

Absolute Maximum Ratings (At T_C = 25°C Unless Otherwise Stated)

Parameter	Symbol	Conditions	Values	Unit	Note
Drain-Source Voltage	$V_{DS(max)}$	V_{GS} = 0 V, I_D = 100 µA	1200	V	
Gate-Source Voltage (Dynamic)	$V_{GS(max)}$		-10 / +22	V	
Gate-Source Voltage (Static)	$V_{GS(op)-ON}$ $V_{GS(op)-OFF}$	Recommended Operation	+15 to +18 -5 to -3	V	
Continuous Forward Current	I_D	T_C = 25°C, V_{GS} = -5 / +15 V T_C = 100°C, V_{GS} = -5 / +15 V T_C = 135°C, V_{GS} = -5 / +15 V	70 50 36	A	Fig. 15
Pulsed Drain Current	$I_{D(pulse)}$	t_P ≤ 3µs, D ≤ 1%, V_{GS} = 15 V, Note 1	200	A	Fig. 14
Power Dissipation	P_D	T_c = 25°C	281	W	Fig. 16
Non-Repetitive Avalanche Energy	E_{AS}	L = 2.0 mH, I_{AS} = 22.5 A	498	mJ	
Operating and Storage Temperature	T_j , T_{stg}		-55 to 175	°C	

Thermal/Package Characteristics

Parameter	Symbol	Conditions	Values			Unit	Note
			Min.	Typ.	Max.		
Thermal Resistance, Junction - Case	R_{thJC}				0.53	°C/W	Fig. 13
Weight	W_T			6.2		g	
Mounting Torque	T_M	Screws to Heatsink			1.1	Nm	

Downloaded from Arrow.com.

Electrical Characteristics (At T_C = 25°C Unless Otherwise Stated)

Parameter	Symbol	Conditions	Values			Unit	Note
			Min.	Typ.	Max.		
Drain-Source Breakdown Voltage	V_{DSS}	V_{GS} = 0 V, I_D = 100 µA	1200			V	
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 1200 V, V_{GS} = 0 V		1		µA	
Gate Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = 22 V V_{DS} = 0 V, V_{GS} = -10 V			100 -100	nA	
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 24.0 mA V_{DS} = V_{GS}, I_D = 24.0 mA, T_j = 175°C	1.8	2.70 2.05		V	Fig. 9
Transconductance	g_{fs}	V_{DS} = 10 V, I_D = 45 A V_{DS} = 10 V, I_D = 45 A, T_j = 175°C		21.0 23.6		S	Fig. 4
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS} = 15 V, I_D = 45 A V_{GS} = 15 V, I_D = 45 A, T_j = 175°C V_{GS} = 18 V, I_D = 45 A V_{GS} = 18 V, I_D = 45 A, T_j = 175°C		30 43 25 38	34	mΩ	Fig. 5-8
Input Capacitance	C_{iss}	V_{DS} = 800 V, V_{GS} = 0 V f = 1 MHz, V_{AC} = 25mV		3863		pF	Fig. 11
Output Capacitance	C_{oss}			117			
Reverse Transfer Capacitance	C_{rss}			9.4			
C_{oss} Stored Energy	E_{oss}			46		µJ	Fig. 12
C_{oss} Stored Charge	Q_{oss}			171		nC	
Effective Output Capacitance (Energy Related)	$C_{o(er)}$			144		pF	Note 2
Effective Output Capacitance (Time Related)	$C_{o(tr)}$			214			
Gate-Source Charge	Q_{gs}	V_{DS} = 800 V, V_{GS} = -5 / +15 V I_D = 45 A Per IEC607478-4		43		nC	Fig. 10
Gate-Drain Charge	Q_{gd}			51			
Total Gate Charge	Q_g			118			
Internal Gate Resistance	$R_{G(int)}$	f = 1 MHz, V_{AC} = 25 mV		1.2		Ω	
Turn-On Switching Energy (Body Diode)	E_{On}	T_j = 25°C, V_{GS} = -5/+15V, $R_{G(ext)}$ = 3 Ω, L = 40.0 µH, I_D = 45 A, V_{DD} = 800 V		298		µJ	Fig. 22,26
Turn-Off Switching Energy (Body Diode)	E_{Off}			97			
Turn-On Delay Time	$t_{d(on)}$	V_{DD} = 800 V, V_{GS} = -5/+15V $R_{G(ext)}$ = 3 Ω, L = 40.0 µH, I_D = 45 A Timing relative to V_{DS}, Inductive load		36		ns	Fig. 24
Rise Time	t_r			11			
Turn-Off Delay Time	$t_{d(off)}$			20			
Fall Time	t_f			8			

Note 1: Pulse Width t_P Limited by $T_{j(max)}$

Note 2: $C_{o(er)}$, a lumped capacitance that gives same stored energy as C_{OSS} while V_{DS} is rising from 0 to 800V.
$C_{o(tr)}$, a lumped capacitance that gives same charging times as C_{OSS} while V_{DS} is rising from 0 to 800V.


Downloaded from Arrow.com.

Reverse Diode Characteristics

Parameter	Symbol	Conditions	Values			Unit	Note
			Min.	Typ.	Max.		
Diode Forward Voltage	V_{SD}	V_{GS} = -5 V, I_{SD} = 22 A V_{GS} = -5 V, I_{SD} = 22 A, T_j = 175°C		4.7 4.3		V	Fig. 17-18
Continuous Diode Forward Current	I_S	V_{GS} = -5 V, T_c = 100°C	28			A	
Diode Pulse Current	$I_{S(pulse)}$	V_{GS} = -5 V, Note 1		112		A	
Reverse Recovery Time	t_{rr}	V_{GS} = -5 V, I_{SD} = 45 A, V_R = 800 V dif/dt = 1000 A/µs, T_j = 25°C		24		ns	
Reverse Recovery Charge	Q_{rr}			159		nC	
Peak Reverse Recovery Current	I_{rrm}			6		A	
Reverse Recovery Time	t_{rr}	V_{GS} = -5 V, I_{SD} = 45 A, V_R = 800 V dif/dt = 1000 A/µs, T_j = 175°C		37		ns	
Reverse Recovery Charge	Q_{rr}			398		nC	
Peak Reverse Recovery Current	I_{rrm}			10		A	


Downloaded from Arrow.com.

Figure 1: Output Characteristics (T_j = 25°C)

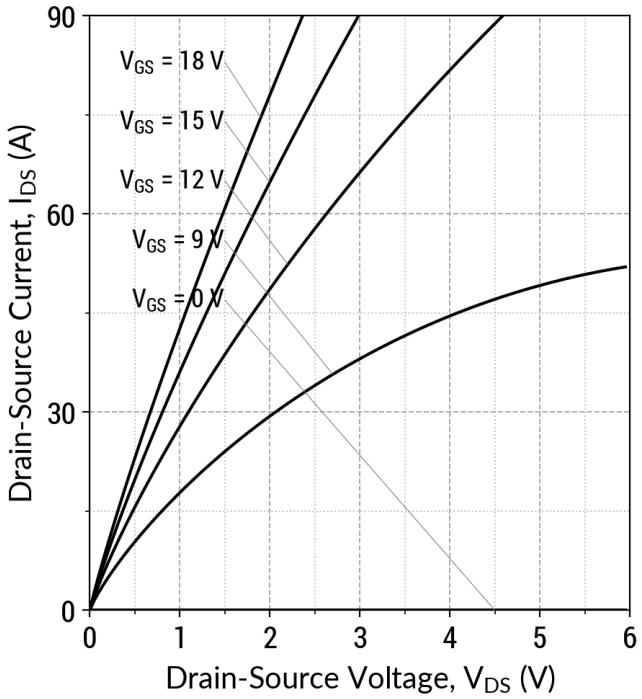


$I_D = f(V_{DS}, V_{GS})$; t_P = 250 µs

Figure 2: Output Characteristics (T_j = 175°C)

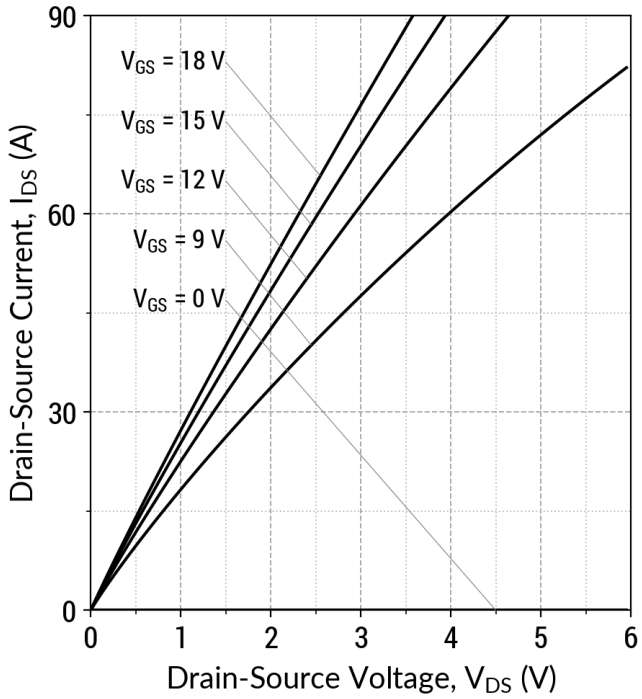


$I_D = f(V_{DS}, V_{GS})$; t_P = 250 µs

Figure 3: Output Characteristics (V_{GS} = 15 V)

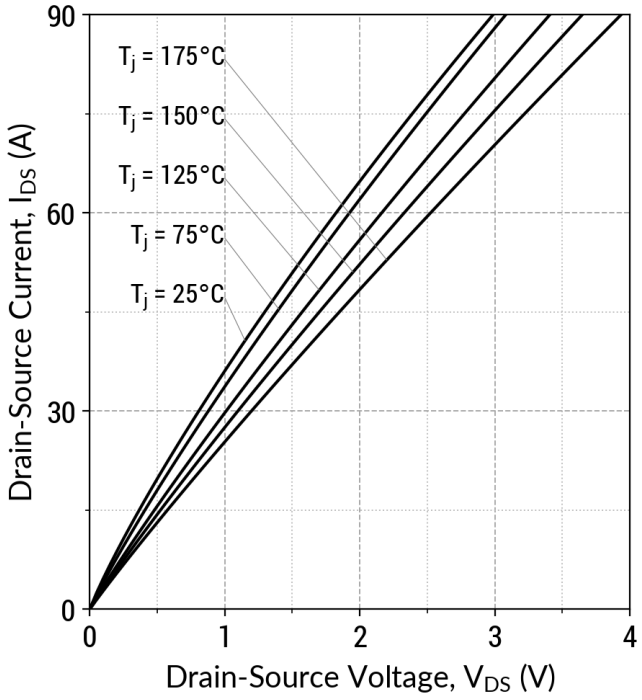

$I_D = f(V_{DS}, T_j)$; t_P = 250 µs


Figure 4: Transfer Characteristics (V_{DS} = 10 V)

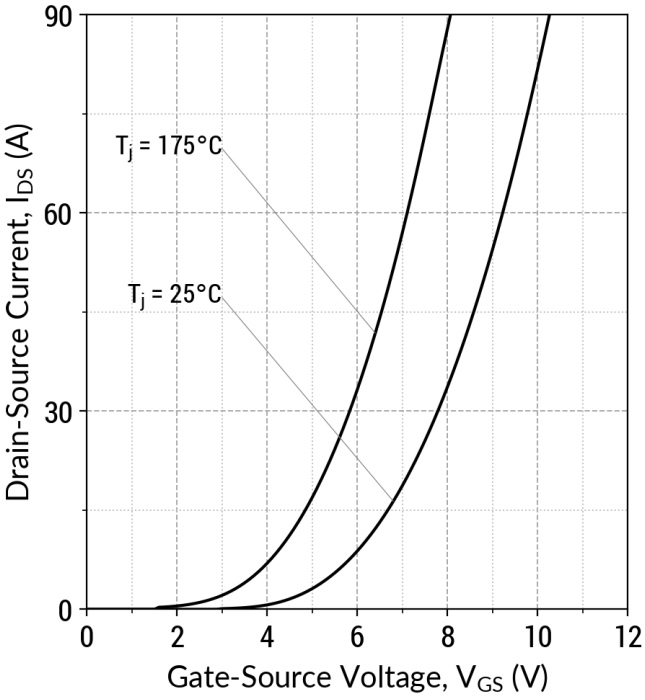

$I_D = f(V_{GS}, T_j)$; t_P = 100 µs


Downloaded from Arrow.com.

Figure 5: On-State Resistance v/s Temperature

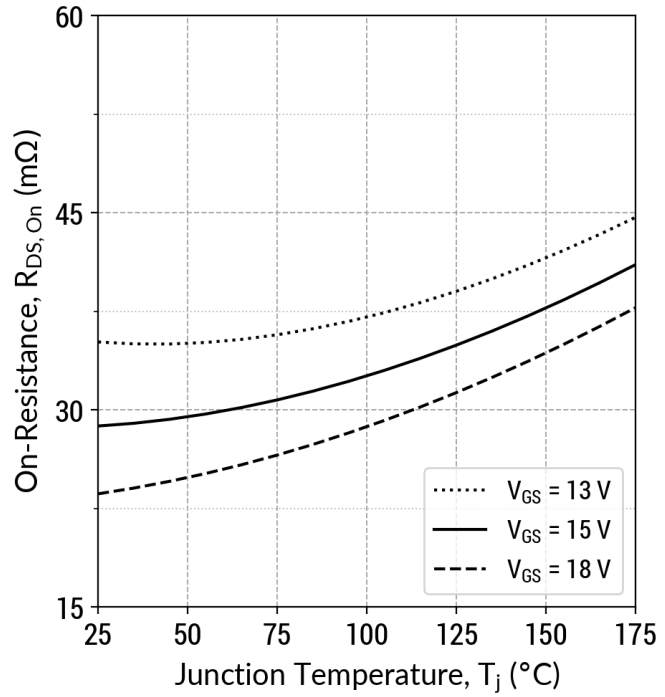


$R_{DS(ON)} = f(T_j, V_{GS})$; t_P = 250 µs; I_D = 45 A

Figure 6: On-State Resistance v/s Drain Current

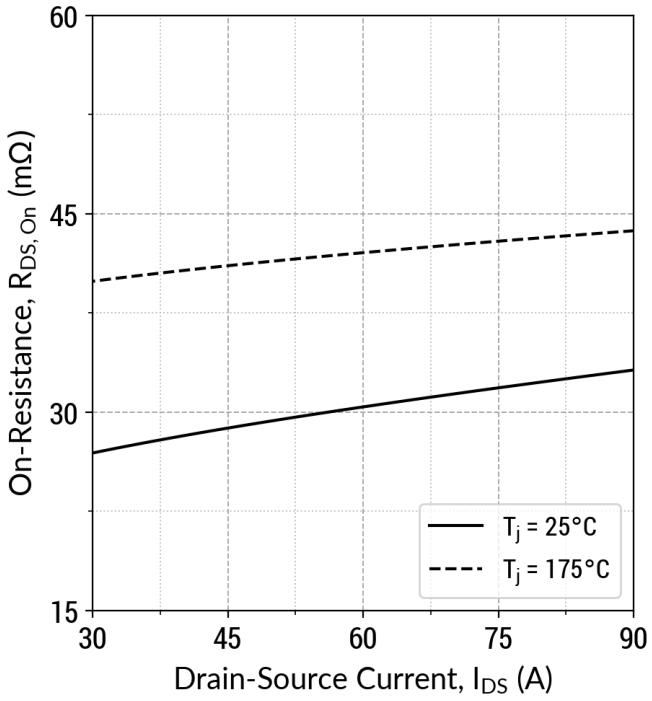


$R_{DS(ON)} = f(T_j, I_D)$; t_P = 250 µs; V_{GS} = 15 V

Figure 7: Normalized On-State Resistance v/s Temperature

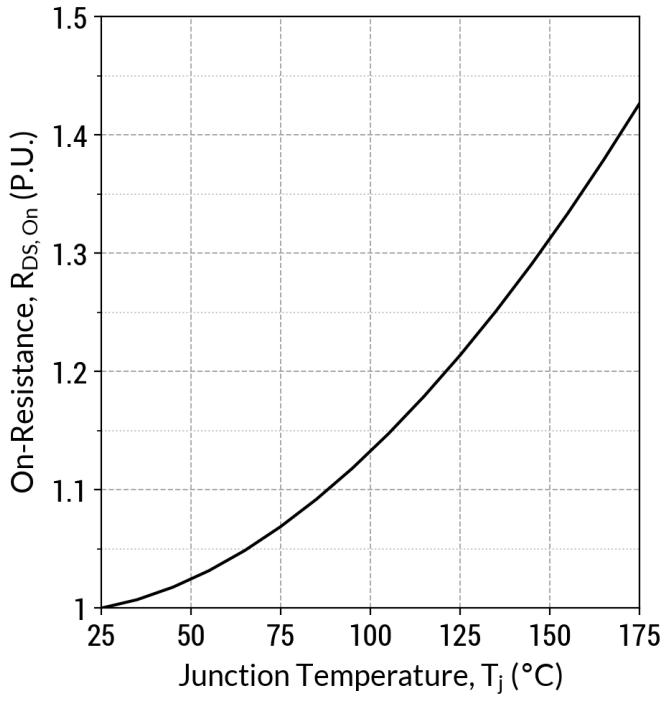

$R_{DS(ON)} = f(T_j)$; t_P = 250 µs; I_D = 45 A; V_{GS} = 15 V


Figure 8: On-State Resistance v/s Gate Voltage

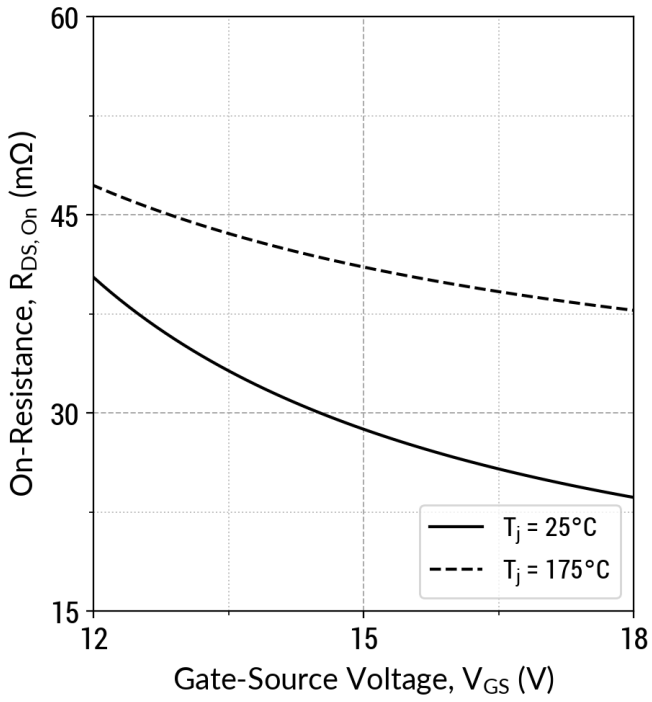

$R_{DS(ON)} = f(T_j, V_{GS})$; t_P = 250 µs; I_D = 45 A


Downloaded from Arrow.com.

Figure 9: Threshold Voltage Characteristics

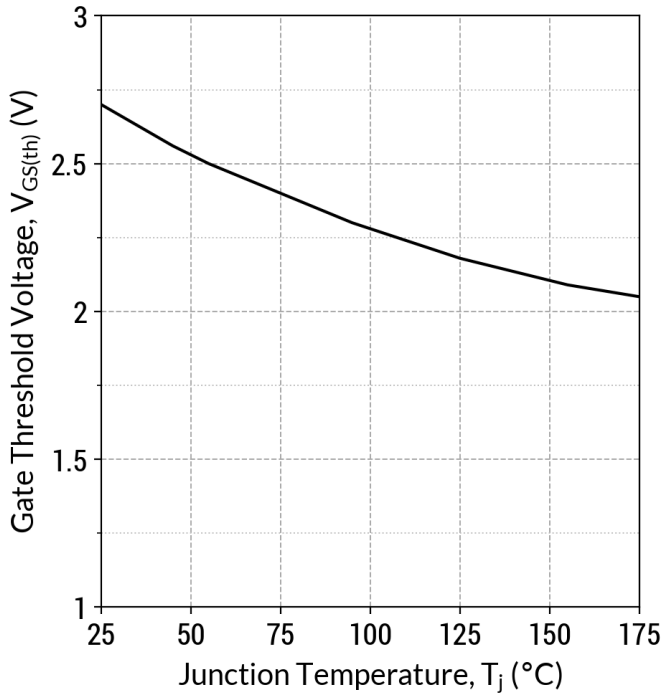


$V_{GS(th)} = f(T_j)$; $V_{DS} = V_{GS}$; $I_D = 24.0$ mA

Figure 10: Gate Charge Characteristics

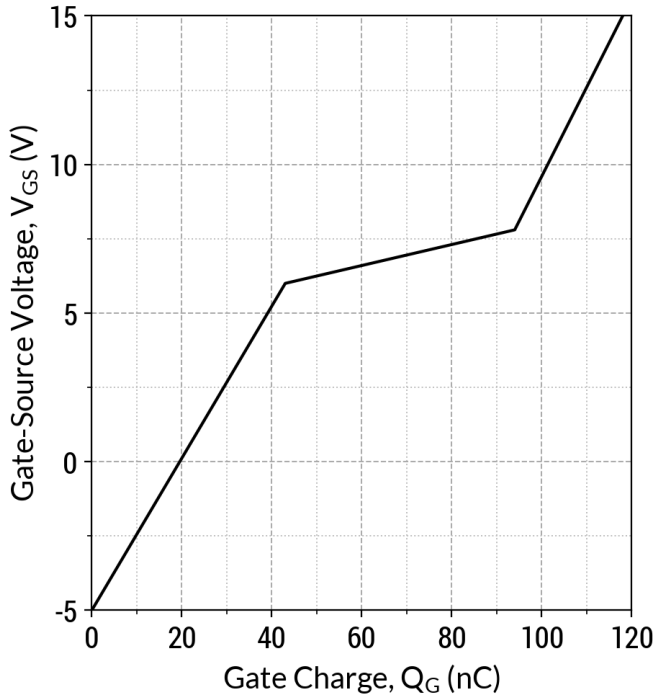


$I_D = 45$ A; $V_{DS} = 800$ V; $T_c = 25$°C

Figure 11: Capacitance v/s Drain-Source Voltage

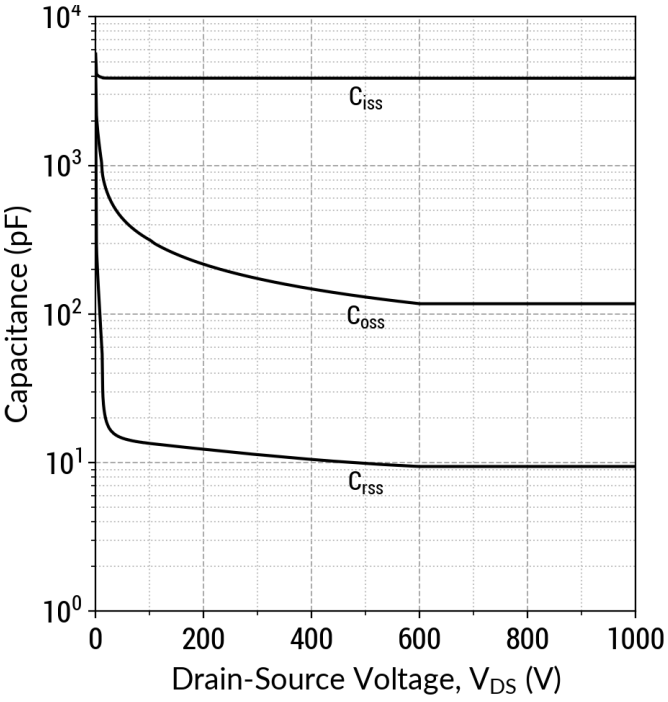

f = 1 MHz; V_{AC} = 25mV


Figure 12: Output Capacitor Stored Energy

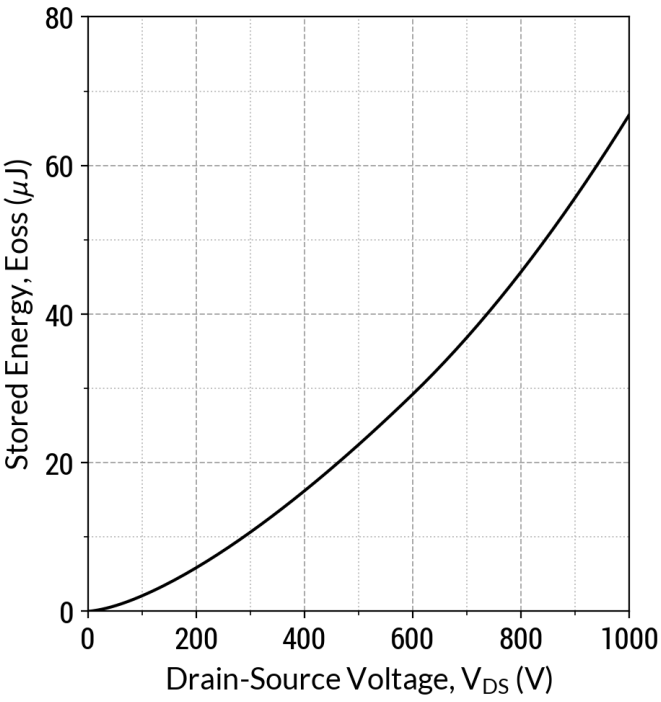

$E_{oss} = f(V_{DS})$


Downloaded from Arrow.com.

Figure 13: Transient Thermal Impedance

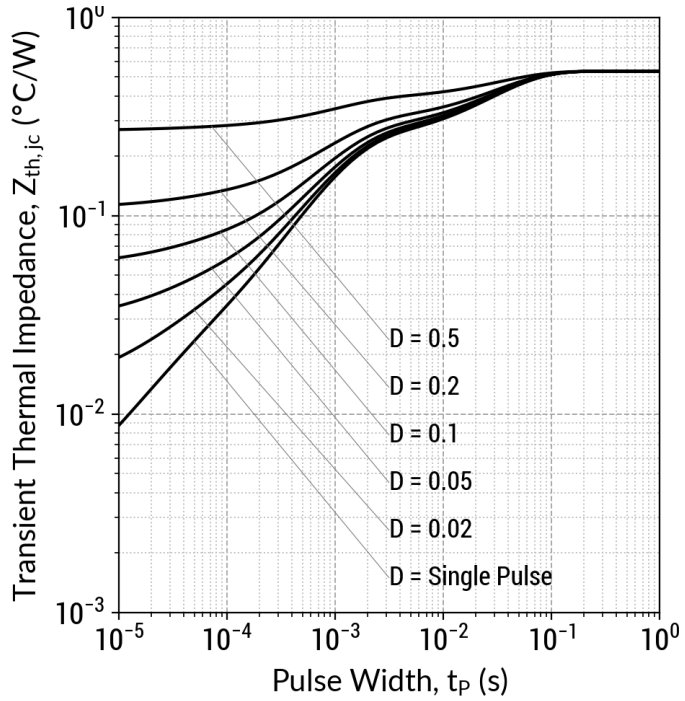


$Z_{th,jc} = f(t_P,D)$; $D = t_P/T$

Figure 14: Safe Operating Area (T_c = 25°C)

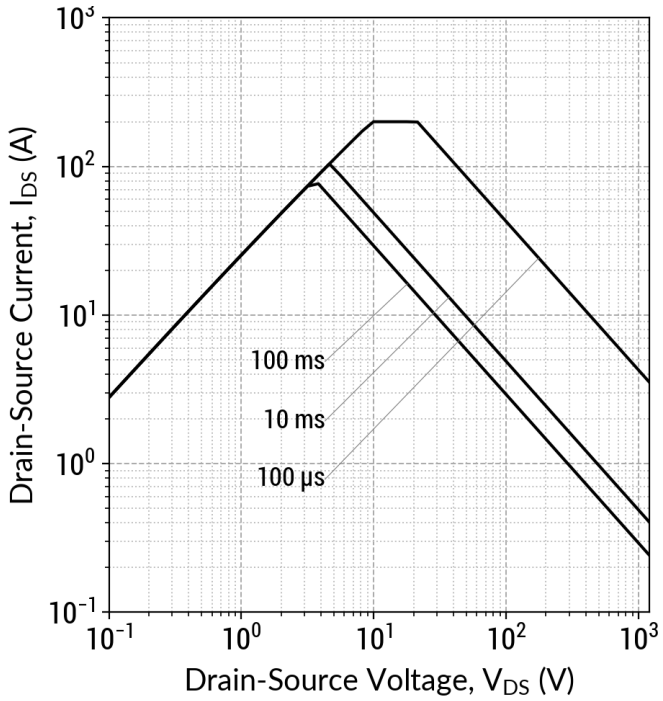


$I_D = f(V_{DS}, t_P)$; $T_j \leq 175°C$; $D = 0$

Figure 15: Current De-rating Curve

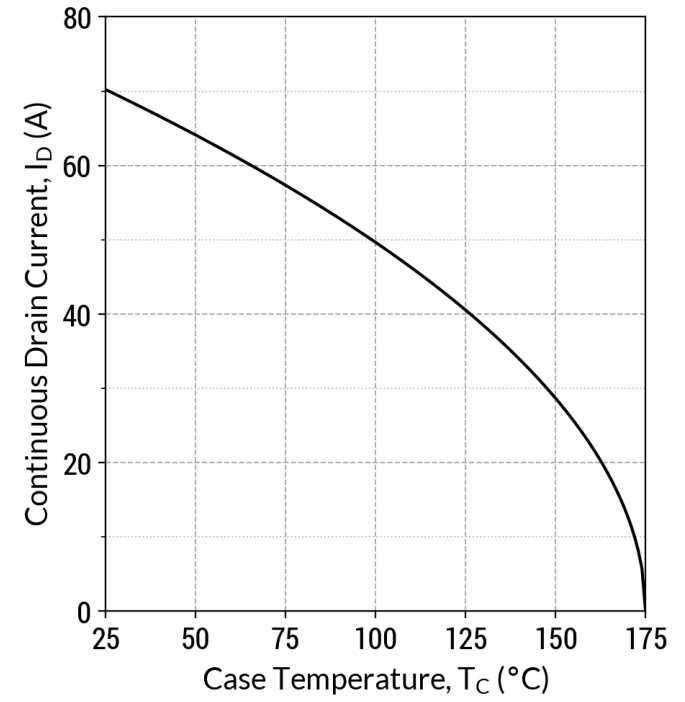

V_{GS} = 15 V; $I_D = f(T_C)$; $T_j \leq 175°C$


Figure 16: Power De-rating Curve

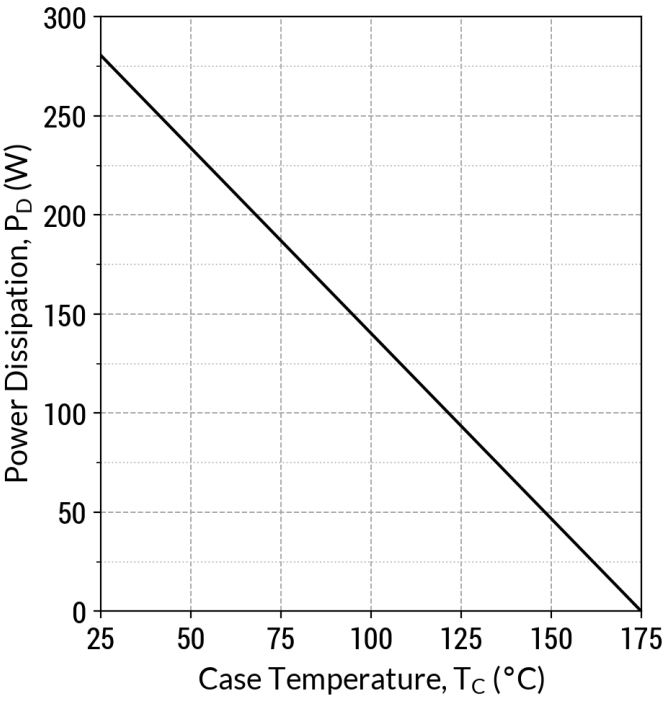

$P_D = f(T_C)$; $T_j \leq 175°C$


Downloaded from Arrow.com.

Figure 17: Body Diode Characteristics (T_j = 25°C)

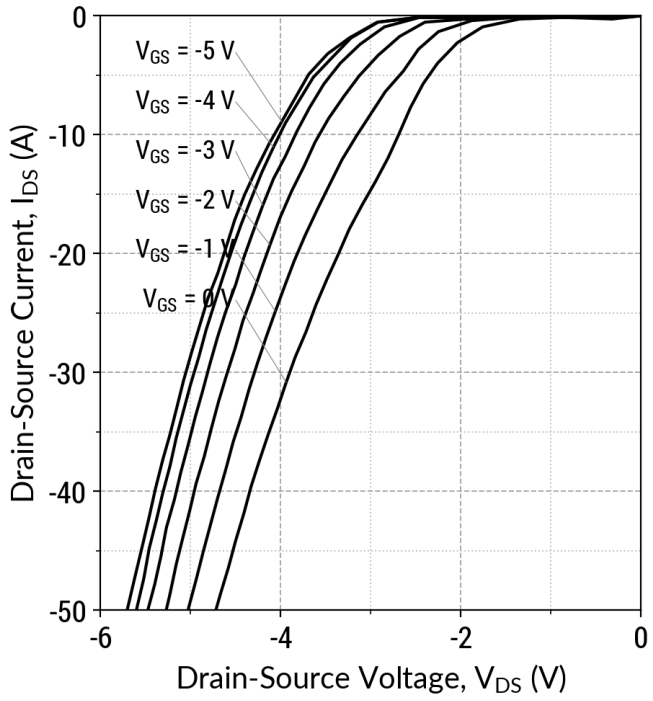


$I_D = f(V_{DS}, V_{GS})$; t_P = 250 µs

Figure 18: Body Diode Characteristics (T_j = 175°C)

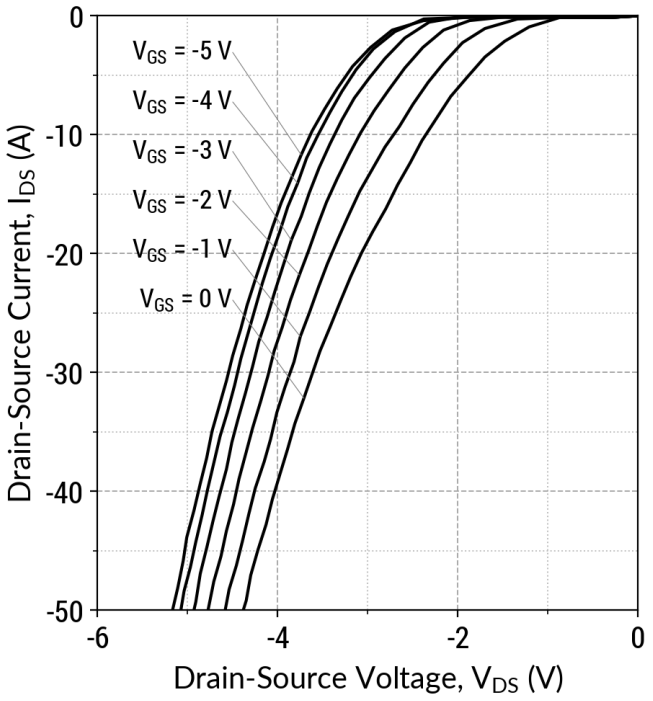


$I_D = f(V_{DS}, V_{GS})$; t_P = 250 µs

Figure 19: Third Quadrant Characteristics (T_j = 25°C)

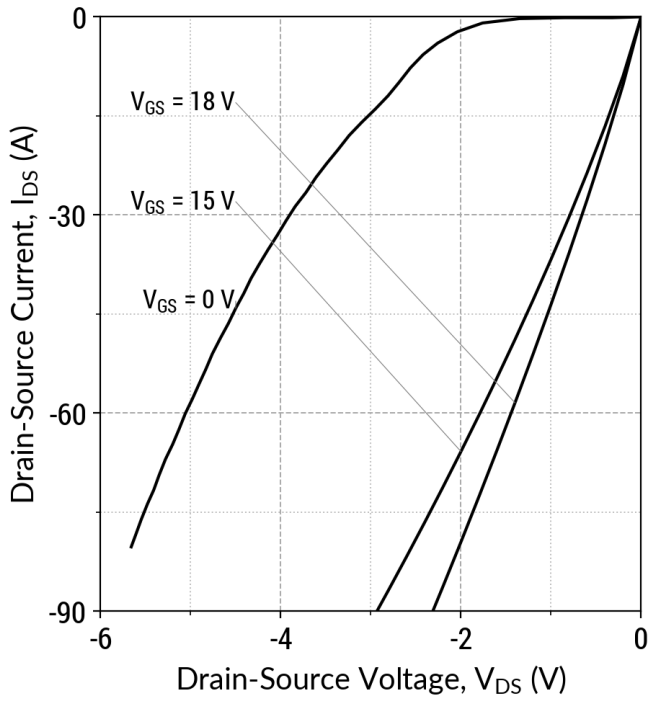

$I_D = f(V_{DS}, V_{GS})$; t_P = 250 µs


Figure 20: Third Quadrant Characteristics (T_j = 175°C)

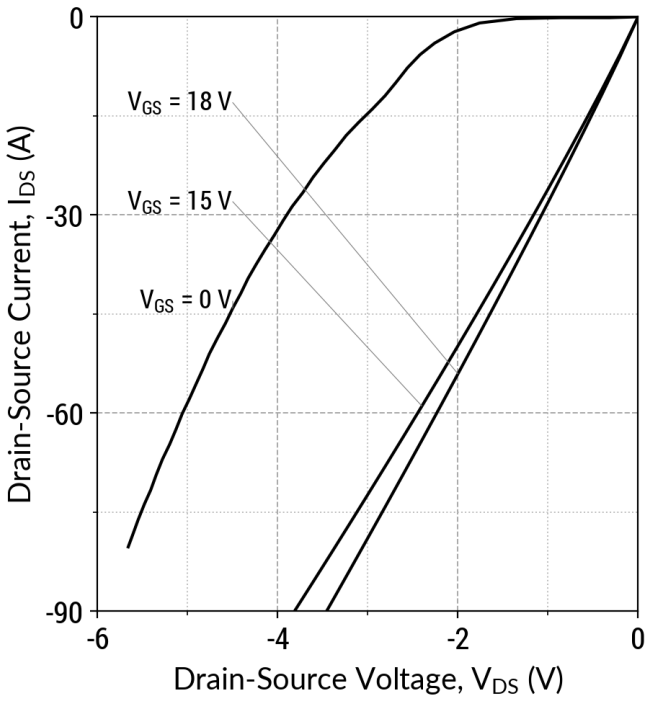

$I_D = f(V_{DS}, V_{GS})$; t_P = 250 µs


Downloaded from Arrow.com.

Figure 21: Inductive Switching Energy v/s Drain Current (V_{DD} = 600V)

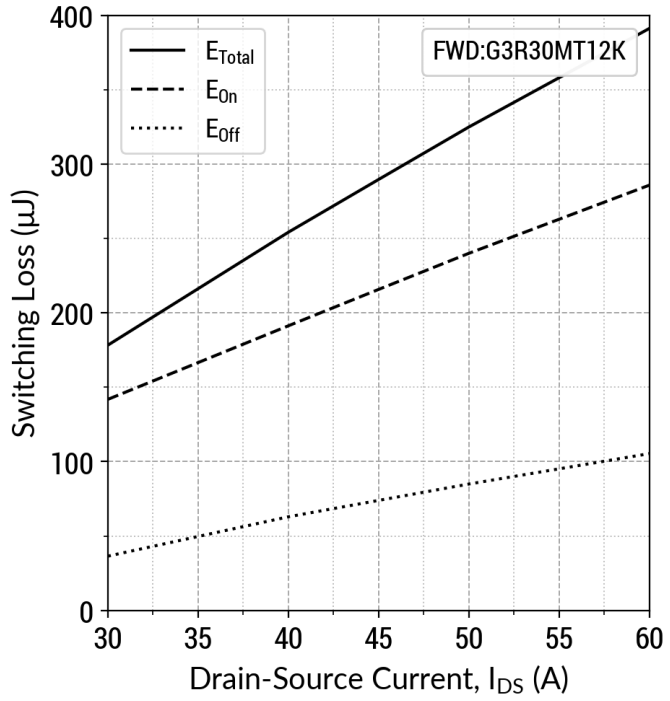


T_j = 25°C; V_{GS} = -5/+15V; $R_{G(ext)}$ = 3 Ω; L = 40.0µH

Figure 22: Inductive Switching Energy v/s Drain Current (V_{DD} = 800V)

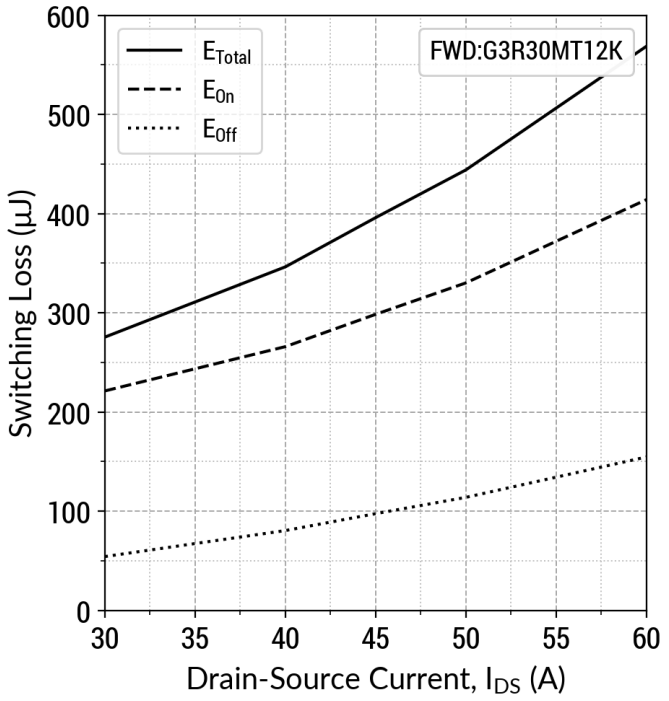


T_j = 25°C; V_{GS} = -5/+15V; $R_{G(ext)}$ = 3 Ω; L = 40.0µH

Figure 23: Inductive Switching Energy v/s $R_{G(ext)}$ (V_{DD} = 800V)

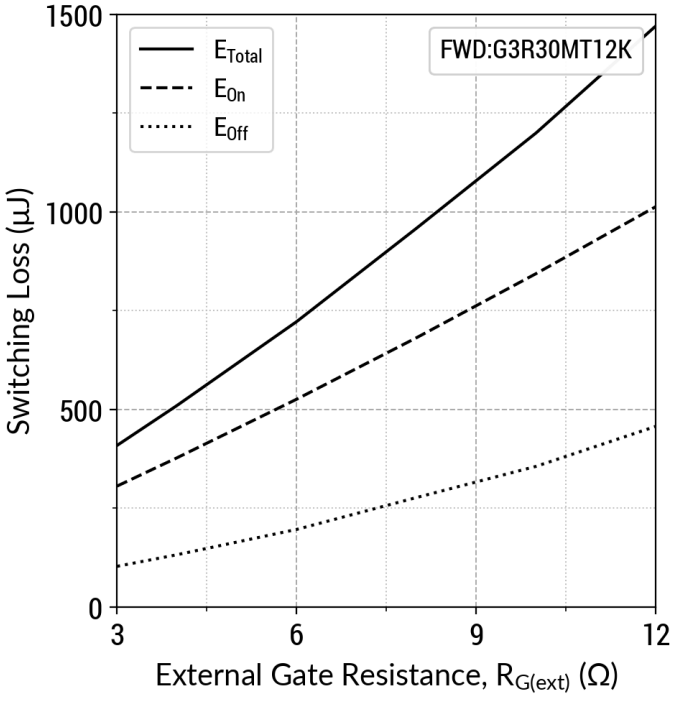

T_j = 25°C; V_{GS} = -5/+15V; I_{DS} = 45 A; L = 40.0µH


Figure 24: Switching Time v/s $R_{G(ext)}$ (V_{DD} = 800V)

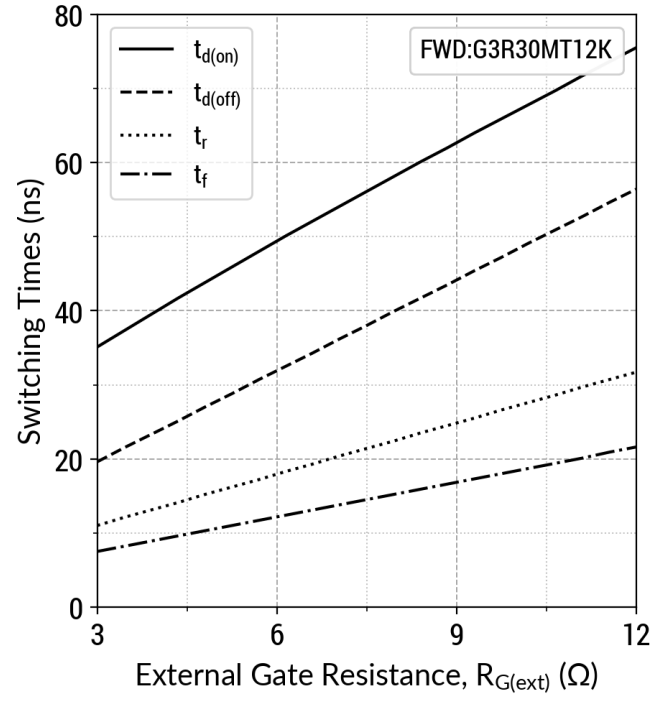

T_j = 25°C; V_{GS} = -5/+15V; I_{DS} = 45 A; L = 40.0µH


Downloaded from Arrow.com.

Figure 25: Inductive Switching Energy v/s Temperature (V_{DD} = 800V)

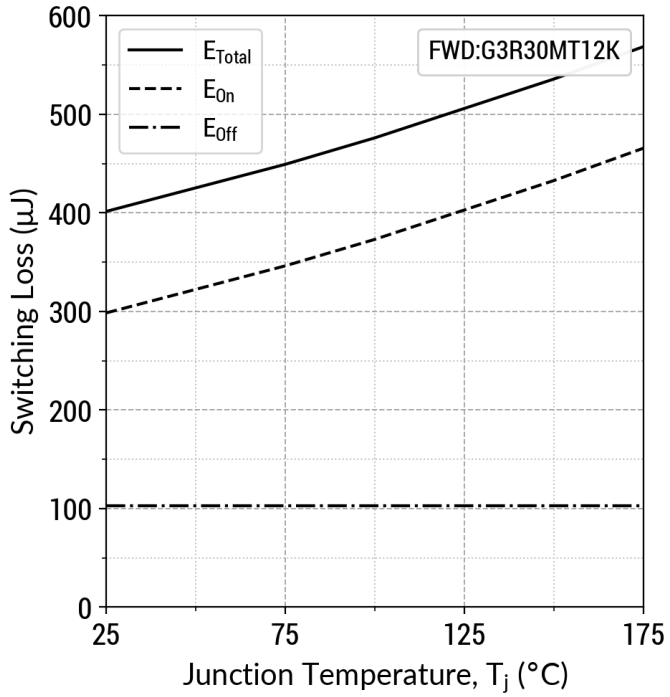

T_j = 25°C; V_{GS} = -5/+15V; $R_{G(ext)}$ = 3 Ω; I_{DS} = 45 A; L = 40.0µH


Figure 26: dV/dt v/s $R_{G(ext)}$ (V_{DD} = 800V)

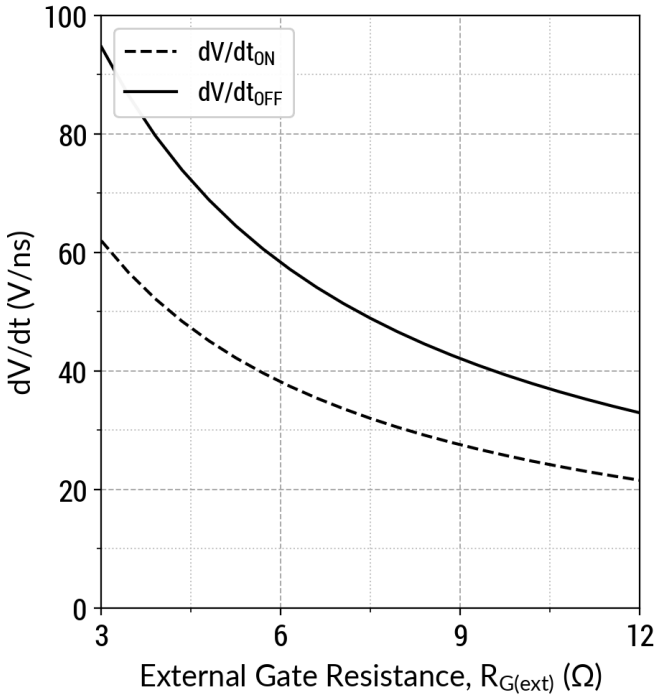


T_j = 25°C; V_{GS} = -5/+15V; I_{DS} = 45 A; L = 40.0µH

Downloaded from Arrow.com.


Gate Charge Circuit

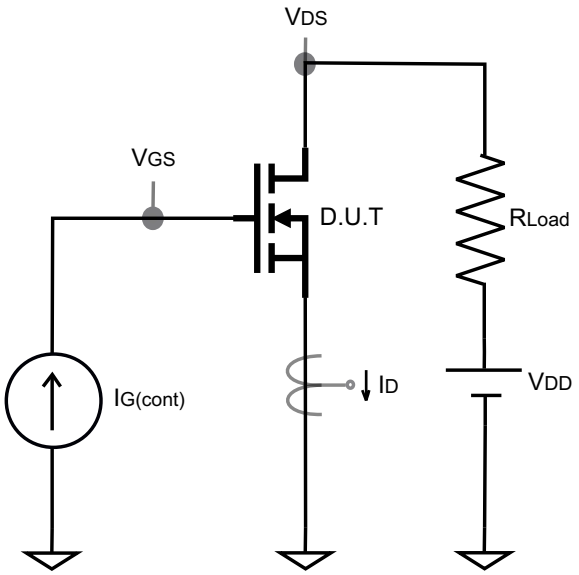


Gate Charge Waveform

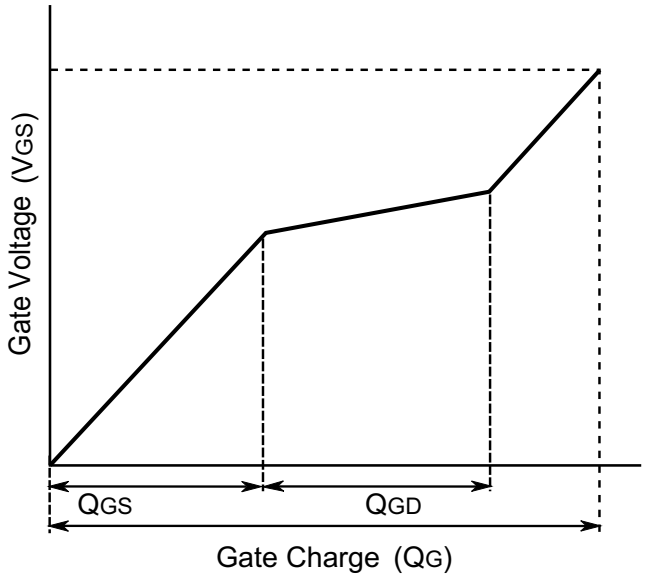

Switching Time Circuit

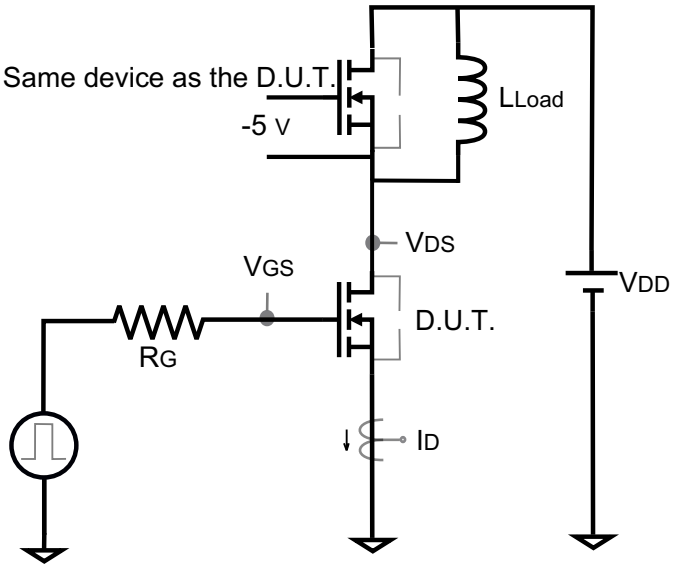


Switching Time Waveform

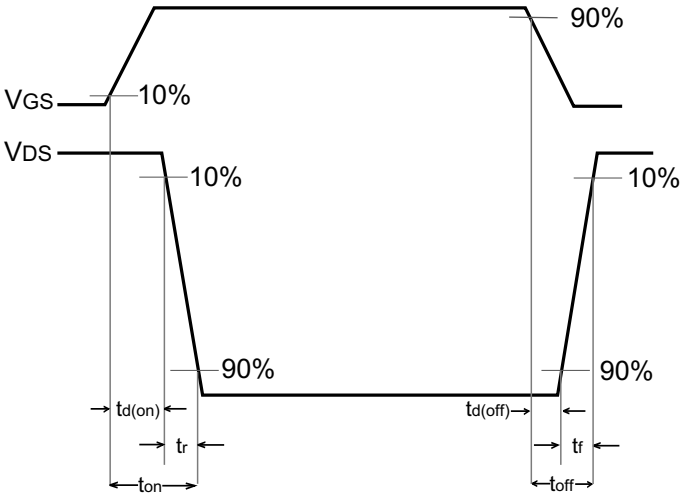


Downloaded from Arrow.com.


Switching Energy Circuit

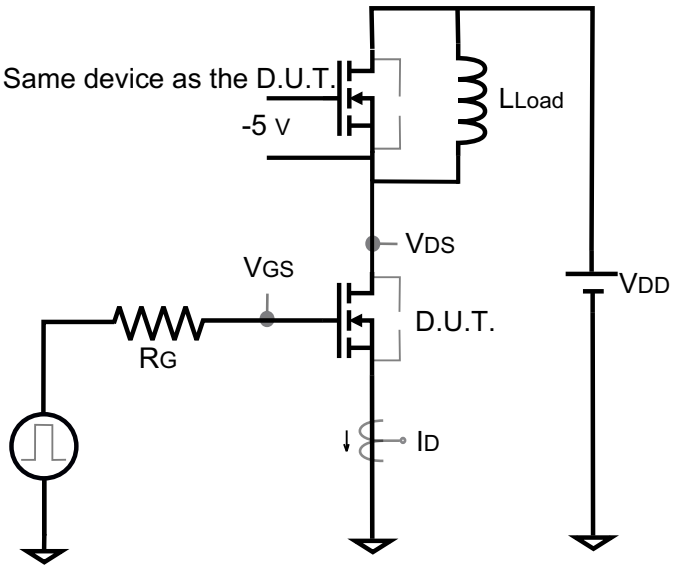


Switching Energy Waveform

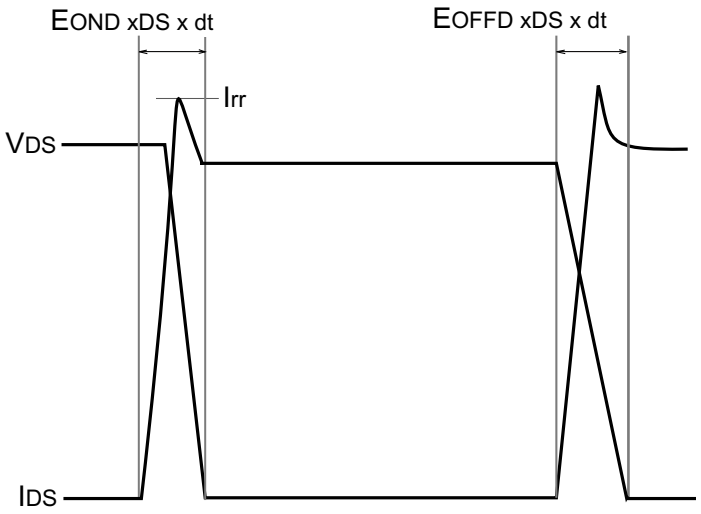

Reverse Recovery Circuit

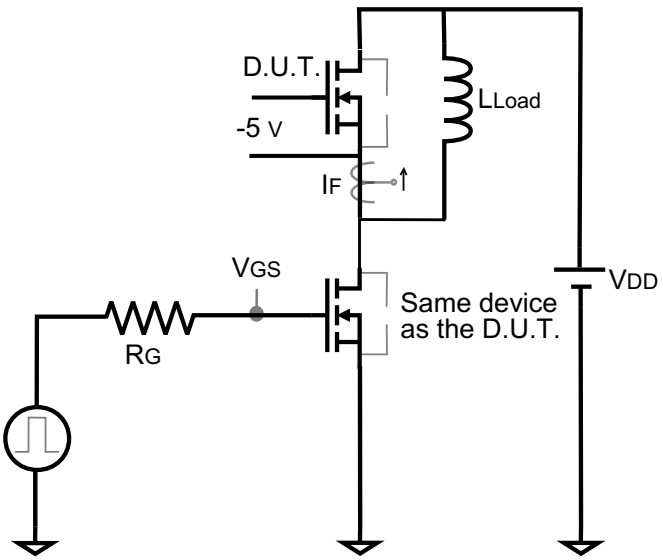


Reverse Recovery Waveform

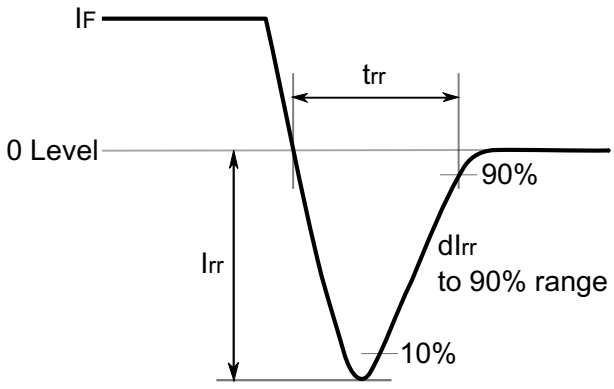


Downloaded from Arrow.com.

Package Dimensions


TO-247-4 Package Outline

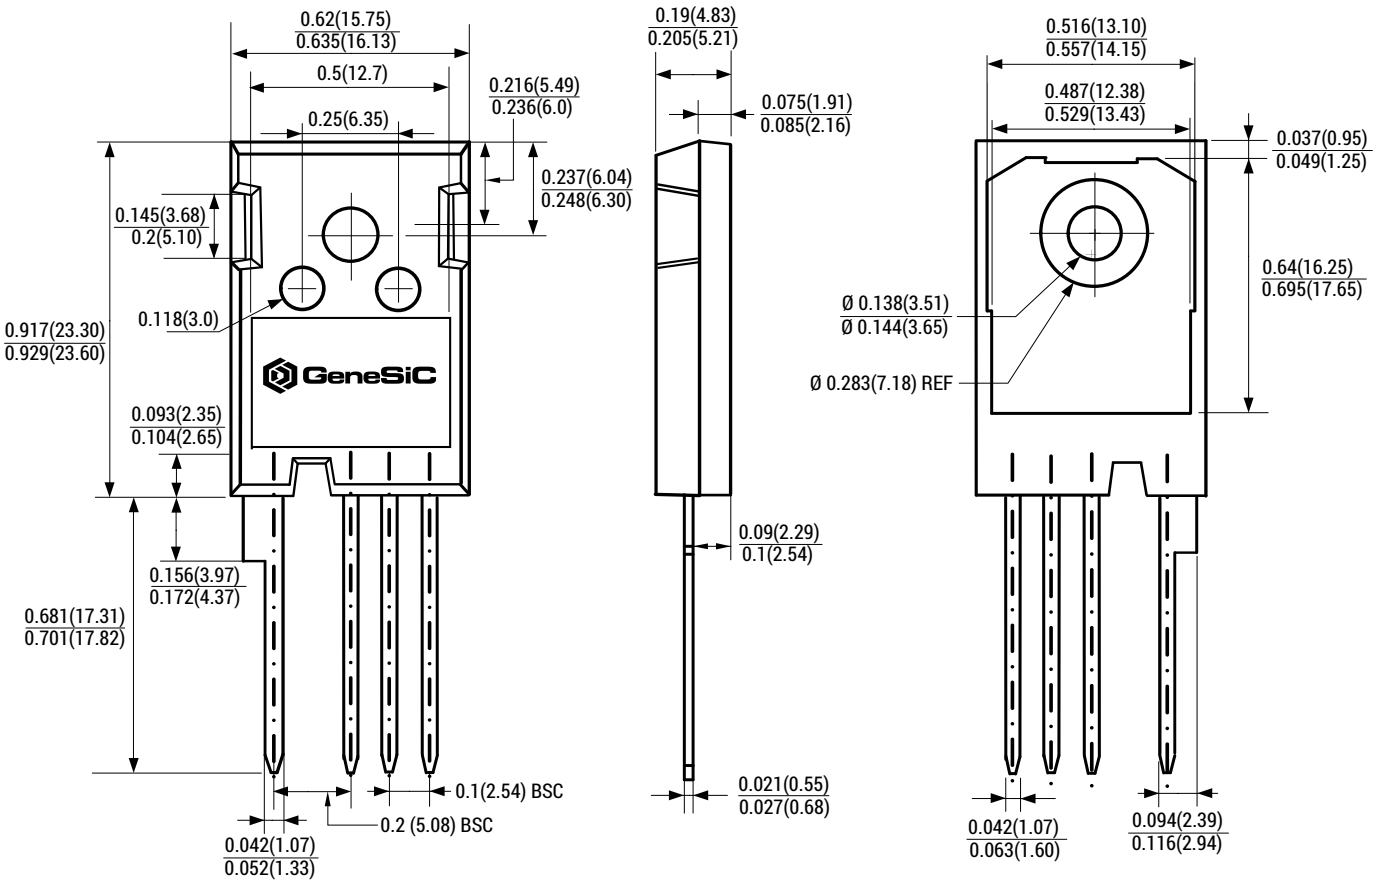

Recommended Solder Pad Layout

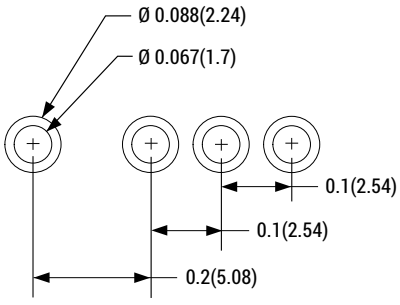

Package View

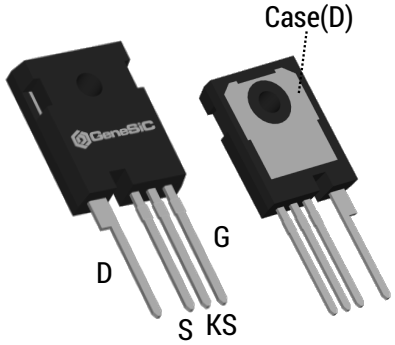

NOTE

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS.
3. THE SOURCE AND KELVIN-SOURCE PINS ARE NOT INTERCHANGABLE. THEIR EXCHANGE MIGHT LEAD TO MALFUNCTION.

Downloaded from Arrow.com.

Compliance

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS 2), as adopted by EU member states on January 2, 2013 and amended on March 31, 2015 by EU Directive 2015/863. RoHS Declarations for this product can be obtained from your GeneSiC representative.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a GeneSiC representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

Disclaimer

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice. GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

Related Links

- SPICE Models: https://www.genesicsemi.com/sic-mosfet/G3R30MT12K/G3R30MT12K_SPICE.zip
- PLECS Models: https://www.genesicsemi.com/sic-mosfet/G3R30MT12K/G3R30MT12K_PLECS.zip
- CAD Models: https://www.genesicsemi.com/sic-mosfet/G3R30MT12K/G3R30MT12K_3D.zip
- Gate Driver Reference: https://www.genesicsemi.com/technical-support
- Evaluation Boards: https://www.genesicsemi.com/technical-support
- Reliability: https://www.genesicsemi.com/reliability
- Compliance: https://www.genesicsemi.com/compliance
- Quality Manual: https://www.genesicsemi.com/quality

Revision History

- Rev 23/Feb: Updated with Most Recent Data
- Supersedes: Rev 20/Jun, Rev 20/Aug, Rev 21/Jan, Rev 21/May

www.genesicsemi.com/sic-mosfet/

Copyright© 2023 GeneSiC Semiconductor Inc.
All Rights Reserved.
Published by GeneSiC Semiconductor, Inc.
43670 Trade Center Place Suite 155, Dulles, VA 20166; USA

Downloaded from Arrow.com.