

H11L1, H11L2, H11L3, H11L4



**ISOCOM**  
COMPONENTS

**MICROPROCESSOR COMPATIBLE  
SCHMITT TRIGGER OPTICALLY  
COUPLED ISOLATOR**



**DESCRIPTION**

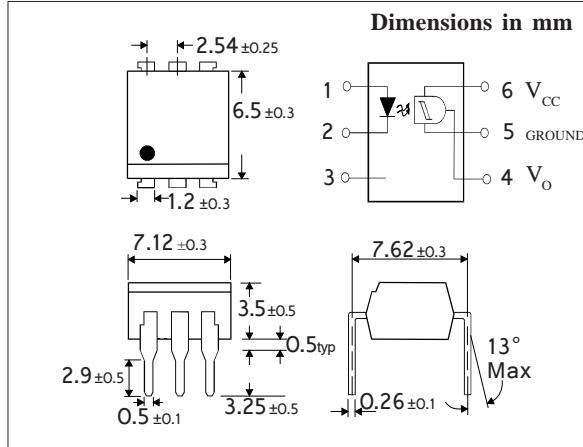
The H11L1, 2, 3, 4 series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode and a Microprocessor Compatible Schmitt trigger output mounted in a standard 6 pin dual in line package.

**FEATURES**

- Options :-
  - 10mm lead spread - add G after part no.
  - Surface mount - add SM after part no.
  - Tape&reel - add SMT&R after part no.
- High data rate, 1MHz typical (NRZ)
- Microprocessor compatible drive
- Logic compatible output sinks 16 milliamperes at 0.4 volts maximum
- High Isolation Voltage (5kV<sub>RMS</sub>, 7kV<sub>PK</sub>)
- High common mode rejection ratio
- Fast switching : t<sub>rise</sub>, t<sub>fall</sub> = 100nS typical
- Wide supply voltage capability, compatible with all popular logic systems
- Guaranteed On / Off threshold hysteresis

**APPLICATIONS**

- Logic to logic isolator
- Line receiver-eliminates noise and transient problems
- Programmable current level sensor
- AC to TTL conversion - square wave shaping
- Digital programming of power supplies
- Interfaces computers with peripherals



**ABSOLUTE MAXIMUM RATINGS  
(25°C unless otherwise specified)**

Storage Temperature	-40°C to +125°C
Operating Temperature	-25°C to +85°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

**INPUT DIODE**

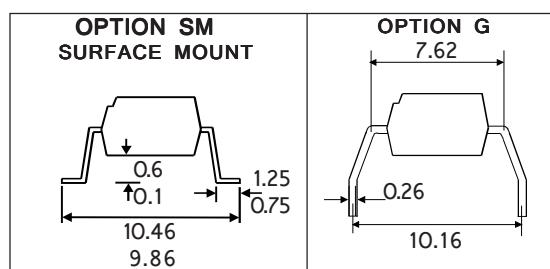
Forward Current, I <sub>F</sub>	50mA
Peak forward current (Pulse width ≤ 100μS, Duty ratio=0.001)	1A
Reverse Voltage, V <sub>R</sub>	6V
Power Dissipation (derate linearly 1.41mW / °C above 25°C)	70mW

**OUTPUT DETECTOR**

Output Voltage, V <sub>CC</sub>	16V
Supply Voltage, V <sub>OH</sub>	16V
Output current, I <sub>OL</sub>	50mA
Power Dissipation (derate linearly 2mW / °C above 25°C)	150mW

**POWER DISSIPATION**

Total Power Dissipation (derate linearly 2.94mW/ °C above 25°C)	170mW
--	-------



**ISOCOM COMPONENTS 2004 LTD**

Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1UD  
Tel: (01429) 863609 Fax: (01429) 863581

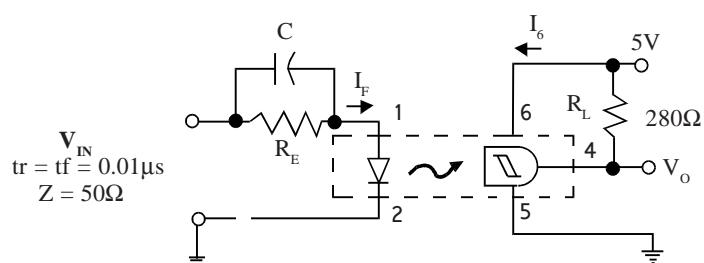
### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ Unless otherwise noted )

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ ) Forward Voltage ( $V_F$ ) Reverse Current ( $I_R$ ) Capacitance ( $C_J$ )	0.75		10 100	V $\mu\text{A}$ pF	$I_F = 0.3\text{mA}$ $I_F = 10\text{mA}$ $V_R = 3\text{V}$ $V = 0, f = 1\text{MHz}$
Output	Operating Voltage Range ( $V_{CC}$ ) Supply Current $I_6$ (off) Output Current High ( $I_{OH}$ )	3	1.6	15 5 100	V mA $\mu\text{A}$	$I_F = 0\text{mA}, V_{CC} = 5\text{V}$ $I_F = 0\text{mA}, V_{CC} = V_O = 15\text{V}$
Coupled	Supply Current $I_6$ (on) Output Voltage, Low ( $V_{OL}$ ) Turn-on Threshold Current $I_F$ (on) H11L1 H11L2 H11L3 H11L4 Turn-off Threshold Current $I_F$ (off) Hysteresis Ratio $I_F$ (off) / $I_F$ (on) Input to Output Isolation Voltage $V_{ISO}$ High to Low Propagation time Fall Time Low to High Propagation time Rise Time		1.6	5 0.4 1.6 10 5 2 0.3 0.5 5000 7000	mA V mA mA mA mA mA mA V <sub>RMS</sub> V <sub>PK</sub>	$I_F = 10\text{mA}, V_{CC} = 5\text{V}$ $R_L = 270\Omega, V_{CC} = 5\text{V}$ See note 1 See note 1 $R_E = 280\Omega$ $V_{CC} = 5\text{V}$ $I_F = 4\text{mA}$


Note 1 Measured with input leads shorted together and output leads shorted together for 1 minute






Note 2 Special Selections are available on request. Please consult the factory.

### SWITCHING CHARACTERISTICS



SWITCHING TEST CIRCUIT

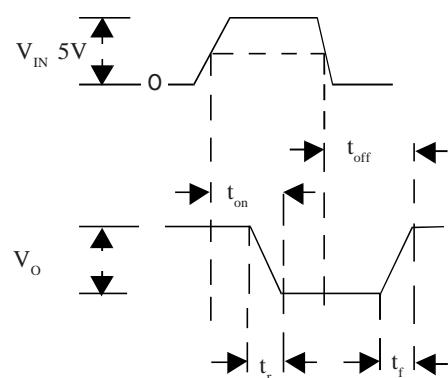

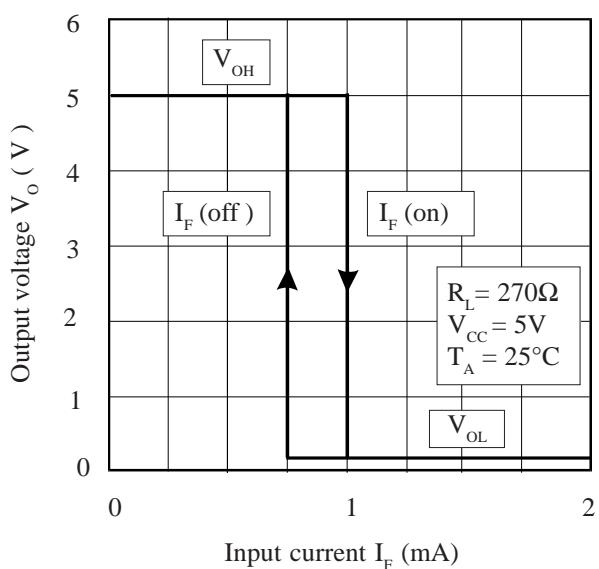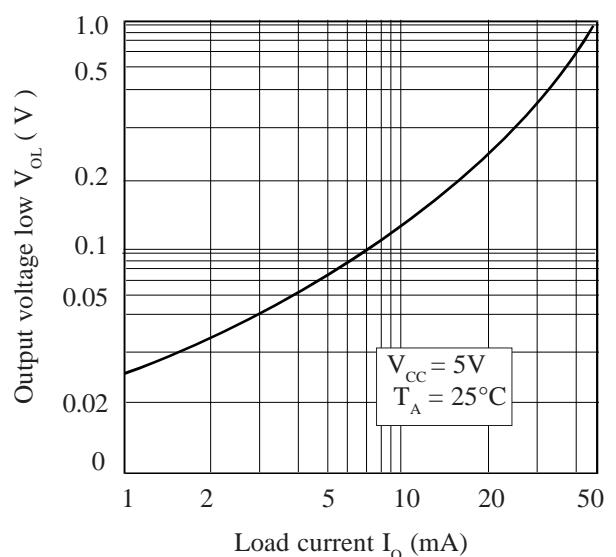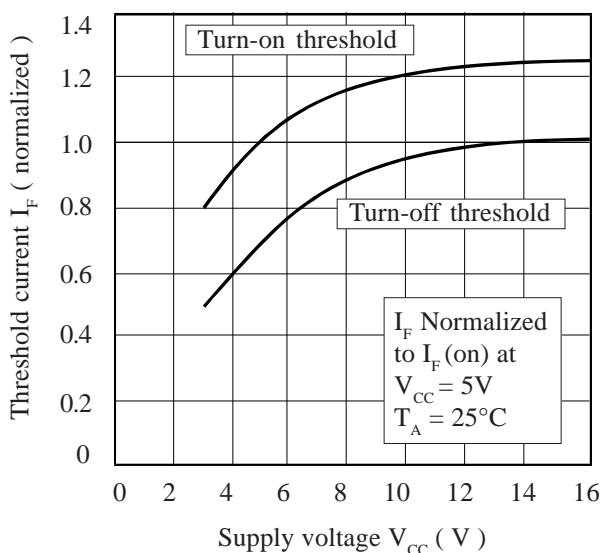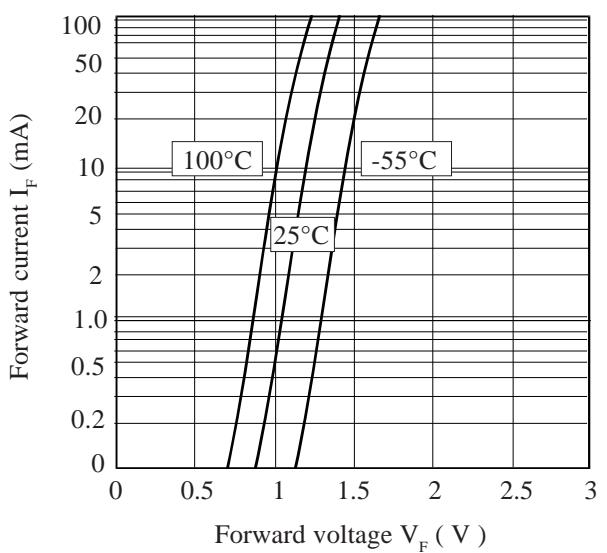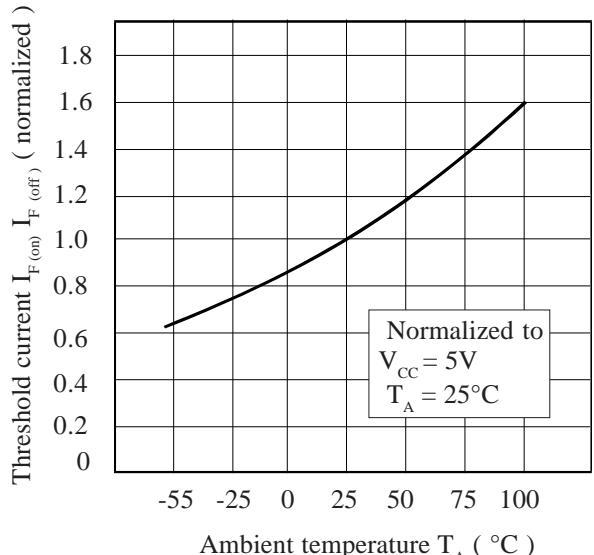**Transfer Characteristics****On Voltage vs. Load Current****Threshold Current vs. Supply Voltage****Forward Voltage vs. Forward Current****Threshold Current vs. Ambient Temperature****Supply Current vs. Supply Voltage**