


Ø16mm XA Series Emergency Stop Switches (Unibody Type)

Only 19.5mm behind the panel, compact Ø16mm emergency stop switches.



Ideal for installing in equipment which has mounting limitations



Easy to Reset

Push-to-lock, Pull/turn-to-reset

Resetting is possible by either pulling or turning the button, allowing for easy operation.

Unlatching by pulling




Unlatching by turning



IDEC's emergency stop switches value safety.

Safety Potential Structure

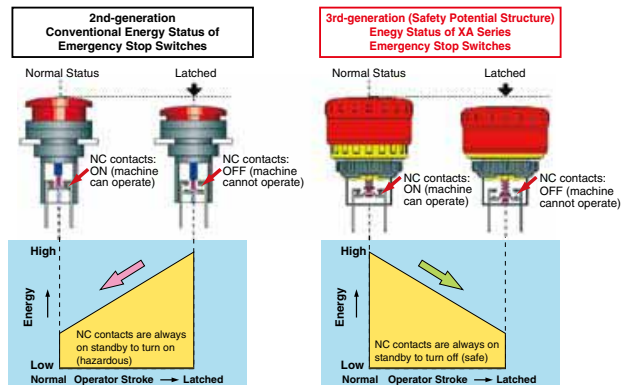

With XA emergency stop switches, the potential energy level of the latched status is lower than that of normal status. In the event the switch is damaged due to excessive shocks, the NC contacts will turn off, thus stopping the machine (patented).

Direct Opening Action

Achievement of contact separation (of a contact element) of the switch actuator through a direct mechanical link (for example not dependent upon springs) (IEC 60947-5-5; 5.2, IEC 60947-5-1; Annex K)



Safe Lock Mechanism

The emergency stop signal shall be maintained until the emergency stop device is reset (disengaged). (IEC 60947-5-5; 6.2)

International Safety Standards




IDEC CORPORATION

Ø16

Small, unibody emergency stop switches suitable for equipment with small mounting space. Requires only ø16mm × 19.5mm for installation.

- Ø29mm and Ø40mm mushroom operators
- Degree of protection IP65 and IP40 (IEC 60529)
- Emergency stop switch operators are available in red (Munsell 5R4/12)
- Stop switch operators come in yellow or gray
- Gold-plated crossbar contacts
- Push-to-lock, pull or turn-to-reset operator
- UL, c-UL recognized. EN compliant.
- Safety lock mechanism (IEC 60947-5-5, 6.2)
- Direct opening action mechanism (IEC 60947-5-5, 5.2, IEC 60947-5-1, Annex K)

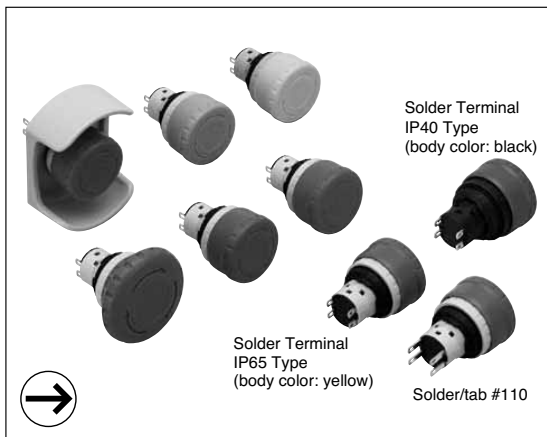

Standards

Standards	Mark	Organization/File No.
UL508 CSA C22.2 No.14		UL/c-UL File No. E68961
EN60947-5-5 (Note)		TÜV SÜD
		European Commission's Low Voltage Directive

Note: Except for stop switches (operator color: yellow and gray)

Contact Ratings

Rated Insulation Voltage (Ui)			250V		
Thermal Current (Ith)			5A		
Rated Operating Voltage (Ue)			30V	125V	250V
Rated Operating Current	AC 50/60Hz	Resistive Load (AC-12)	—	5A	3A
		Inductive Load (AC-15)	—	3A	1.5A
	DC	Resistive Load (DC-12)	2A	0.4A	0.2A
		Inductive Load (DC-13)	1A	0.22A	0.1A

- Minimum applicable load: 5V AC/DC, 1 mA (reference value)
(May vary depending on the operating conditions and load.)
- The rated operating currents are measured at resistive/inductive loads as specified in IEC 60947-5-1.

Specifications

Applicable Standards	UL508, CSA C22.2 No.14 IEC 60947-5-1, EN 60947-5-1 IEC 60947-5-5 (Note), EN 60947-5-5 (Note) JIS C8201-5-1
Operating Temperature	-25 to +60°C (no freezing)
Operating Humidity	45 to 85% RH (no condensation)
Storage Temperature	-45 to +80°C (no freezing)
Operating Force	Push-to-lock: 10.5N Pull to reset: 10N Turn to reset: 0.16 N·m
Minimum Force Required for Direct Opening Action	40N
Minimum Operator Stroke Required for Direct Opening Action	4.0 mm
Maximum Operator Stroke	4.5 mm
Contact Resistance	50 mΩ maximum (initial value)
Insulation Resistance	100 MΩ minimum (500V DC megger)
Overvoltage Category	II
Impulse Withstand Voltage	2.5 kV
Pollution Degree	3
Operating Frequency	900 operations/hour
Shock Resistance	Operating extremes: 150 m/s ² Damage limits: 1000 m/s ²
Vibration Resistance	Operating extremes: 10 to 500 Hz, amplitude 0.35mm, acceleration 50 m/s ² Damage limits: 10 to 500 Hz, amplitude 0.35 mm, acceleration 50 m/s ²
Durability	Mechanical: 250,000 Electrical: 100,000 250,000 (24V AC/DC, 100mA)
Degree of Protection	IP65, IP40 (IEC 60529)
Short-circuit Protection	250V/10A fuse (Type aM IEC 60269-1/IEC 60269-2)
Conditional Short-circuit Current	1000A
Terminal Style	Solder terminal, Solder/tab #110 terminal
Recommended Tightening Torque for Locking Ring	0.88 N·m
Applicable Wire Size	1.25 mm ² maximum (AWG16 maximum)
Terminal Soldering Condition	310 to 350°C, within 3 seconds
Weight (approx.)	ø29mm mushroom: 14g ø40mm mushroom: 17g

Note: Except for stop switches (operator color: yellow and gray)

XA Series Emergency Stop Switches (Unibody Type) ø16

Part Numbers

• Solder Terminal Type Emergency Stop Switches

Shape	Contact	Part No.	
		IP40 (contact part: black)	IP65 (contact part: yellow)
 	1NC	XA1E-BV3U01K-R	XA1E-BV3U01-R
	2NC	XA1E-BV3U02K-R	XA1E-BV3U02-R
 	1NC	XA1E-BV4U01K-R	XA1E-BV4U01-R
	2NC	XA1E-BV4U02K-R	XA1E-BV4U02-R



• Solder/tab #110 terminal is also available. Specify "T" before "R" in the Part Number.
For example, XA1E-BV3U02K-R becomes XA1E-BV3U02KT-R.

• Solder Terminal Type Stop Switches

Shape	Operator Type	Contact	Part No.		① Operator Color Code
			IP40 (contact part: black)	IP65 (contact part: yellow)	
 	ø29mm Mushroom	1NC	XA1E-BV3U01K-①	XA1E-BV3U01-①	Y: yellow N: gray
		2NC	XA1E-BV3U02K-①	XA1E-BV3U02-①	
	ø40mm Mushroom	1NC	XA1E-BV4U01K-①	XA1E-BV4U01-①	
		2NC	XA1E-BV4U02K-①	XA1E-BV4U02-①	

• Solder/tab #110 terminal is also available. Specify "T" before "①" in the Part Number.
For example, XA1E-BV3U02K-Y becomes XA1E-BV3U02KT-Y.

Dimensions

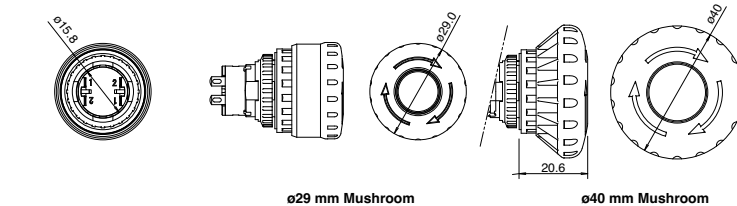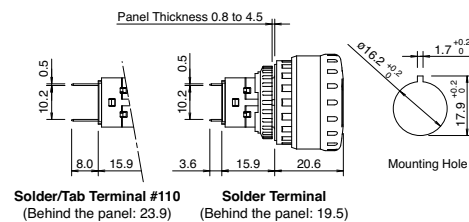


ø29 mm Mushroom


ø40 mm Mushroom

All dimensions in mm.

Terminal Arrangement (Bottom View)



Mounting Hole Layout

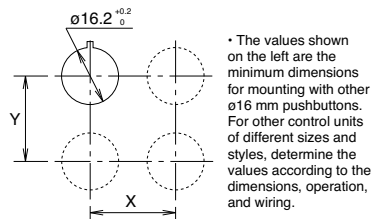

	X	Y
ø29mm Mushroom	40 mm minimum	
ø40mm Mushroom	50 mm minimum	

